Automation Panel 800 User's Manual

Version: 1.70 (June 2007)

Model number: MAAP800-ENG

All information contained in this manual is current as of its creation/publication. We reserve the right to change the contents of this manual without warning. The information contained herein is believed to be accurate as of the date of publication; however, Bernecker + Rainer Industrie-Elektronik Ges.m.b.H. makes no warranty, expressed or implied, with regard to the products or the documentation contained within this book. In addition, Bernecker + Rainer Industrie-Elektronik Ges.m.b.H. shall not be liable in the event of incidental or consequential damages in connection with or resulting from the furnishing, performance, or use of these products. The software names, hardware names, and trademarks used in this document are registered by the respective companies.

Chapter 1: General information Chapter 2: Technical data Chapter 3: Commissioning Chapter 4: Software Chapter 5: Standards and certifications Chapter 6: Accessories

Chapter 7: Maintenance / Servicing Appendix A Figure index Table index Model number index Index

Chapter 1: General information	11
1. Manual history	
2. Safety guidelines	13
2.1 Intended use	
2.2 Protection against electrostatic discharges	13
2.2.1 Packaging	13
2.2.2 Guidelines for proper ESD handling	13
2.3 Policy and procedures	14
2.4 Transport and storage	14
2.5 Installation	15
2.6 Operation	
2.6.1 Protection against touching electrical parts	15
2.6.2 Programs, viruses and dangerous programs	15
3. Organization of safety notices	16
4. Guidelines	16
5. Model numbers	17
5.1 Display units	17
5.2 Extension units	17
5.3 Cable	18
5.4 Accessories	
5.4.1 USB flash drives	
5.4.2 Legend strip templates	
5.4.3 Miscellaneous	20
Chapter 2: Technical data	21
1. General information	21
1. General information	21 22
General information 1.1 Features 1.2 System components / Configuration	21 22 23
General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system	21 22 23
General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components	21 22 23 23
General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration	21 23 23 24 25
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1	21 23 23 24 25 27
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components	21 22 23 23 24 25 27
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2	21 23 23 24 25 27 28 29
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components	21 23 23 24 25 27 28 29 30
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3	21 22 23 24 25 27 28 29 30 31
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components	21 22 23 24 25 27 28 29 30 31 32
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components	21 22 23 24 25 27 28 29 30 31 32
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3. Individual components	21 22 23 24 25 27 28 30 31 32 33
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00	21 22 23 24 25 27 28 30 31 32 33 33
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00 3.1.2 5AP880.1505-00	21 22 23 24 25 27 27 30 31 32 33 33 33
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00 3.1.2 5AP880.1505-00 3.1.3 Pin assignments	21 22 23 23 24 25 27 28 29 30 31 32 33 33 33 33 37 42 42 42
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00 3.1.2 5AP880.1505-00 3.1.3 Pin assignments 3.2 Extension units	21 22 23 24 25 27 30 31 32 33 33 33 37 42 44
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00 3.1.2 5AP880.1505-00 3.1.3 Pin assignments 3.2 Extension units 3.2 Extension keyboard 5AC800.EXT1-00	21 22 23 23 24 25 27 28 30 31 32 33 33 33 33 37 42 44 44 44
1. General information 1.1 Features 1.2 System components / Configuration 1.2.1 Selection guide - basic system 1.2.2 Selection guide - optional components 2. Configuration 2.1 Example 1 2.1.1 Overview of the required components 2.2 Example 2 2.2.1 Overview of the required components 2.3 Example 3 2.3.1 Overview of the required components 3. Individual components 3.1 Display units 3.1.1 5AP820.1505-00 3.1.2 5AP880.1505-00 3.1.3 Pin assignments 3.2 Extension units	21 22 23 23 24 25 27 28 30 31 32 33 33 33 33 37 42 44 44 48

Table of contents

3.2.4 C key extension 8PB left 5AC800.EXT3-00	
3.2.5 C key extension 8PB right 5AC800.EXT3-01	57
3.2.6 C key extension 12PB ES left 5AC800.EXT3-02	60
3.2.7 C key extension 12PB ES right 5AC800.EXT3-03	
3.2.8 C key extension 8PB ES left 5AC800.EXT3-04	
3.2.9 C key extension 8PB ES right 5AC800.EXT3-05	72
3.3 Extension connector / flange	
3.3.1 Extension cover 5AC800.COV1-00	
3.3.2 USB extension cover 5AC800.COV2-00	
3.3.3 Extension connector 5AC800.CON1-00	
3.3.4 Extension connector 60° 5AC800.CON2-00	
3.3.5 Extension flange 5AC800.FLG1-00	
3.4 Cables	
3.4.1 Overview	
3.4.2 SDL cable 5CASDL.0xxx-20 Rev. < A5	87
3.4.3 SDL cable with extender 5CASDL.0xxx-30 Rev. < A5	89
3.4.4 SDL cable 5CASDL.0xxx-20 Rev. ≥ A5	91
3.4.5 SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5	94
3.4.6 Voltage supply cable 5CAPWR.0xxx-20	97
3.4.7 X2X cable 5CAX2X.0xxx-20	99
Chapter 3: Commissioning	101
1. X2X wiring diagram	101
1.1 X2X functionality if the PC crashes	102
2. E-stop wiring diagram	
2.1 Without extension unit	
2.2 Extension unit with E-stop	
2.3 Extension unit without E-stop	
2.4 Current load	
3. Installation	
3.1 Installation of components	
3.2 Mounting orientation	
4. Connection examples	
4.1 Selecting the display units	
4.2 An Automation Panel 800 via SDL (onboard)	
4.2.1 Basic system requirements	
4.2.2 Cable	
4.2.3 BIOS settings	
4.2.4 Windows graphics driver settings	
4.2.5 Settings - Windows touch driver	
4.3 An AP900 and an AP800 via SDL (onboard)	115
4.3.1 Basic system requirements	
4.3.2 Cable	
4.3.2 Cable	116
4.3.3 BIOS settings	116 117
	116 117 117

4	4.4 Three AP900 devices with an AP800 via SDL (onboard)	118
	4.4.1 Basic system requirements	
	4.4.2 Cable	119
	4.4.3 BIOS settings	120
	4.4.4 Windows graphics driver settings	120
	4.4.5 Settings - Windows touch driver	
4	4.5 Six AP900 and two AP800 devices via SDL (onboard) and SDL (AP Link)	121
	4.5.1 Basic system requirements	
	4.5.2 Cable	122
	4.5.3 BIOS settings	124
	4.5.4 Windows graphics driver settings	124
	4.5.5 Settings - Windows touch driver	124
4	4.6 Internal numbering of the extension units	125
5. I	Key and LED configurations	126
5	5.1 Display unit	
	5.1.1 5AP880.1505-00	127
5	5.2 Extension units	
	5.2.1 Extension keyboard 5AC800.EXT1-00	128
	5.2.2 F key extension left 5AC800.EXT2-00 / right 5AC800.EXT2-01	128
	5.2.3 C key extension 8PB left 5AC800.EXT3-00 / right 5AC800.EXT3-01	
	5.2.4 C key extension 12PB left 5AC800.EXT3-02 / right 5AC800.EXT3-03	
	5.2.5 C key extension 8PB left 5AC800.EXT3-04 / right 5AC800.EXT3-05	131
Cł	hapter 4: Software	133
	B&R Key Editor information	
	HMI Drivers & Utilities DVD 5SWHMI.0000-00	
Cł	hapter 5: Standards and certifications	139
	Applicable European guidelines	
	Overview of standards	
	Emission requirements	
	3.1 Network related emissions	
	3.2 Emissions, electromagnetic emissions	
	Requirements for immunity to disturbances	
4	4.1 Electrostatic discharge (ESD)	
	4.1 Electrostatic discharge (ESD)	144
4	4.1 Electrostatic discharge (ESD)	144 145
	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges	144 145 145
4	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances	144 145 145 145
4	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies	144 145 145 146
4	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies 4.7 Damped vibration	
4 4 5. (4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies 4.7 Damped vibration Climate conditions	
5. (5	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies 4.7 Damped vibration Climate conditions 5.1 Dry heat	
5. 0 6. \$	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies 4.7 Damped vibration Climate conditions	
5. (6 6. \$	4.1 Electrostatic discharge (ESD) 4.2 High-frequency electromagnetic fields (HF field) 4.3 High-speed transient electrical disturbances (burst) 4.4 Surges 4.5 Conducted disturbances 4.6 Magnetic fields with electrical frequencies 4.7 Damped vibration Climate conditions 5.1 Dry heat Safety	

Table of contents

6.3 Protection type	148
7. International certifications	
8. SDL flex cable - test description	150
8.1 Torsion	150
8.1.1 Structure of the test	150
8.1.2 Test conditions	
8.1.3 Individual tests	
8.2 Cable drag chain	151
8.2.1 Structure of the test	
8.2.2 Test conditions	151
8.2.3 Individual tests:	151
Chapter 6: Accessories	153
1. Overview	153
2. USB flash drive	
2.1 General information	
2.2 Order data	
2.3 Technical data	
2.3.1 Temperature humidity diagram - operation and storage	
2.4 Contents of delivery	
2.5 Creating a bootable USB flash drive	
2.5.1 Requirements	
2.5.2 Procedure	
3. Legend strip templates	
3.1 Order data	
Chapter 7: Maintenance / Servicing	161
1. Cleaning	161
2. Exchanging the legend strips	162
2.1 Procedure	162
2.1.1 Display	162
2.1.2 Extension units	164
A managed the A	405
Appendix A	
1. E-stop button	
2. Key switch	
2.1 Angle of rotation	
3. Touch screen	
3.1 Elo	
3.1.1 Temperature humidity diagram - operation and storage	
3.1.2 Cleaning	
4. Mylar	
5. Perspectives	
6. Glossary	173

Chapter 1 • General information

1. Manual history

Version	Date	Change
0.01 Preliminary	17.07.2006	- First version
1.00	28.08.2006	Changes / new features - Chapter "Standards and certifications" on page 139 added. - Chapter "Software" on page 133 added. - Chapter "Commissioning" on page 101 added. - Chapter "Accessories" on page 153 added. - "Glossary" on page 173 added - Table "Technical data - key switch switching element and key switch" on page 167 added. - Model number overview revised. - Accessories added. - Safety guidelines "Protection against electrostatic discharges" on page 13 added. - "Pin assignments" on page 42 added - Dimensions of extension units added. - Selection guide added, (see section "System components / Configuration" on page 23).
1.10	30.08.2006	Changes / new features - Key dimensions added. - Numbering of the extensions corrected (see "Connection examples" on page 111). - X2X cable pin assignments added. - "X2X functionality if the PC crashes" on page 102 added - "Internal numbering of the extension units" on page 125 added - Cable photos added.
1.20	03.10.2006	Changes / new features - "SDL cable with extender 5CASDL.0xxx-30 Rev. < A5" on page 89 added - "Extension flange 5AC800.FLG1-00" on page 84 changed "Key and LED configurations" on page 126 changed "USB extension cover 5AC800.COV2-00" on page 78and "Dimensions - USB extension cover 5AC800.COV2-00" on page 79 added - Touch screen precision changed "Selecting the display units" on page 111 added - Chapter 7 "Maintenance / Servicing" on page 161 added Mounting orientation revised, +45° and -45° added Connection examples revised (description of USB support, graphics) Cable pin assignments revised and corrected Plug measurements (ODU Minisnap) added 30° extension connector changed to 60° extension connector and dimensions changed.
1.30	15.11.2006	Changes / new features - "Pin assignments, X2X cable 5CAX2X.0xxx-20" on page 100 changed. - 2 USB flash drive 5MMUSB.2048-00 from SanDisk added. - Pin assignments - X2X - E-stop cable connection changed (pin 7 and pin 8). - Perspective description modified. - Key switch information modified. - German terminology for key switch changed. - Technical data on pages 52 and 74 added. - Technical data on page 95 added.

Table 1: Manual history

General information • Manual history

Version	Date	Change
1.40	19.02.2007	Changes / new features - Hardware numbers for Illuminated Ring Keys corrected. - Descriptions of F-Keys and C-Keys on extension units added. - "Installation of components" on page 108 added - Contents of delivery added for extension connector, extension covers and extension flange. - Technical data for SDL cables Rev. ≥ A5 changed. - "SDL flex cable - test description" on page 150 added - Section about exchanging legend strips 2.1.2 "Extension units" on page 164 added. - Tolerances for voltage supply cable 5CAPWR.0xxx-20 added.
1.50	13.04.2007	Changes / new features - USB flash drive 5MMUSB.0256-00 and USB flash drive 5MMUSB.1024-00 cancelled - Hardware numbers for the key switch corrected in figure 108 "Hardware numbers - 5AC800.EXT3-02 / 5AC800.EXT3-03" on page 130 and figure 109 "Hardware numbers - 5AC800.EXT3-04 / 5AC800.EXT3-05" on page 131. - Photos added to section "Exchanging the legend strips" on page 162. - Section "USB flash drive" on page 154 updated. - Figures of extension units with illuminated ring keys added.
1.60	05.06.2007	Changes / new features - Description of the X2X Link supply voltage revised.´ - X2X cable order numbers corrected.
1.70	11.06.2007	Changes / new features - Section "Connection examples" on page 111 updated.

Table 1: Manual history (cont.)

2. Safety guidelines

2.1 Intended use

Programmable logic controllers (PLCs), operating and monitoring devices (industrial PCs, Power Panels, Mobile Panels, etc.), and B&R uninterruptible power supplies have been designed, developed, and manufactured for conventional use in industry. They were not designed, developed, and manufactured for any use involving serious risks or hazards that could lead to death, injury, serious physical damage, or loss of any kind without the implementation of exceptionally stringent safety precautions. In particular, such risks and hazards include the use of these devices to monitor nuclear reactions in nuclear power plants, as well as flight control systems, flight safety, the control of mass transit systems, medical life support systems, and the control of weapons systems.

2.2 Protection against electrostatic discharges

Electrical components that are vulnerable to electrostatic discharge (ESD) must be handled accordingly.

2.2.1 Packaging

- <u>Electrical components with housing</u>
 ... do not require special ESD packaging, but must be handled properly (see "Electrical components with housing").
- <u>Electrical components without housing</u>
 ... must be protected by ESD-suitable packaging.

2.2.2 Guidelines for proper ESD handling

Electrical components with housing

- Do not touch the contacts of connectors on connected cables.
- Do not touch the contact tips on the circuit boards.

Electrical components without housing

In addition to "Electrical components with housing", the following also applies:

- Any persons handling electrical components or devices that will be installed in the electrical components must be grounded.
- Components can only be touched on the small sides or on the front plate.
- Components should always be stored in a suitable medium (ESD packaging, conductive foam, etc.).
 - Metallic surfaces are not suitable storage surfaces!

General information • Safety guidelines

- Electrostatic discharges should be avoided on the components (e.g. through charged plastics).
- A minimum distance of 10 cm must be kept from monitors and TV sets.
- Measurement devices and equipment must be grounded.
- Measurement probes on potential-free measurement devices must be discharged on sufficiently grounded surfaces before taking measurements.

Individual components

 ESD protective measures for individual components are thoroughly integrated at B&R (conductive floors, footwear, arm bands, etc.).

The increased ESD protective measures for individual components are not necessary for our customers for handling B&R products.

2.3 Policy and procedures

Electronic devices are generally not failsafe. In the event of a failure on the programmable control system, operating or monitoring device, or uninterruptible power supply, the user is responsible for ensuring that other devices that may be connected, e.g. motors, are in a secure state.

Both when using programmable logic controllers and when using operating and monitoring devices as control systems in conjunction with a soft PLC (e.g. B&R Automation Runtime or comparable products) or a slot PLC (e.g. B&R LS251 or comparable products), the safety precautions applying to industrial control systems (e.g. the provision of safety devices such as emergency stop circuits, etc.) must be observed in accordance with applicable national and international regulations. The same applies for all other devices connected to the system, such as drives.

All tasks such as installation, commissioning, and maintenance are only permitted to be carried out by qualified personnel. Qualified personnel are persons who are familiar with the transport, mounting, installation, commissioning, and operation of the product and who have the appropriate qualifications (e.g. IEC 60364). National accident prevention guidelines must be followed.

The safety guidelines, connection descriptions (rating plate and documentation) and limit values listed in the technical data must be read carefully and must be observed before installation and commissioning.

2.4 Transport and storage

During transport and storage, devices must be protected from excessive stress (mechanical load, temperature, humidity, aggressive atmosphere, etc.).

2.5 Installation

- Installation must take place according to the documentation, using suitable equipment and tools.
- Devices may only be installed without voltage applied and by qualified personnel.
- General safety regulations and nationally applicable accident prevention guidelines must be observed.
- Electrical installation must be carried out according to the relevant guidelines (e.g. line cross section, fuse, protective ground connection).

2.6 Operation

2.6.1 Protection against touching electrical parts

To operate programmable logic controllers, operating and monitoring devices, and uninterruptible power supplies, certain components must carry dangerous voltage levels of over 42 VDC. A life-threatening electrical shock could occur if you come into contact with these parts. This could result in death, severe injury, or material damage.

Before turning on the programmable logic controller, the operational and monitoring devices and the uninterruptible power supply, ensure that the housing is properly grounded (PE rail). The ground connection must be established when testing the operating and monitoring devices or the uninterruptible power supply, even when operating them for only a short time.

Before turning the device on, make sure that all voltage-carrying parts are securely covered. During operation, all covers must remain closed.

2.6.2 Programs, viruses and dangerous programs

The system is subject to potential danger each time data is exchanged or software is installed from a data medium (e.g. diskette, CD-ROM, USB flash drive, etc.), a network connection, or the Internet. The user is responsible for assessing these dangers, implementing preventative measures such as virus protection programs, firewalls, etc. and obtaining software from reliable sources.

3. Organization of safety notices

The safety notices in this manual are organized as follows:

Safety notice	Description
Danger!	Disregarding the safety regulations and guidelines can be life-threatening.
Caution!	Disregarding the safety regulations and guidelines can result in severe injury or major damage to material.
Warning!	Disregarding the safety regulations and guidelines can result in injury or damage to material.
Information:	Important information for preventing errors.

Table 2: Organization of safety notices

4. Guidelines



European dimension standards apply to all dimensions (e.g. dimension diagrams, etc.).

5. Model numbers

5.1 Display units

Model number	Short description	Note
5AP820.1505-00	TFT C ¹⁾ XGA 15" T ²⁾ Automation Panel AP820; 15" XGA color TFT display with touch screen (resistive); painted housing; connection for Smart Display Link; IP 65 protection ³⁾ . 24 VDC.	See page 33
5AP880.1505-00	TFT C ¹⁾ XGA 15" FT ⁴⁾ Automation Panel AP880; 15" XGA color TFT display with touch screen (resistive); 40 function keys; painted housing; connection for Smart Display Link; IP 65 protection ³⁾ 24 VDC.	See page 37

Table 3: Model number overview - display units

- 1) C ... Color
- 2) T ... Touch screen
- 3) Assembled
- 4) FT ... function keys and touch screen

5.2 Extension units

Model number	Short description	Note
5AC800.COV1-00	Extension cover Cover for an unused extension slot on an AP800 display unit; IP65 ¹⁾ protection; painted.	See page 76
5AC800.COV2-00	USB extension cover Cover for an unused extension slot on an AP800 display unit with additional USB interface; IP65 ¹⁾ protection; painted.	See page 78
5AC800.CON1-00	Extension connector Straight connector; for connecting keyboard attachments to the Automation Panel 800; IP65 ¹⁾ protection; painted.	See page 80
5AC800.CON2-00	60° extension connector 60° angled connector; for connecting keyboard attachments to the Automation Panel 800; IP65 ¹⁾ protection; painted.	See page 82
5AC800.EXT1-00	Keyboard extension Keyboard extension for the Automation Panel 800; USB interface; IP65 ¹⁾ protection, painted housing.	See page 44
5AC800.EXT2-00	F ²⁾ key extension left Keyboard attachment for the left side of the Automation Panel 800; 20 function keys with LEDs and 20 system keys; IP65 ¹⁾ protection; painted housing.	See page 48
5AC800.EXT2-01	F ²⁾ key extension right Keyboard attachment for the right side of the Automation Panel 800; 20 function keys with LEDs and 20 system keys; IP65 ¹⁾ protection; painted housing.	See page 51
5AC800.EXT3-00	C ³⁾ key extension 8PB ⁴⁾ left Keyboard attachment for the left side of the Automation Panel 800; 16 function keys with LEDs and 8 illuminated ring keys; IP65 ¹⁾ protection; painted housing.	See page 54
5AC800.EXT3-01	C ³⁾ key extension 8PB ⁴⁾ right Keyboard attachment for the right side of the Automation Panel 800; 16 function keys with LEDs and 8 illuminated ring keys; IP65 ¹⁾ protection; painted housing.	See page 57
	LEDS and o manimated ring keys, it os - protection, painted nousing.	

Table 4: Model number overview - extensions and accessories

General information • Model numbers

Model number	Short description	Note
5AC800.EXT3-02	C ³⁾ key extension 12PB ⁴⁾ ES ⁵⁾ left Keyboard attachment for the left side of the Automation Panel 800; 4 function keys with LEDs and 12 illuminated ring keys; E-stop; key switch; IP65 ¹⁾ protection; painted housing.	See page 60
5AC800.EXT3-03	C ³⁾ key extension 12PB ⁴⁾ ES ⁵⁾ right Keyboard attachment for the right side of the Automation Panel 800; 4 function keys with LEDs and 12 illuminated ring keys; E-stop; key switch; IP65 ¹⁾ protection; painted housing.	See page 64
5AC800.EXT3-04	C ³⁾ key extension 8PB ⁴⁾ ES ⁵⁾ left Keyboard attachment for the left side of the Automation Panel 800; 12 function keys with LEDs and 8 illuminated ring keys; E-stop; key switch; IP65 ¹⁾ protection; painted housing.	See page 68
5AC800.EXT3-05	C³) key extension 8PB⁴) ES⁵) right Keyboard attachment for the right side of the Automation Panel 800; 12 function keys with LEDs and 8 illuminated ring keys; E-stop; key switch; IP65¹) protection; painted housing.	See page 72
5AC800.FLG1-00	Extension flange Flange for Automation Panel 800 and standard swing arm systems (e.g. Rittal CP-S); painted housing.	See page 84

Table 4: Model number overview - extensions and accessories (cont.)

1) Assembled

2) F ... Function keys

3) C ... Illuminated ring keys

4) PB ... Push button

5) ES ... Emergency stop

5.3 Cable

Model number	Short description	Note
5CASDL.0018-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 1.8 meters	See page 87 / 91
5CASDL.0050-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 5 meters	See page 87 / 91
5CASDL.0100-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 10 meters	See page 87 / 91
5CASDL.0150-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 15 meters	See page 87 / 91
5CASDL.0200-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 20 meters	See page 87 / 91
5CASDL.0250-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 25 meters	See page 87 / 91
5CASDL.0300-30	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 30 meters with extender	See page 89 / 94
5CASDL.0400-30	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 40 meters with extender	See page 89 / 94
5CAPWR.0018-20	Voltage supply cable for Automation Panel 800; length 1.8 meters.	See page 97
5CAPWR.0050-20	Voltage supply cable for Automation Panel 800; length 5 meters.	See page 97
5CAPWR.0100-20	Voltage supply cable for Automation Panel 800; length 10 meters.	See page 97
5CAPWR.0150-20	Voltage supply cable for Automation Panel 800; length 15 meters.	See page 97
5CAPWR.0200-20	Voltage supply cable for Automation Panel 800; length 20 meters.	See page 97
5CAPWR.0250-20	Voltage supply cable for Automation Panel 800; length 25 meters.	See page 97
5CAPWR.0300-20	Voltage supply cable for Automation Panel 800; length 30 meters.	See page 97
5CAPWR.0400-20	Voltage supply cable for Automation Panel 800; length 40 meters.	See page 97

Table 5: Model number overview - Cables

General information • Model numbers

Model number	Short description	Note
5CAX2X.0018-20	X2X cable for Automation Panel 800; length 1.8 meters.	See page 99
5CAX2X.0050-20	X2X cable for Automation Panel 800; length 5 meters.	See page 99
5CAX2X.0100-20	X2X cable for Automation Panel 800; length 10 meters.	See page 99
5CAX2X.0150-20	X2X cable for Automation Panel 800; length 15 meters.	See page 99
5CAX2X.0200-20	X2X cable for Automation Panel 800; length 20 meters.	See page 99
5CAX2X.0250-20	X2X cable for Automation Panel 800; length 25 meters.	See page 99
5CAX2X.0300-20	X2X cable for Automation Panel 800; length 30 meters.	See page 99
5CAX2X.0400-20	X2X cable for Automation Panel 800; length 40 meters.	See page 99

Table 5: Model number overview - Cables (cont.)

5.4 Accessories

5.4.1 USB flash drives

Model number	Short description	Note
5MMUSB.0128-00	USB flash drive 128 MB SanDisk USB 2.0 flash drive 128 MB	Cancelled since 03/2005 Replaced by 5MMUSB.0512-00
5MMUSB.0256-00	USB flash drive 256 MB SanDisk USB 2.0 flash drive 256 MB	Cancelled since 12/2007 Replaced by 5MMUSB.0512-00
5MMUSB.0512-00	USB flash drive 512 MB SanDisk USB 2.0 flash drive 512 MB	See page 154
5MMUSB.1024-00	USB flash drive 1 GB SanDisk USB 2.0 flash drive 1 GB	Cancelled since 03/2007 Replaced by 5MMUSB.2048-00
5MMUSB.2048-00	USB flash drive 2 GB SanDisk USB 2.0 flash drive 2 GB	See page 154

Table 6: Model number overview - USB flash drives

5.4.2 Legend strip templates

Model number	Short description	Note
5AC800.EXTX-00	Legend strip template for AP800 extension for 5AC800.EXT2-00, 5AC800.EXT2-01, for 3 devices.	See page 159
5AC800.EXTX-01	Legend strip template for AP800 extension 1 for 5AC800.EXT3-00, 5AC800.EXT3-01, for 2 devices.	See page 159
5AC800.EXTX-02	Legend strip template for AP800 extension 2 for 5AC800.EXT3-04, 5AC800.EXT3-05, for 1 device right and device left.	See page 159

Table 7: Model number overview - legend strip templates

General information • Model numbers

Model number	Short description	Note
5AC800.EXTX-03	Legend strip template for AP800 extension 3 for 5AC800.EXT3-02, 5AC800.EXT3-03, for 3 devices.	See page 159
5AC800.150x-00	Legend strip template for AP800 display for 5AP880.1505-00, for 3 devices.	See page 159

Table 7: Model number overview - legend strip templates

5.4.3 Miscellaneous

Model number	Short description	Note
5SWHMI.0000-00	HMI Drivers & Utilities DVD Contains drivers, utilities, software upgrades and user's manuals for B&R panel system products (see B&R homepage – Industrial PCs, Visualization and Operation).	See page 135

Table 8: Model numbers - other items

Chapter 2 • Technical data

1. General information

Automation Panel 800 (AP800) devices are fully closed display units. When installed on a swing arm system, the operator panel can be placed in the most ergonomic position.

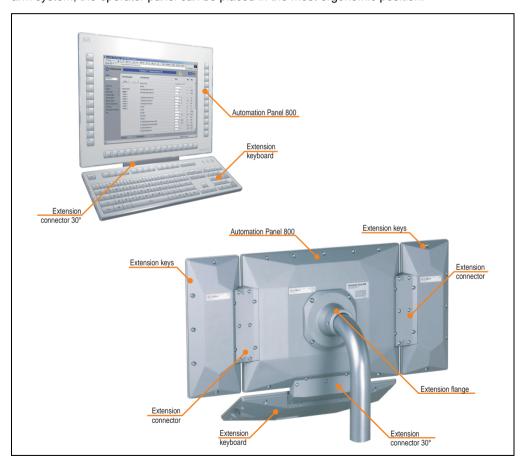


Figure 1: Component overview - Automation Panel 800 with extension units

Technical data • General information

1.1 Features

- · Fully closed system
- Touch screen
- · Industrial high-density plug
- USB interface ¹⁾
- · Expandable using extension units
- E-stop¹⁾
- Key Switch ¹⁾
- Illuminated ring keys¹⁾
- SDL (Smart Display Link) transfer technology up to 40 meters
- Function keys are easily configured using the B&R Key Editor²⁾

¹⁾ Depends on the device configuration.

²⁾ Can be downloaded from the B&R homepage (www.br-automation.com).

1.2 System components / Configuration

The AP800 system can be assembled to meet individual requirements and operational conditions.

1.2.1 Selection guide - basic system

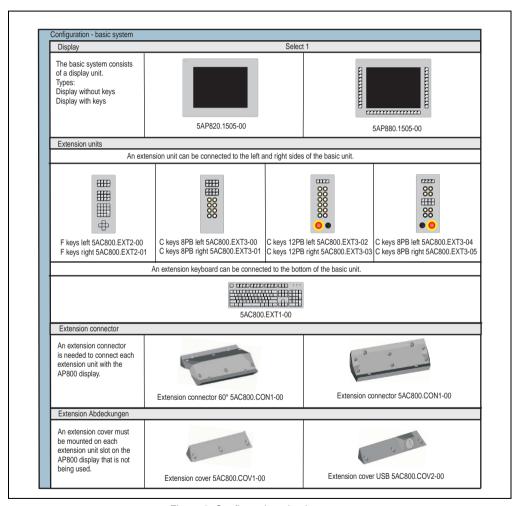


Figure 2: Configuration - basic system

Explanation:

- 1) Select the basic system (select 1).
- Select the extension units according to requirements.

Technical data • General information

- Make selection depending on the number of extension units, extension connectors and extension covers.
- 4) Select optional components.

1.2.2 Selection guide - optional components

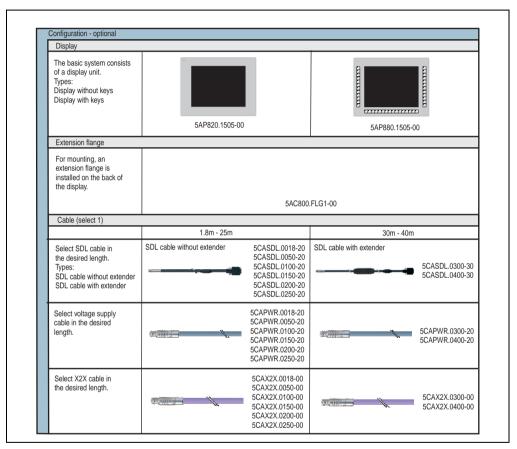


Figure 3: Selection guide - optional components

Information:

The optional components are required for installation and commissioning.

2. Configuration

The following 3 examples should be helpful for the configuration of AP800 systems. They will explain which components are required for the respective configuration.

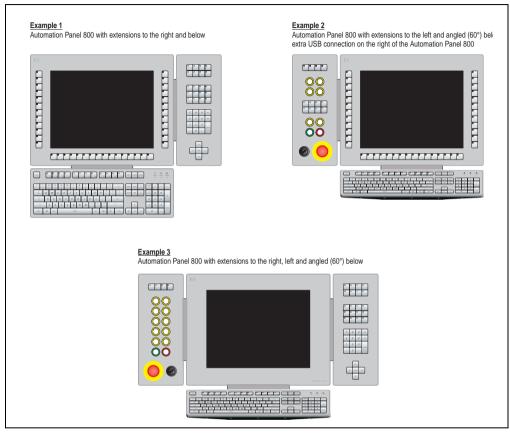


Figure 4: Example configurations

Technical data • Configuration

This page is only used as a place holder.

2.1 Example 1

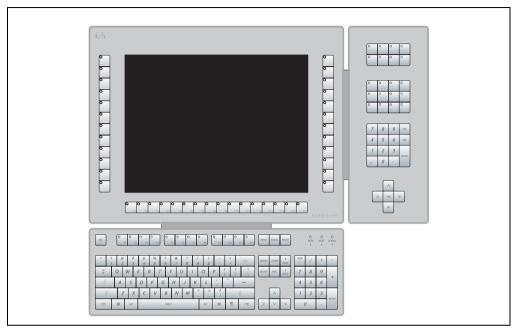


Figure 5: Configuration - Example 1

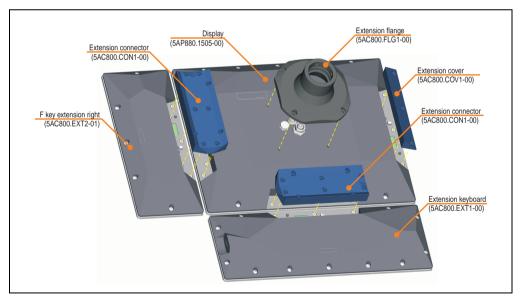


Figure 6: Required components - Example 1

Technical data • Configuration

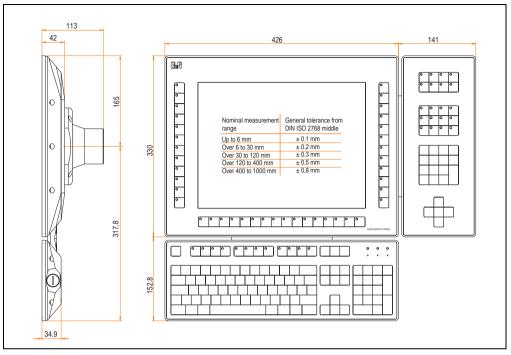


Figure 7: Dimensions - Example 1

2.1.1 Overview of the required components

Model number	Short description	Amount
5AP880.1505-00	TFT C XGA 15" FT	1
5AC800.EXT1-00	Keyboard extension	1
5AC800.EXT2-01	F key extension right	1
5AC800.CON1-00	Extension connector	2
5AC800.COV1-00	Extension cover	1
5AC800.FLG1-00	Extension flange	1
5CASDL.0xxx-20	SDL cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAPWR.0xxx-20	Voltage supply cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAX2X.0xxx-20	X2X cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1

Table 9: Overview of the required components - Example 1

2.2 Example 2

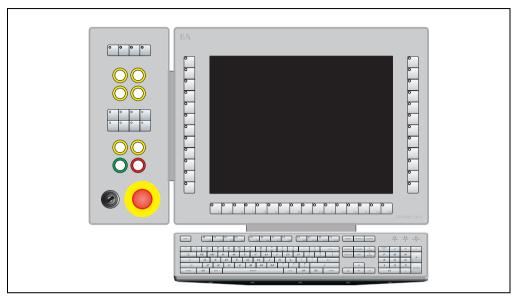


Figure 8: Configuration - Example 2

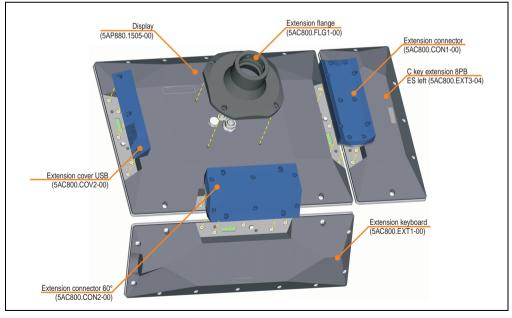


Figure 9: Required components - Example 2

Technical data • Configuration

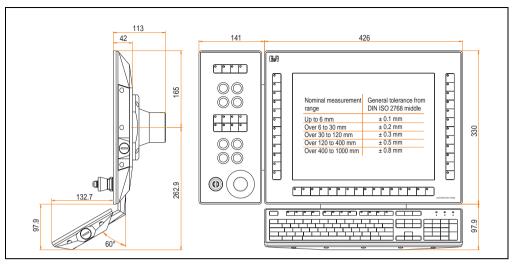


Figure 10: Dimensions - Example 2

2.2.1 Overview of the required components

Model number	Short description	Amount
5AP880.1505-00	TFT C XGA 15" FT	1
5AC800.EXT1-00	Keyboard extension	1
5AC800.EXT3-04	C key extension 8PB ES left	1
5AC800.CON1-00	Extension connector	1
5AC800.CON2-00	60° extension connector	1
5AC800.COV2-00	USB extension cover	1
5AC800.FLG1-00	Extension flange	1
5CASDL.0xxx-20	SDL cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAPWR.0xxx-20	Voltage supply cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAX2X.0xxx-20	X2X cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1

Table 10: Overview of the required components - Example 2

2.3 Example 3

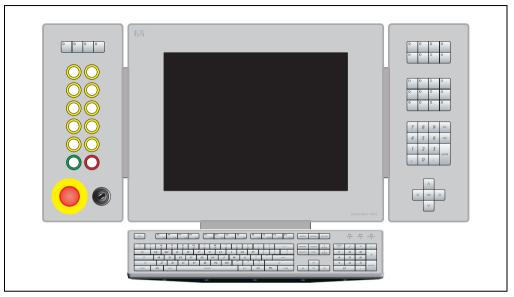


Figure 11: Configuration - Example 3

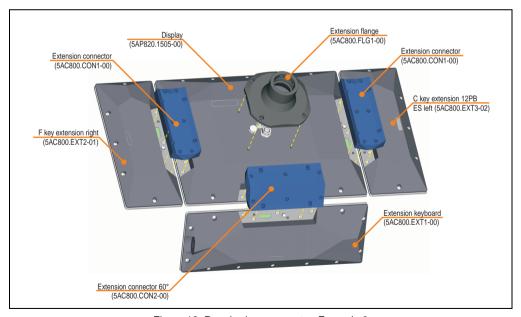


Figure 12: Required components - Example 3

Technical data • Configuration

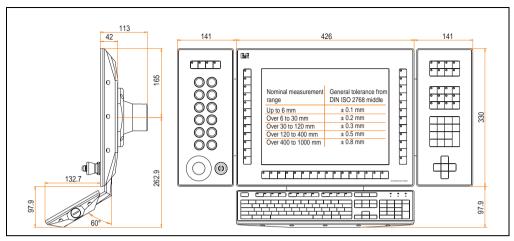


Figure 13: Dimensions - Example 3

2.3.1 Overview of the required components

Model number	Short description	Amount
5AP820.1505-00	TFT C XGA 15" T	1
5AC800.EXT2-01	F key extension right	1
5AC800.EXT3-02	C key extension 12PB ES left	1
5AC800.EXT1-00	Keyboard extension	1
5AC800.CON1-00	Extension connector	2
5AC800.CON2-00	60° extension connector	1
5AC800.FLG1-00	Extension flange	1
5CASDL.0xxx-20	SDL cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAPWR.0xxx-20	Voltage supply cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1
5CAX2X.0xxx-20	X2X cable for Automation Panel 800 - length can be selected from 1.8 to 40 meters - see table 5 "Model number overview - Cables" on page 18.	1

Table 11: Overview of the required components - Example 3

3. Individual components

3.1 Display units

3.1.1 5AP820.1505-00

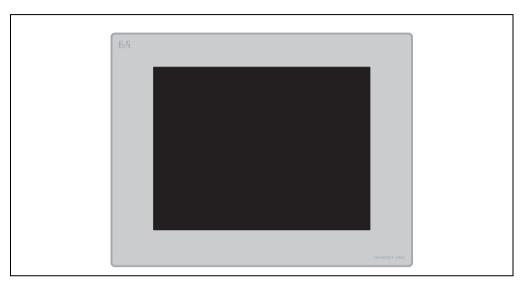


Figure 14: Front view - 5AP820.1505-00

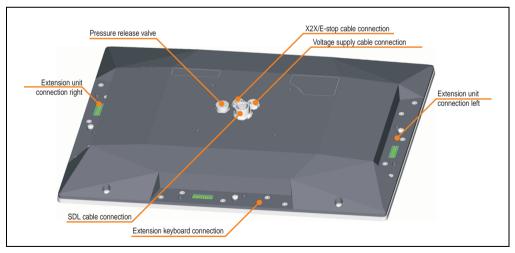


Figure 15: Rear view - 5AP820.1505-00

Technical data • Individual components

Technical data

Features	5AP820.1505-00
Display Type Diagonal Colors Resolution Contrast Perspective (see page 172) Horizontal Vertical Background lighting Brightness Half-brightness time	TFT colors 38.10 cm (381 mm) 16 million colors XGA, 1024 x 768 pixels 400:1 Direction a / direction b = 85° Direction c / direction d = 85° 250 cd/m² 50,000 hours
Touch screen ¹⁾ Technology Controller Degree of transmission	Analog, resistive Elo, serial, 12- bit 78 %
Keys/LED Function keys Soft keys Cursor keys Number block Other keys Key lifespan LED brightness	-
Connections made using separate cables SDL ²⁾ Supply voltage X2X	Pin assignments see page 42 Pin assignments see page 43 Pin assignments see page 43
Electrical characteristics	
Power supply Rated voltage Rated current Starting current Power consumption	24 VDC ±25% 3.2 A 5 A typical, maximal 30 A for < 300 μs 27 W typical, maximal 35 W
X2X supply bus Power consumption	Only power supplies provided by B&R are to be used. Maximum 3 W
Mechanical characteristics	
Front Frame Design Membrane Light background	Aluminum, naturally anodized ³⁾ Gray Polyester Similar to Pantone 427CV ³⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ³⁾ (semi-matt)

Table 12: Technical data - 5AP820.1505-00

Technical data • Individual components

Mechanical characteristics	5AP820.1505-00
Outer dimensions Width Height Depth (without flange)	426 mm 330 mm 41.3 mm
Weight	Approx. 5 kg
Environmental characteristics	
Ambient temperature Operation Mounting orientation 0°4) Mounting orientation up to -45°4) Mounting orientation up to +45°4) Storage Transport	0 +50 °C 0 +50 °C 0 +45 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	$T \le 40 ^{\circ}\text{C}$: 5 % to 90 %, non-condensing $T > 40 ^{\circ}\text{C}$: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1,75 mm amplitude / 9 - 150 Hz: 0,5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 12: Technical data - 5AP820.1505-00 (cont.)

- 1) The necessary drivers can be downloaded from the download area on the B&R homepage (www.br-automation.com).
- 2) SDL ... Smart Display Link
- 3) Depending on the process or batch, there may be visible deviations in the color and surface structure.
- 4) Specified mounting orientation see chapter 3 "Commissioning", section 3.2 "Mounting orientation" on page 109.

Technical data • Individual components

Temperature humidity diagram - operation and storage

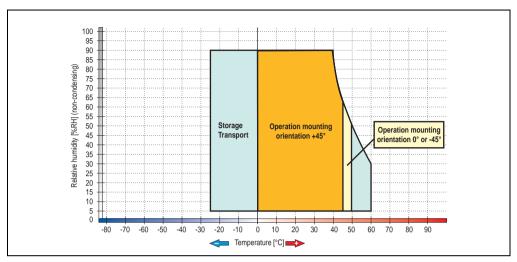


Figure 16: Temperature humidity diagram - 5AP820.1505-00

Dimensions

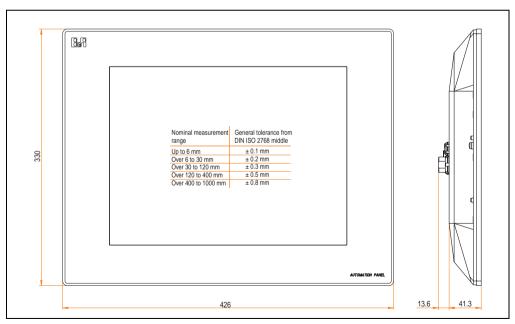


Figure 17: Dimensions - 5AP820.1505-00

3.1.2 5AP880.1505-00

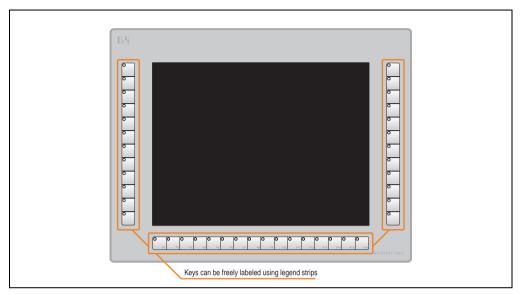


Figure 18: Front view - 5AP880.1505-00

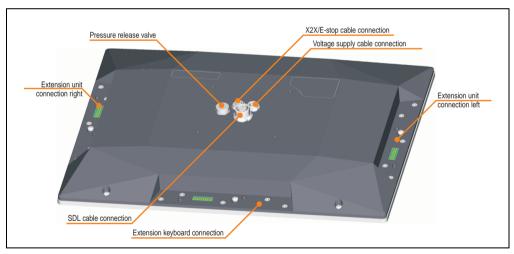


Figure 19: Rear view - 5AP880.1505-00

Features	5AP880.1505-00
Display Type Diagonal Colors Resolution Contrast Perspective (see page 172) Horizontal Vertical Background lighting Brightness Half-brightness time	TFT colors 38.10 cm (381 mm) 16 million colors XGA, 1024 x 768 pixels 400:1 Direction a / direction b = 85° Direction c / direction d = 85° 250 cd/m² 50,000 hours
Touch screen ¹⁾ Technology Controller Degree of transmission	Analog, resistive Elo, serial, 12- bit 78 %
Keys/LED ²⁾ Function keys Operated using Soft keys Cursor keys Number block Other keys Key lifespan LED brightness	40 with LED (yellow) PC > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd (yellow)
Connections made using separate cables SDL ³⁾ Supply voltage X2X	Pin assignments see page 42 Pin assignments see page 43 Pin assignments see page 43
Electrical characteristics	
Power supply Rated voltage Rated current Starting current Power consumption	24 VDC ±25% 3.2 A 5 A typical, maximal 30 A for < 300 μs 27 W typical, maximal 36 W
X2X supply bus Power consumption	Only power supplies provided by B&R are to be used. Maximum 3 W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ⁴⁾ Gray ⁴⁾ Polyester Similar to Pantone 427CV ⁴⁾ Similar to Pantone 429CV ⁴⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ⁴⁾ (semi-matt)

Table 13: Technical data - 5AP880.1505-00

Mechanical characteristics	5AP880.1505-00
Outer dimensions Width Height Depth (without flange)	426 mm 330 mm 41.3 mm
Weight	Approx. 5 kg
Environmental characteristics	
Ambient temperature Operation Mounting orientation 0°5) Mounting orientation up to -45°5) Mounting orientation up to +45°5) Storage Transport	0 +50 °C 0 +50 °C 0 +45 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	$T \le 40 ^{\circ}\text{C}$: 5 % to 90 %, non-condensing $T > 40 ^{\circ}\text{C}$: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 13: Technical data - 5AP880.1505-00 (cont.)

- 1) The necessary drivers can be downloaded from the download area on the B&R homepage (www.br-automation.com).
- 2) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 3) SDL ... Smart Display Link
- 4) Depending on the process or batch, there may be visible deviations in the color and surface structure.
- 5) Specified mounting orientation see chapter 3 "Commissioning", section 3.2 "Mounting orientation" on page 109.

Temperature humidity diagram - operation and storage

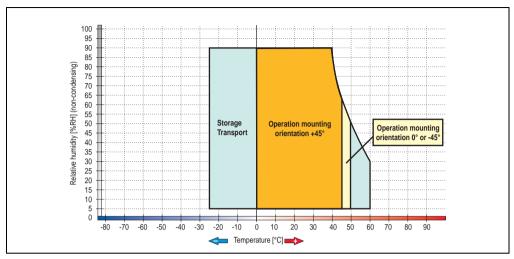


Figure 20: Temperature humidity diagram - 5AP880.1505-00

Dimensions

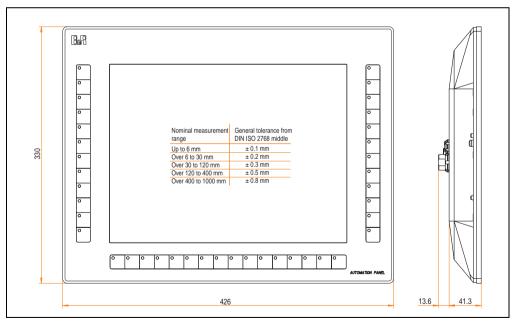


Figure 21: Dimensions - 5AP880.1505-00

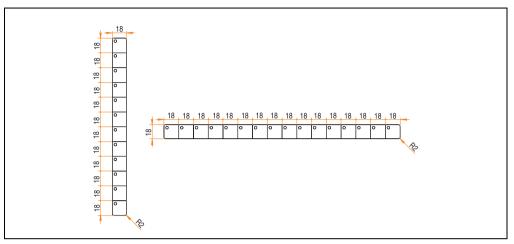


Figure 22: Key dimensions - 5AP880.1505-00

3.1.3 Pin assignments

Information:

The following information is valid for both display units (5AP820.1505-00, 5AP880.1505-00).

SDL cable connection

Caution!

SDL cables can only be plugged in and unplugged when the APC620 or PPC700 and display device (Automation Panel 800) are turned off.

	Pin assignments - SDL cable conn		
	ODU Min	isnap 24-pi	n
Pin	Assignment	Pin	Assignment
1	XUSB1-	16	T.M.D.S. data 0+
2	XUSB0-	17	T.M.D.S. DATA 1/XUBS0 shield
3	n.c.	18	DDC Clock T.M.D.S. DATA 1-
4	T.M.D.S. clock shield	19	DDC Data T.M.D.S. DATA 1+
5	XUSB1+	20	Ground (return for + 5V, HSync and VSync)
6	+ 5 V Power 1)	21	T.M.D.S. data 2-
7	XUSB0+	22	T.M.D.S. data 2+
8	Hot Plug detect	23	T.M.D.S. data 2/SDL shield
9	DDC clock	24	SDL-
10	DDC data		
11	SDL+		
12	T.M.D.S. clock -		
13	T.M.D.S. clock +		
14	T.M.D.S. DATA 0/XUSB1 shield		
15	T.M.D.S. data 0-		

Table 14: Pin assignments - SDL cable connection

¹⁾ Protected internally by a multifuse

Supply voltage

	Pin assignments - supply voltage			
	ODU Minisnap 3-pin			
	Electrically isolated	1		
Pin	Assignment			
1	+			
2	-	2 3		
3	Functional grounding			

Table 15: Pin assignments - SDL cable connection

X2X / E-stop cable connection

	Pin assignments - X2X / E-stop cable connection		
	ODU Minisnap 10-pin		
	Electrically isolated		
Pin	Assignment		
1	E-stop normally closed contact 1 (12)	9 0	
2	E-stop normally closed contact 2 (22)	2	
3	X2X_+24V (bus supply +)	7	
4	E-stop normally closed contact 1 (11)	3	
5	E-stop normally closed contact 2 (21)	10 5	
6	X2X_0V (bus supply -)		
7	n. c.		
8	n. c.		
9	X2X\ (IN)		
10	X2X (IN)		

Table 16: Pin assignments - X2X / E-stop cable connection

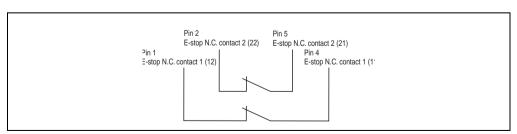


Figure 23: E-stop circuit connections

3.2 Extension units

3.2.1 Extension keyboard 5AC800.EXT1-00



Figure 24: Front view - 5AC800.EXT1-00

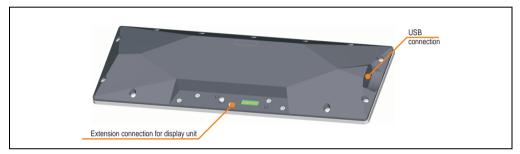


Figure 25: Rear view - 5AC800.EXT1-00

Features	5AC800.EXT1-00
Keys/LED ¹⁾ Cursor keys Number block Other keys Other LED Operated using Key lifespan LED brightness	Total of 104 keys / 15 LEDs 4 without LED 17 without LED 83 (12 with LED - yellow) 3 green PC > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd (yellow) and 35 mcd (green)
USB interface Type Amount Transfer rate Connection Current load	USB 1.1 1 (left) Low speed (1.5 MBit/s), full speed (12 MBit/s) Type A Max. 500 mA
Electrical characteristics	
Power consumption	Max. 4W
Mechanical characteristics	
Front Frame Design Membrane Light background Color (color gradients)	Aluminum, naturally anodized ²⁾ Gray ⁴⁾ Polyester Similar to Pantone 427CV ⁴⁾ Similar to Pantone white ⁴⁾ to Pantone 429CV ⁴⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ⁴⁾ (semi-matt)
Outer dimensions Width Height Depth	426 mm 146.8 mm 34.9 mm
Weight	Approx. 1.6 kg
Connection	Required for installation below an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)

Table 17: Technical data 5AC800.EXT1-00

Environmental characteristics	5AC800.EXT1-00
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 17: Technical data 5AC800.EXT1-00

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

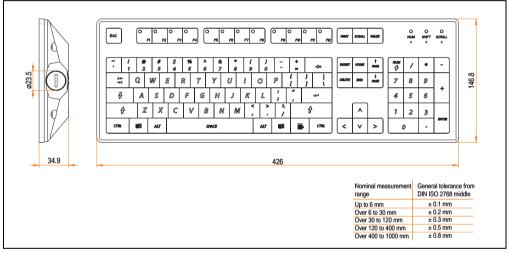


Figure 26: Dimensions - 5AC800.EXT1-00

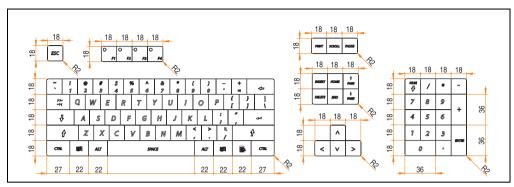


Figure 27: Key dimensions - 5AC800.EXT1-00

3.2.2 F key extension left 5AC800.EXT2-00

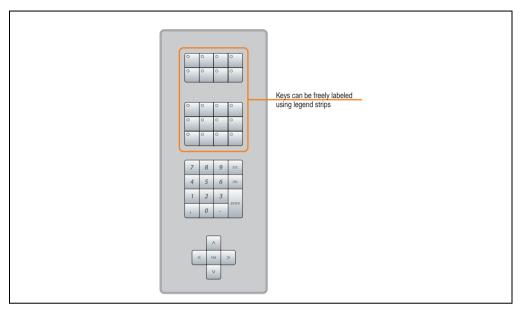


Figure 28: Front view - 5AC800.EXT2-00

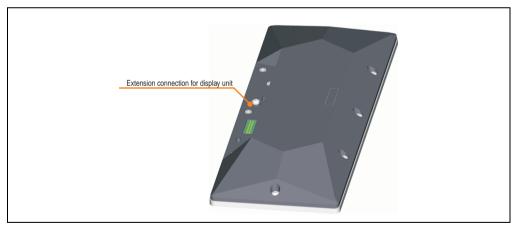


Figure 29: Rear view - 5AC800.EXT2-00

Features	5AC800.EXT2-00
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Key lifespan LED brightness	20 with LED (yellow) PC 4 without LED 15 without LED $\frac{1}{15}$ without LED $\frac{1}{15}$ without LED $\frac{1}{15}$ > 1,000,000 actuations with 1 \pm 0.3 to 3 \pm 0.3 N operating force Typ. 60 mcd (yellow)
Electrical characteristics	
Power consumption	Max. 1W
Mechanical characteristics	
Front Frame Design Membrane Light background Color (color gradients) Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ⁴⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the left of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= $40 ^{\circ}$ C: 5 % to 90 %, non-condensing T > $40 ^{\circ}$ C: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s 2 0-peak) and 11 ms duration Max. 50 g (490 m/s 2 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)

Table 18: Technical data 5AC800.EXT2-00

Environmental characteristics	5AC800.EXT2-00
Altitude	Max. 3,000 m

Table 18: Technical data 5AC800.EXT2-00

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

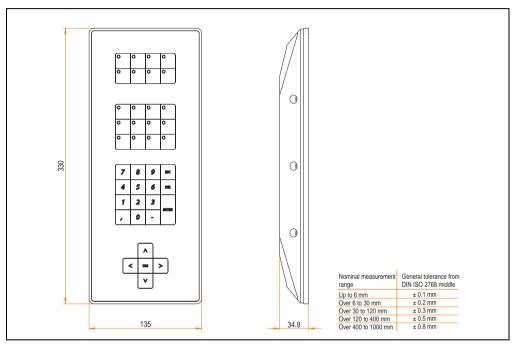


Figure 30: Dimensions - 5AC800.EXT2-00

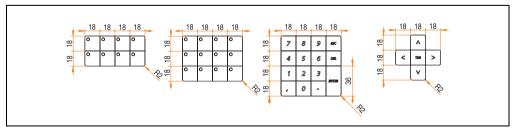


Figure 31: Key dimensions - 5AV800.EXT2-00

3.2.3 F key extension right 5AC800.EXT2-01

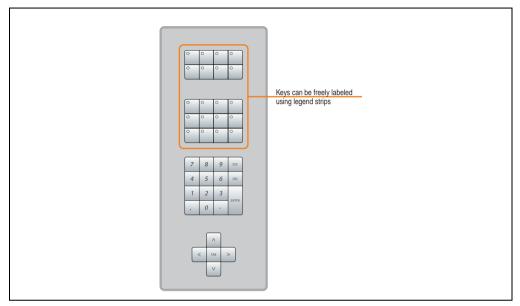


Figure 32: Front view - 5AC800.EXT2-01

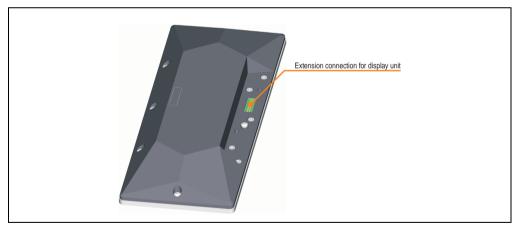


Figure 33: Rear view - 5AC800.EXT2-01

Features	5AC800.EXT2-01
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Key lifespan LED brightness	20 with LED (yellow) PC 4 without LED 15 without LED > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd (yellow)
Power consumption	Max. 1W
Mechanical characteristics	THUA. 111
Front Frame Design Membrane Light background Color (color gradients) Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the right of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)

Table 19: Technical data 5AC800.EXT2-01

Environmental characteristics	5AC800.EXT2-01
Altitude	Max. 3000 m

Table 19: Technical data 5AC800.EXT2-01

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

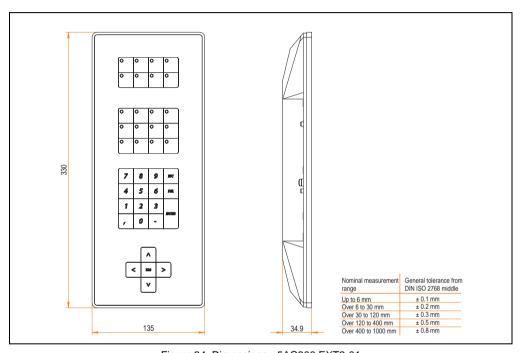


Figure 34: Dimensions - 5AC800.EXT2-01

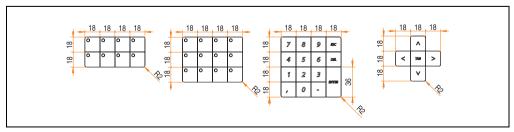


Figure 35: Key dimensions - 5AC800.EXT2-01

3.2.4 C key extension 8PB left 5AC800.EXT3-00

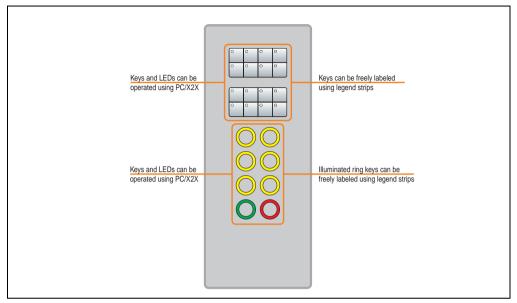


Figure 36: Front view - 5AC800.EXT3-00



Figure 37: Rear view - 5AC800.EXT3-00

Features	5AC800.EXT3-00
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green Red	16 with LED (yellow) PC, X2X T 8 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd Typ. 54 mcd
Electrical characteristics	
Power consumption	Max. 7W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the left of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)

Table 20: Technical data - 5AC800.EXT3-00

Environmental characteristics	5AC800.EXT3-00
Shock Operation Storage / Transport	Max. 15 g (147 m/s² 0-peak) and 11 ms duration Max. 50 g (490 m/s² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 20: Technical data - 5AC800.EXT3-00

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

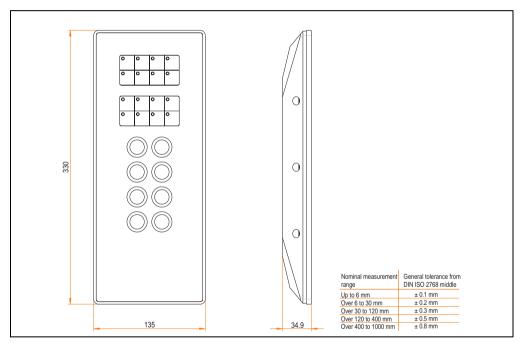


Figure 38: Dimensions - 5AC800.EXT3-00




Figure 39: Key dimensions - 5AC800.EXT3-00

3.2.5 C key extension 8PB right 5AC800.EXT3-01

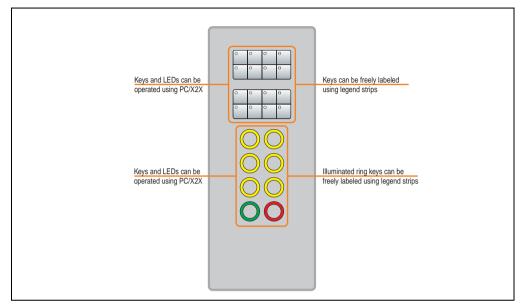


Figure 40: Front view - 5AC800.EXT3-01

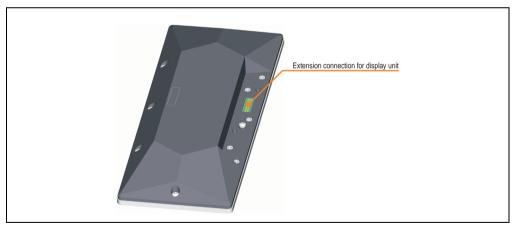


Figure 41: Rear view - 5AC800.EXT3-01

Features	5AC800.EXT3-01
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green Red	16 with LED (yellow) PC, X2X T 8 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd Typ. 54 mcd
Electrical characteristics	
Power consumption	Max. 7W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyster Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the right of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)

Table 21: Technical data 5AC800.EXT3-01

Environmental characteristics	5AC800.EXT3-01
Shock Operation Storage / Transport	Max. 15 g (147 m/s² 0-peak) and 11 ms duration Max. 50 g (490 m/s² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 21: Technical data 5AC800.EXT3-01

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

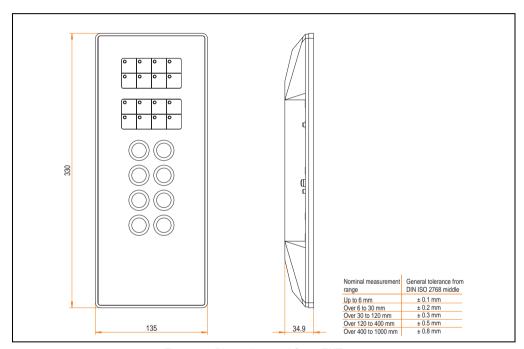


Figure 42: Dimensions - 5AC800.EXT3-01




Figure 43: Key dimensions - 5AC.EXT3-01

3.2.6 C key extension 12PB ES left 5AC800.EXT3-02

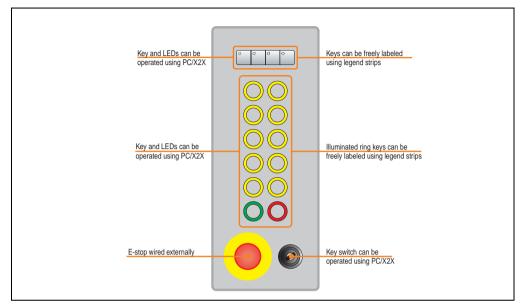


Figure 44: Front view - 5AC800.EXT3-02

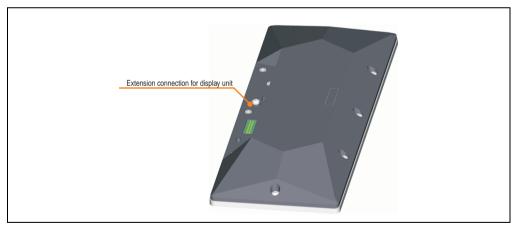


Figure 45: Rear view - 5AC800.EXT3-02

Features	5AC800.EXT3-02
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green Red	4 with LED (yellow) PC, X2X - 12 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd Typ. 54 mcd
E-stop	also see Appendix A, section 1 "E-stop button" on page 165 2 N.C. contacts, left position
Key switch	also see Appendix A, section 2 "Key switch" on page 167 1 N.O. contact, right position
Electrical characteristics	
Power consumption	Max. 8W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the left of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing

Table 22: Technical data - 5AC800.EXT3-02

Environmental characteristics	5AC800.EXT3-02
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s 2 0-peak) and 11 ms duration Max. 50 g (490 m/s 2 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 22: Technical data - 5AC800.EXT3-02

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

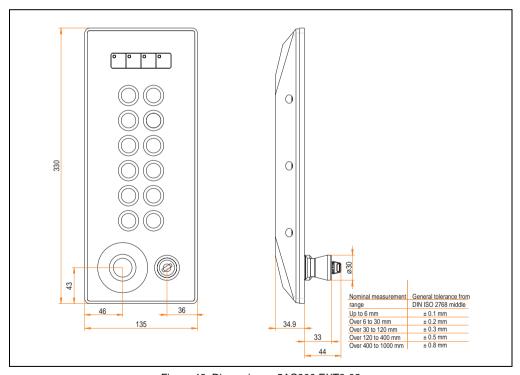


Figure 46: Dimensions - 5AC800.EXT3-02




Figure 47: Key dimensions - 5AC800.EXT3-02

3.2.7 C key extension 12PB ES right 5AC800.EXT3-03

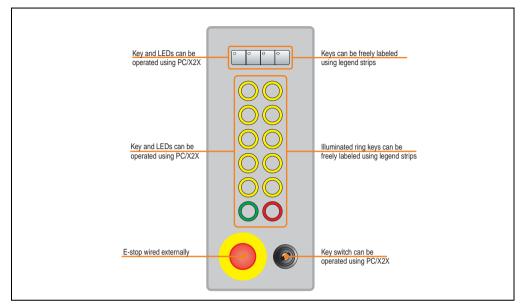


Figure 48: Front view - 5AC800.EXT3-03

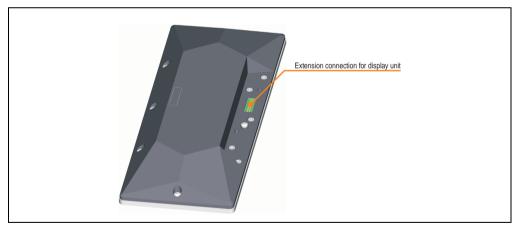


Figure 49: Rear view - 5AC800.EXT3-03

Features	5AC800.EXT3-03
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green Red	4 with LED (yellow) PC, X2X - 12 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd Typ. 54 mcd
E-stop	also see Appendix A, section 1 "E-stop button" on page 165 2 N.C. contacts, left position
Key switch	also see Appendix A, section 2 "Key switch" on page 167 1 N.O. contact, right position
Electrical characteristics	
Power consumption	Max. 8W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the right of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing

Table 23: Technical data - 5AC800.EXT3-03

Environmental characteristics	5AC800.EXT3-03
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 23: Technical data - 5AC800.EXT3-03

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

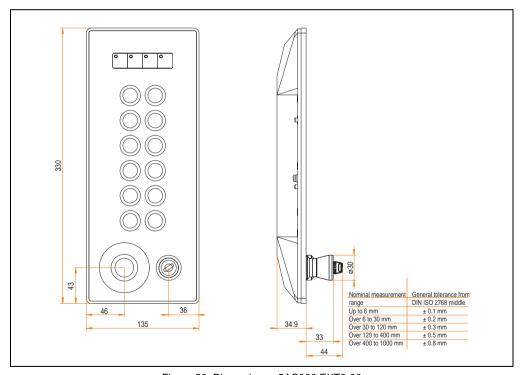


Figure 50: Dimensions - 5AC800.EXT3-03




Figure 51: Key dimensions - 5AC800.EXT3-03

3.2.8 C key extension 8PB ES left 5AC800.EXT3-04

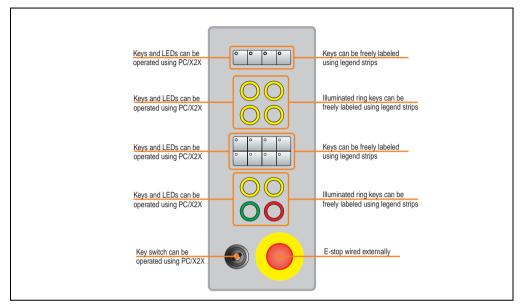


Figure 52: Front view - 5AC800.EXT3-04



Figure 53: Rear view - 5AC800.EXT3-04

Features	5AC800.EXT3-04
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green Red	12 with LED (yellow) PC, X2X - 8 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd Typ. 54 mcd
E-stop	also see Appendix A, section 1 "E-stop button" on page 165 2 N.C. contacts, right position
Key switch	also see Appendix A, section 2 "Key switch" on page 167 1 N.O. contact, left position
Electrical characteristics	
Power consumption	Max. 7W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the left of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing

Table 24: Technical data - 5AC800.EXT3-04

Environmental characteristics	5AC800.EXT3-04
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s² 0-peak) and 11 ms duration Max. 50 g (490 m/s² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 24: Technical data - 5AC800.EXT3-04

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

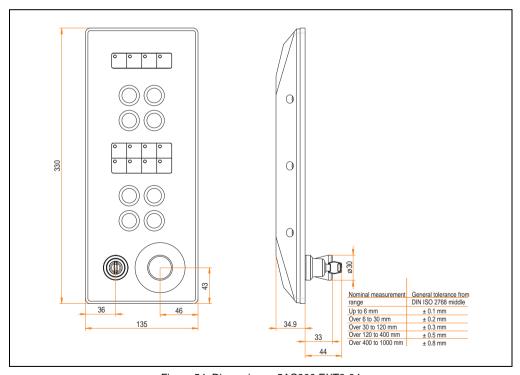


Figure 54: Dimensions - 5AC800.EXT3-04




Figure 55: Key dimensions - 5AC800.EXT3-04

3.2.9 C key extension 8PB ES right 5AC800.EXT3-05

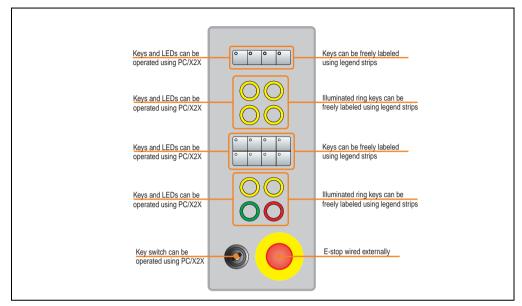


Figure 56: Front view - 5AC800.EXT3-05

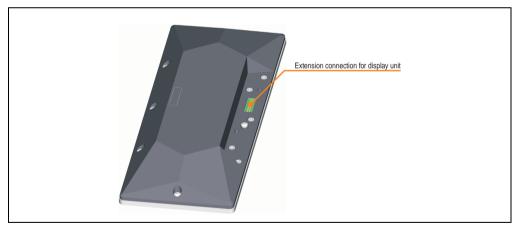


Figure 57: Rear view - 5AC800.EXT3-05

Features	5AC800.EXT3-05
Keys/LED ¹⁾ Function keys Operated using Cursor keys Number block Other keys Operated using Key lifespan Key lifespan LED brightness Yellow Green	12 with LED (yellow) PC, X2X - 8 illuminated ring keys (PB - Push Button) PC, X2X 1,000,000 actuations with 3.5 -0.5 to 3.5 +0.7 N operating force > 1,000,000 actuations with 1 ±0.3 to 3 ±0.3 N operating force Typ. 60 mcd Typ. 35 mcd
Red E-stop	Typ. 54 mcd also see Appendix A, section 1 "E-stop button" on page 165 2 N.C. contacts, right position
Key switch	also see Appendix A, section 2 "Key switch" on page 167 1 N.O. contact, left position
Electrical characteristics	
Power consumption	Max. 7W
Mechanical characteristics	
Front Frame Design Membrane Light background Color legend strips (color gradients)	Aluminum, naturally anodized ²⁾ Gray ²⁾ Polyester Similar to Pantone 427CV ²⁾ Similar to Pantone white to Pantone 429CV ²⁾
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ²⁾ (semi-matt)
Outer dimensions Width Height Depth	135 mm 330 mm 34.9 mm
Weight	Approx. 1.1 kg
Connection	Required for installation to the right of an Automation Panel 800 display
Environmental characteristics	
Ambient temperature Operation (0°, -45°, +45°) Storage Transport	0 +50 °C -25 +60 °C -25 +60 °C
Relative humidity Operation / Storage / Transport	T <= 40 °C: 5 % to 90 %, non-condensing T > 40 °C: < 90 %, non-condensing

Table 25: Technical data - 5AC800.EXT3-05

Environmental characteristics	5AC800.EXT3-05
Vibration Operation (continuous) Operation (occasional) Storage / Transport	5 - 9 Hz: 1.75 mm amplitude / 9 - 150 Hz: 0.5 g (4.9 m/s² 0-peak) 5 - 9 Hz: 3 mm amplitude / 9 - 150 Hz: 1 g (9.8 m/s² 0-peak) Max. 10 - 57 Hz and 0.075 mm amplitude Max. 58 - 500 Hz and 1 g (9.8 m/s² 0-peak)
Shock Operation Storage / Transport	Max. 15 g (147 m/s ² 0-peak) and 11 ms duration Max. 50 g (490 m/s ² 0-peak) and 11 ms duration
Protection type	IP65 / NEMA 250 type 4X, dust and sprayed water protection (from all sides)
Altitude	Max. 3,000 m

Table 25: Technical data - 5AC800.EXT3-05

- 1) The key and LED functions can be freely configured with the B&R Key Editor, which can be found in the download area of the B&R homepage (www.br-automation.com) or on the B&R HMI Driver & Utilities DVD (model number 5SWHMI.0000-00).
- 2) Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

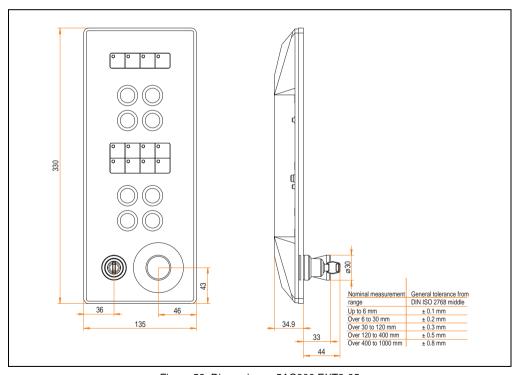


Figure 58: Dimensions - 5AC800.EXT3-05

Key dimensions




Figure 59: Key dimensions - EXT3-05

3.3 Extension connector / flange

3.3.1 Extension cover 5AC800.COV1-00

The cover must be mounted on each extension unit connection slot that is not being used on the AP800 display (see "Installation of components" on page 108).

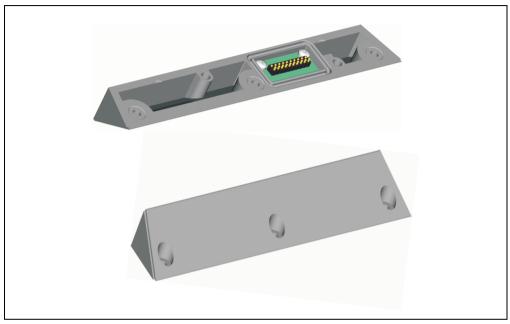


Figure 60: Extension cover 5AC800.COV1-00

Features	5AC800.COV1-00
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ¹⁾ (semi-matt)
Weight	Approx. 0.1 kg

Table 26: Technical data - 5AC800.COV1-00

¹⁾ Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

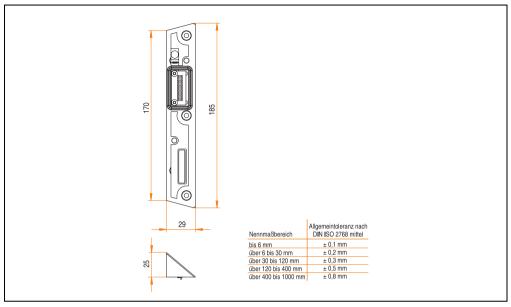


Figure 61: Dimensions - extension cover 5AC800.COV1-00

Contents of delivery

Amount	Component
1	Extension cover
3	Torx screws included

Table 27: Contents of delivery - extension cover 5AC800.COV1-00

3.3.2 USB extension cover 5AC800.COV2-00

The cover must be mounted on each extension unit connection slot that is not being used on the AP800 display (see "Installation of components" on page 108). With this design, a USB flash drive can be connected to the AP800 display.

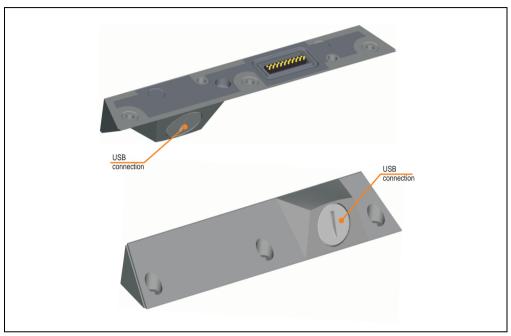


Figure 62: USB extension cover 5AC800.COV2-00

Features	5AC800.COV2-00
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ¹⁾ (semi-matt)
Weight	Approx. 0.1 kg

Table 28: Technical data - 5AC800.COV2-00

¹⁾ Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

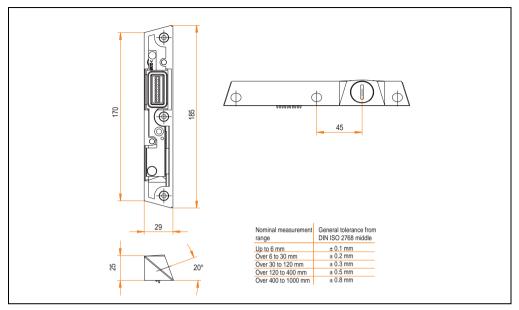


Figure 63: Dimensions - USB extension cover 5AC800.COV2-00

Contents of delivery

Amount	Component
1	USB extension cover
3	Torx screws included

Table 29: Contents of delivery - extension cover USB 5AC800.COV2-00

3.3.3 Extension connector 5AC800.CON1-00

This extension connector is required to connect AP800 displays and extension units (see "Installation of components" on page 108). Straight design.

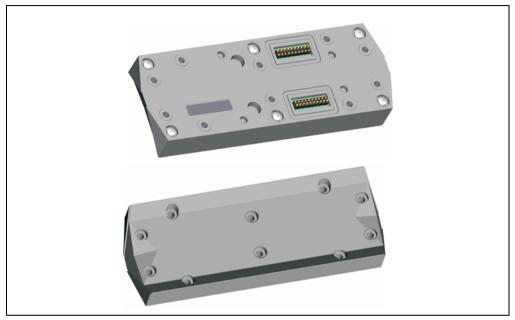


Figure 64: Extension connector 5AC800.CON1-00

Features	5AC800.CON1-00
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ¹⁾ (semi-matt)
Weight	Approx. 0.3 kg

Table 30: Technical data - 5AC800.CON1-00

¹⁾ Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

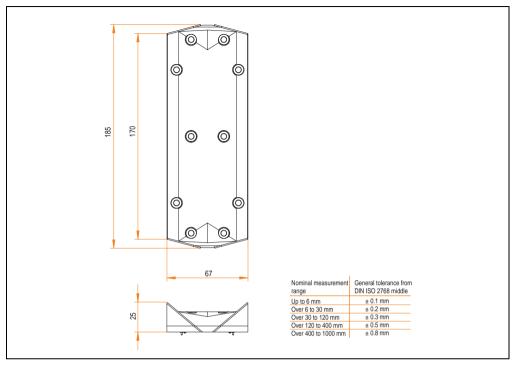


Figure 65: Dimensions - extension connector 5AC800.CON1-00

Contents of delivery

Amount	Component
1	Extension connector
10	Torx screws included

Table 31: Contents of delivery - extension connector 5AC800.CON1-00

3.3.4 Extension connector 60° 5AC800.CON2-00

This extension connector is required to connect AP800 displays and extension units (see "Installation of components" on page 108). 60° design.



Figure 66: Extension connector 60° 5AC800.CON2-00

Features	5AC800.CON2-00
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ¹⁾ (semi-matt)
Weight	Approx. 0.5 kg

Table 32: Technical data - 5AC800.CON2-00

¹⁾ Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

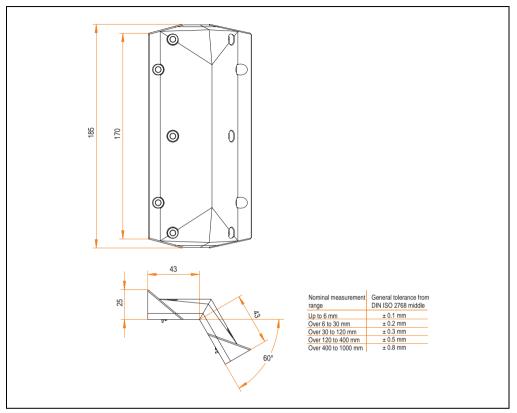


Figure 67: Dimensions - extension connector 60° 5AC800.CON2-00

Contents of delivery

Amount	Component
1	60° extension connector
10	Torx screws included

Table 33: Contents of delivery - extension connector 60° 5AC800.CON2-00

3.3.5 Extension flange 5AC800.FLG1-00

The extension flange is required for mounting on a swing arm system (see chapter 3 "Installation" on page 107 and "Installation of components" on page 108).



Figure 68: Extension flange 5AC800.FLG1-00

Features	5AC800.FLG1-00
Housing Material Gasket Paint	Aluminum (ADC12) Foam perimeter seal Similar to silver metallic ¹⁾ (semi-matt)
Weight	Approx. 0.6 kg

Table 34: Technical data - 5AC800.FLG1-00

¹⁾ Depending on the process or batch, there may be visible deviations in the color and surface structure.

Dimensions

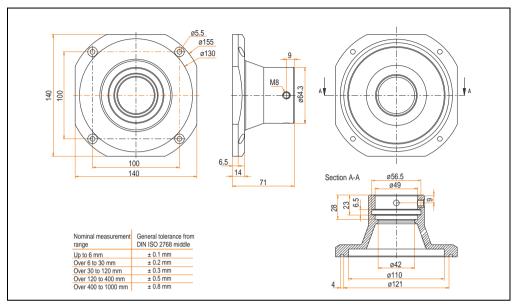


Figure 69: Dimensions - extension flange 5AC800.FLG1-00

Contents of delivery

Amount	Component
1	Extension flange
4	Torx screws included

Table 35: Contents of delivery - extension flange 5AC800.FLG1-00

3.4 Cables

3.4.1 Overview

Model number	Short description	Note
5CASDL.0018-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 1.8 meters	
5CASDL.0050-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 5 meters	
5CASDL.0100-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 10 meters	
5CASDL.0150-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 15 meters	
5CASDL.0200-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 20 meters	
5CASDL.0250-20	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 25 meters	
5CASDL.0300-30	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 30 meters with extender	
5CASDL.0400-30	SDL cable for Automation Panel 800; Rev. < A5 / Rev. ≥ A5; length 40 meters with extender	
5CAPWR.0018-20	Voltage supply cable for Automation Panel 800; length 1.8 meters.	
5CAPWR.0050-20	Voltage supply cable for Automation Panel 800; length 5 meters.	
5CAPWR.0100-20	Voltage supply cable for Automation Panel 800; length 10 meters.	
5CAPWR.0150-20	Voltage supply cable for Automation Panel 800; length 15 meters.	
5CAPWR.0200-20	Voltage supply cable for Automation Panel 800; length 20 meters.	
5CAPWR.0250-20	Voltage supply cable for Automation Panel 800; length 25 meters.	
5CAPWR.0300-20	Voltage supply cable for Automation Panel 800; length 30 meters.	
5CAPWR.0400-20	Voltage supply cable for Automation Panel 800; length 40 meters.	
5CAX2X.0018-20	X2X cable for Automation Panel 800; length 1.8 meters.	
5CAX2X.0050-20	X2X cable for Automation Panel 800; length 5 meters.	
5CAX2X.0100-20	X2X cable for Automation Panel 800; length 10 meters.	
5CAX2X.0150-20	X2X cable for Automation Panel 800; length 15 meters.	
5CAX2X.0200-20	X2X cable for Automation Panel 800; length 20 meters.	
5CAX2X.0250-20	X2X cable for Automation Panel 800; length 25 meters.	
5CAX2X.0300-20	X2X cable for Automation Panel 800; length 30 meters.	
5CAX2X.0400-20	X2X cable for Automation Panel 800; length 40 meters.	

Table 36: Model number overview - Cables

Chapter 2 Technical data

3.4.2 SDL cable 5CASDL.0xxx-20 Rev. < A5



Figure 70: SDL cable 5CASDL.0xxx-20 Rev. < A5

Caution!

SDL cables can only be plugged in and unplugged when the device is turned off.

Technical data

Features	5CASDL.0018-20	5CASDL.0050-20	5CASDL.0100-20	5CASDL.0150-20	5CASDL.0200-20	5CASDL.0250-20
Length	1,8 m ± 50 mm	5 m ± 200 mm	10 m ± 100 mm	15 m ± 120 mm	20 m ± 150 mm	25 m ± 200 mm
Outer diameter	Max.	9 mm		Max. 1	1.5 mm	
Shielding			Individual cable pa	irs and entire cable		
Connector type		ODU Minisnap 24-pin, DVI-D (24+1), male				
Wire cross section	AWG 28 AWG 24				G 24	
Line resistance	Max. 237 Ω/km Max. 93 Ω/km					
Insulation resistance			Min. 10	MΩ/km		
Flexibility		Flexible (not for use in drag chain installations)				
Flex radius	Min. 172 mm Min. 220 mm					
Plug connection cycles	100					
Weight	Approx. 300 g	Approx. 590 g	Approx. 2100 g	Approx. 3000 g	Approx. 4100 g	Approx. 5100 g

Table 37: Technical data - SDL cable 5CASDL.0xxx-20 Rev. < A5

Plug dimensions (ODU Minisnap)




Figure 71: Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-20 Rev. < A5 $\,$

Cable specifications

The following figure shows the pin assignments for the SDL cable available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

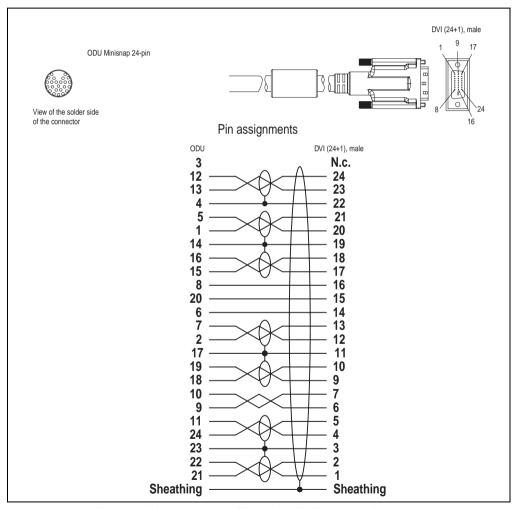


Figure 72: Pin assignments - SDL cable 5CASDL.0xxx-20 Rev. < A5

Chapter 2 Technical data

3.4.3 SDL cable with extender 5CASDL.0xxx-30 Rev. < A5



Figure 73: SDL cable with extender 5CASDL.0xxx-30 Rev. < A5

Caution!

SDL cables with extender can only be plugged in and unplugged when the device is turned off.

Technical data

Features	5CASDL.0300-30	5CADSDL.0400-30			
Length	30 m ± 280 mm 40 m ± 380 mm				
Dimensions of extender box	Height 20 mm, width 3	4 mm, length 125 mm			
Outer diameter	Max. 1	1.5 mm			
Shielding	Individual cable pai	irs and entire cable			
Connector type	ODU Minisnap 24-pin, DVI-D (24+1), male				
Wire cross section	AWG 24				
Line resistance	Max. 93 Ω/km				
Insulation resistance	Min. 10 MΩ/km				
Flexibility	Flexible (not for use in drag chain installations)				
Flex radius	Min. 220 mm				
Plug connection cycles	100				
Weight	Approx. 6250 g Approx. 8250 g				

Table 38: Technical data - SDL cable with extender 5CASDL.0xxx-30 Rev. < A5

Plug dimensions (ODU Minisnap)




Figure 74: Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-30 Rev. < A5

Cable specifications

The following figure shows the pin assignments for the SDL cable with extender available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

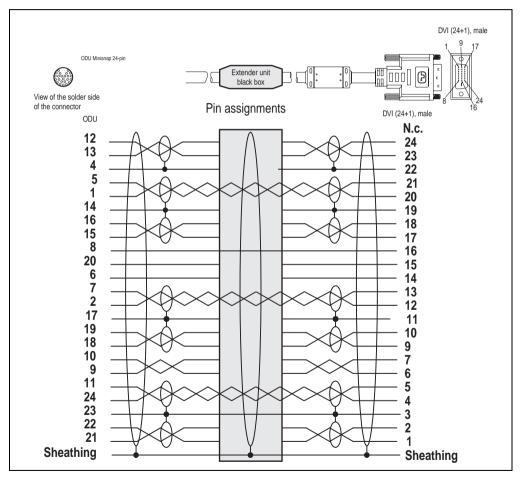


Figure 75: Pin assignments - SDL cable with extender 5CASDL.0xxx-30 Rev. < A5

3.4.4 SDL cable 5CASDL.0xxx-20 Rev. ≥ A5



Figure 76: SDL cable 5CASDL.0xxx-20 Rev. ≥ A5

Caution!

SDL cables can only be plugged in and unplugged when the device is turned off.

Mechanical characteristics	5CASDL.0018- 20	5CASDL.0050- 20	5CASDL.0100- 20	5CASDL.0150- 20	5CASDL.0200- 20	5CASDL.0250- 20	
Length	1,8 m ± 20 mm	5 m ± 45 mm	10 m ± 90 mm	15 m ± 135 mm	20 m ± 180 mm	25 m ± 230 mm	
Weight	approx. 450 g	approx. 1,000 g	approx. 2,000 g	approx. 3,000 g	approx. 4,000 g	approx. 5,000 g	
Outer diameter			Max. 1	12 mm			
Connector type Connection cycles		0		/ DVI-D (24+1), ma / 200	le		
Flexibility		Semi-flexible, o	occasional movemer	nt (limited use in cat	ole drag chains)		
Flex radius Single Moving			≥ 10 x cab ≥ 15 x cab				
Max. tension During installation During operation		≤400 N ≤50 N					
Materials Cable shielding Color	RoHS compliant Aluminum foil clad + tinned copper mesh Black (similar to RAL 9005)						
Shielding			Individual cable pa	irs and entire cable			
Electrical properties (at +20°C)							
Wire cross section			AWG 24	/ AWG 26			
Line resistance AWG 24 AWG 26	≤95Ω/km ≤145Ω/km						
Insulation resistance	Min. 10 MΩ/km						
Wave impedance	100 ± 10Ω						
Test voltage Wire/wire Wire/shield	1 kV _{eff} 0.5 kV _{eff}						
Operating voltage	≤30 V						

Table 39: Technical data - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5

Environmental characteristics	5CASDL.0018- 20	5CASDL.0050- 20	5CASDL.0100- 20	5CASDL.0150- 20	5CASDL.0200- 20	5CASDL.0250- 20	
Temperature resistance Fixed installation Moving Storage	-20 °C +80 °C -5 °C +60 °C -20 °C +80 °C						
Standards and certifications							
Torsion load ¹⁾		100,000 cycles					
Cable drag chain ¹⁾		250,000 cycles					
Approbation	UL AWM 20236 80 °C 30 V						
Oil and hydrolysis resistance	According to VDE 0282-10						

Table 39: Technical data - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5 (cont.)

1) See "SDL flex cable - test description" on page 150

Plug dimensions (ODU Minisnap)




Figure 77: Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5

Cable specifications

The following figure shows the pin assignments for the SDL cable available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

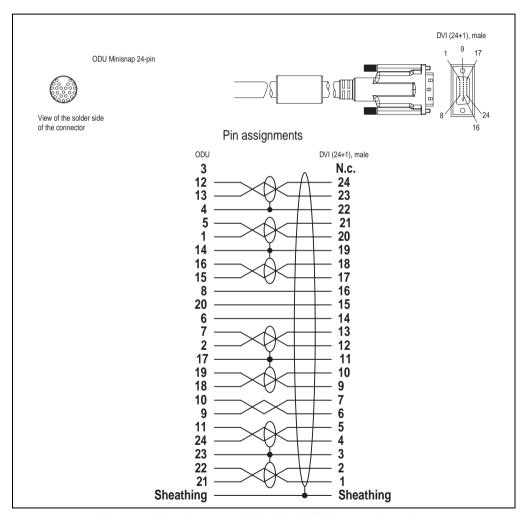


Figure 78: Pin assignments - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5

3.4.5 SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5



Figure 79: SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5

Caution!

SDL cables with extender can only be plugged in and unplugged when the device is turned off.

Mechanical characteristics	5CASDL.0300-30	5CADSDL.0400-30			
Length	1.8 m ± 20 mm	5 m ± 45 mm			
Weight	approx. 450 g approx. 1,000 g				
Outer diameter	Max. 1	12 mm			
Connector type Connection cycles	ODU Minisnap 24-pin 2000				
Flexibility	Semi-flexible, occasional movemen	nt (limited use in cable drag chains)			
Flex radius Single Moving	≥ 10 x cable diameter ≥ 15 x cable diameter				
Max. tension During installation During operation	⊴40 ⊴50	* : :			
Materials Cable shielding Color	RoHS compliant Aluminum foil clad + tinned copper mesh Black (similar to RAL 9005)				
Shielding	Individual cable pai	irs and entire cable			
Electrical properties (at +20°C)					
Wire cross section	AWG 24 /	/ AWG 26			
Line resistance AWG 24 AWG 26	≤95 Ω/km ≤145 Ω/km				
Insulation resistance	Min. 10 MΩ/km				
Wave impedance	100 ± 10Ω				
Test voltage Wire/wire Wire/shield	1 kV _{eff} 0.5 kV _{eff}				
Operating voltage	≤30 V				

Table 40: Technical data - SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5

Environmental characteristics	5CASDL.0300-30	5CADSDL.0400-30			
Temperature resistance Fixed installation Moving Storage	-20 °C +80 °C -5 °C +60 °C -20 °C +80 °C				
Standards and certifications					
Torsion load ¹⁾	100,000 cycles				
Cable drag chain ¹⁾	250,000 cycles				
Approbation	UL AWM 20236 80 °C 30 V				
Oil and hydrolysis resistance	According to VDE 0282-10				

Table 40: Technical data - SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5

Plug dimensions (ODU Minisnap)




Figure 80: Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-30 Rev. ≥ A5

¹⁾ See "SDL flex cable - test description" on page 150

Cable specifications

The following figure shows the pin assignments for the SDL cable with extender available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

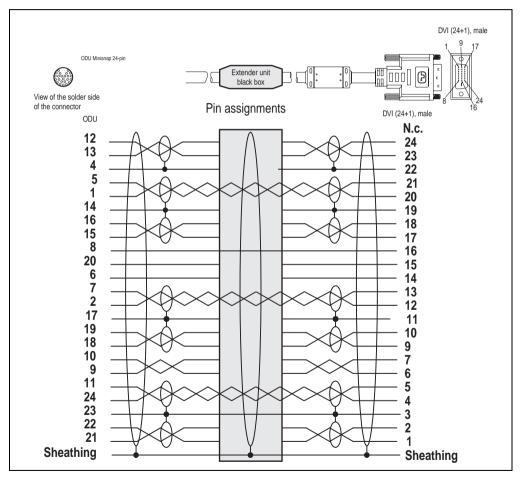


Figure 81: Pin assignments - SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5

3.4.6 Voltage supply cable 5CAPWR.0xxx-20




Figure 82: Voltage supply cable 5CAPWR.0xxx-20

Technical data

Features	5CAPWR.00 18-20	5CAPWR.00 50-20	5CAPWR.01 00-20	5CAPWR.01 50-20	5CAPWR.02 00-20	5CAPWR.02 50-20	5CAPWR.03 00-20	5CAPWR.04 00-20
Length	1.8 m ± 20 mm	5 m ± 45 mm	10 m ± 90 mm	15 m ± 135 mm	20 m ± 180 mm	25 m ± 230 mm	30 m ± 330 mm	40 m ± 380 mm
Connector type				ODU Mini	snap 3-pin			
Weight kg/km				80	0.0			
Cable diameter				6.6	mm			
Flexibility			Flexible	e (not for use in	drag chain instal	lations)		
Flex radius				15x AD (out	er diameter)			
Materials Cable shielding Color		Aluminum foil clad + tinned copper mesh Gray (similar to RAL 7001)						
Wire cross section		1.00 mm ² / AWG 17						
Line resistance		Max. 19.5 Ω/km						
Insulation resistance		Min. 200 Ms2km at +20°C						
Test voltage		2000 V						
Operating voltage		Max. 500 V						
Current load				16.0 A a	at +25°C			

Table 41: Technical data - voltage supply cable 5CAPWR.0xxx-20

Plug dimensions (ODU Minisnap)




Figure 83: Plug dimensions (ODU Minisnap) - voltage supply cable 5CAPWR.0xxx-20

Cable specifications

The following figure shows the pin assignments for the voltage supply cable available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications. The maximum length is also 40 m for self-built cables.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

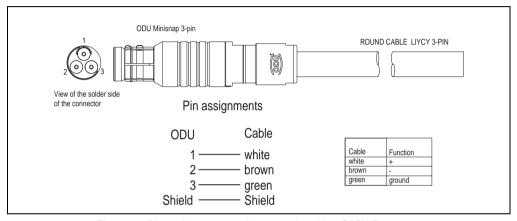


Figure 84: Pin assignments - voltage supply cable 5CAPWR.0xxx-20

3.4.7 X2X cable 5CAX2X.0xxx-20



Figure 85: X2X cable 5CAX2X.0xxx-20

Technical data

Features	5CAX2X.00 18-20	5CAX2X.00 50-20	5CAX2X.01 00-20	5CAX2X.01 50-20	5CAX2X.02 00-20	5CAX2X.02 50-20	5CAX2X.03 00-20	5CAX2X.04 00-20
Length	1.8 m ± 20mm	5 m ± 45mm	10 m ± 90mm	15 m ± 135mm	20 m ± 180mm	25 m ± 230mm	30 m ± 280mm	40 m ± 380mm
Connector type				ODU Minis	snap 10-pin			
Weight kg/km				60 k	g/km			
Cable diameter				6.8	mm			
Flexibility				Semi-f	flexible			
Flex radius Single Moving		10x outer diameter 15x outer diameter						
Materials Cable shielding Color		Aluminum foil clad + tinned copper mesh Violet (similar to RAL 4001)						
Wire cross section DeviceNet data pair 6 wires		AWG 24 AWG 28						
Line resistance AWG 24 AWG 28		Max. 89Ω/km Max. 220Ω/km						
Insulation resistance	Min. 200MΩ/km							
Test voltage	1,000 V							
Operating voltage	Max. 30V							
Current load		TBD A						

Table 42: Technical data - X2X cable 5CAX2X.0xxx-20

Plug dimensions (ODU Minisnap)




Figure 86: Plug dimensions (ODU Minisnap) - X2X cable 5CAX2X.0xxx-20

Cable specifications

The following figure shows the pin assignments for the X2X cable available at B&R. If you want to build a suitable cable yourself, it should be wired according to these specifications.

Warning!

If a self-built cable is used, B&R cannot guarantee that it will function properly. The SDL cables provided by B&R are guaranteed to function properly.

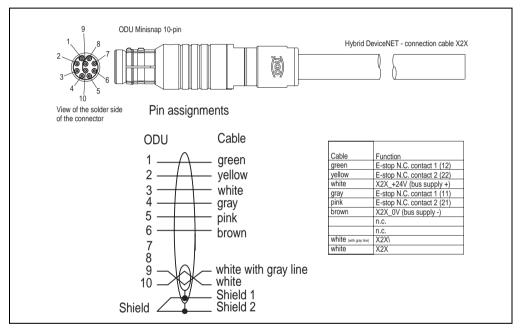


Figure 87: Pin assignments, X2X cable 5CAX2X.0xxx-20

Chapter 3 • Commissioning

1. X2X wiring diagram

Information:

Only power supplies provided by B&R can be used to supply the X2X Link bus connection.

The X2X Link bus connection uses an RS485 half-duplex point-to-point connection; transfer is unidirectional. X2X topology uses a point-to-point connection. A series connection is made to each extension unit connection slot from the X2X/E-stop cable connector on the main unit. The link has a specified direction for transferring data. The transfer rate is 12 MBaud.

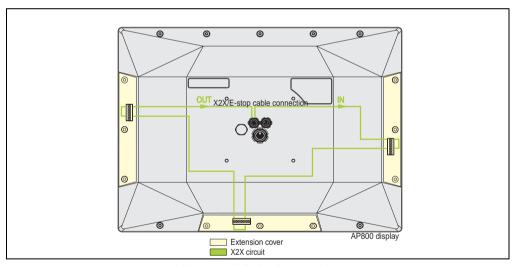


Figure 88: X2X circuit - rear view

The AP800 is always at the end of the bus connection, i.e.: The bus connection cannot be forwarded to any other X2X nodes after the AP800.

Commissioning • X2X wiring diagram




Figure 89: X2X Link topology

1.1 X2X functionality if the PC crashes

The Automation Panel 800 device is connected to the PC using an SDL connection. The supply and the X2X Link bus connection are both connected to the AP800 device independent to the SDL connection.

For X2X functionality, the supply and the X2X Link bus connection are required. If this is the case, extension units that can be operated via the PC and X2X (C key extensions) can also be accessed and operated without a connection to the PC. That means the machine or system remains operational.

Chapter 3 Commissioning

2. E-stop wiring diagram

Each extension unit can have its own E-stop button.

To guarantee that the E-stop functions properly, a two-channel E-stop series connection is made to each extension unit connection slot from the X2X/E-stop cable connector on the main unit.

The following wiring diagrams provide a more detailed explanation of various configurations.

- 1) Without extension unit
- 2) With extension unit, with E-stop button
- 3) With extension unit, without E-stop button

Commissioning • E-stop wiring diagram

2.1 Without extension unit

An extension cover must be mounted on each extension unit connection slot that is not being used. The cover uses a spring contact on an intermediate circuit board to connect the E-stop series circuit and therefore guarantees that it functions properly.

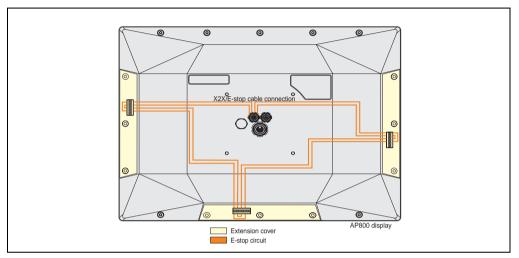


Figure 90: E-stop wiring diagram for the extension cover - rear view

2.2 Extension unit with E-stop

For an extension unit (in this case C key extension right) with an E-stop button, the connection from the AP800 display to the extension unit is made using an extension connector with spring contacts on an intermediate circuit board. The E-stop button is on the extension unit, and both N.C. contacts on the E-stop switching element (and therefore the E-stop series circuit) are closed when it is not activated.

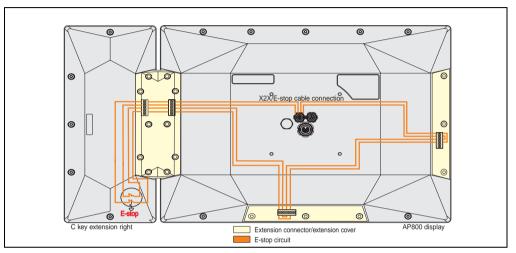


Figure 91: E-stop wiring diagram for the extension unit with E-stop - rear view

2.3 Extension unit without E-stop

For an extension unit (in this case extension keyboard) without an E-stop button, the connection from the AP800 display to the extension unit is made using an extension connector with two spring contacts on an intermediate circuit board. The E-stop contacts are connected so that the E-stop series circuit remains intact.

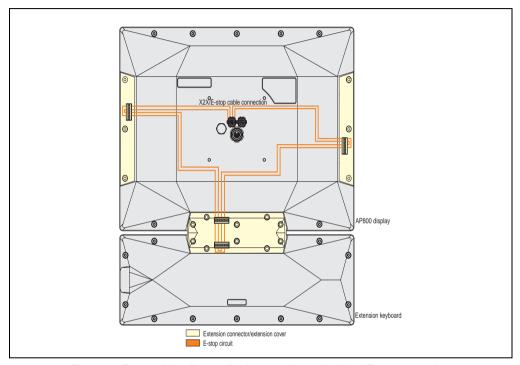


Figure 92: E-stop wiring diagram for the extension unit without E-stop - rear view

2.4 Current load

Warning!

Pay attention to the max. permitted current load of the E-stop circuit!

	Max. current load	Max. voltage
E-Stop circuit	0.4 A	32 VDC

Table 43: E-stop circuit current load

3. Installation

An Automation Panel 800 device is primarily mounted on a swing arm system. To make this possible, an extension flange is installed on the back of the display (also see chapter 2 "Extension flange 5AC800.FLG1-00" on page 84 and "Installation of components" on page 108). The tubing of the swing arm system cannot be bent immediately after the end of the flange; it must be straight for a min. of 50 mm so that the plugs can be connected. The bending radius of the cables must also be taken into consideration (see "Cables" on page 86).

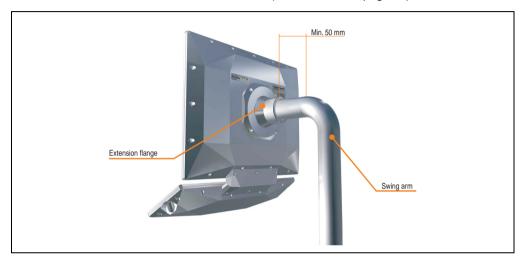


Figure 93: Swing arm system mounting

The cables run through the tubing and the plugs are covered by the extension flange. The plugs must be connected to the respective sockets.

The plugs and the sockets are marked with a red dot to ensure proper connection (see "Pin assignments" on page 42).

Commissioning • Installation

3.1 Installation of components

The extension flange (and depending on the configuration the extension connector and extension covers) are installed using the included Torx screws.

The maximum torque is 2 Nm.

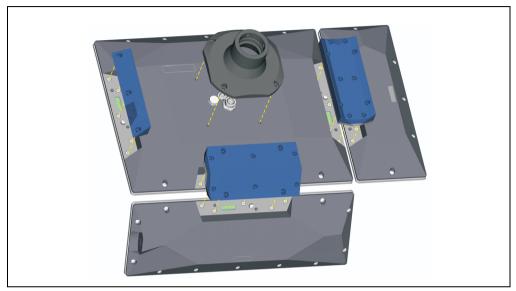


Figure 94: Configuration example 2 - installing the components

3.2 Mounting orientation

The following diagrams show the specified mounting orientation for the Automation Panel 800 device.

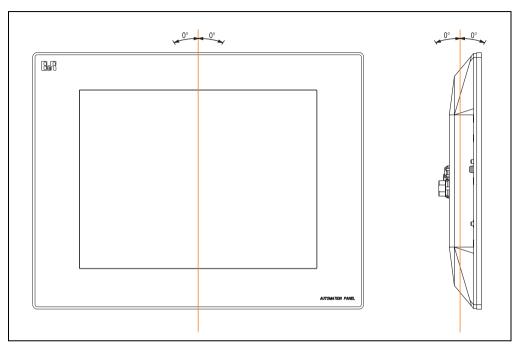


Figure 95: Mounting orientation 0°

Commissioning • Installation

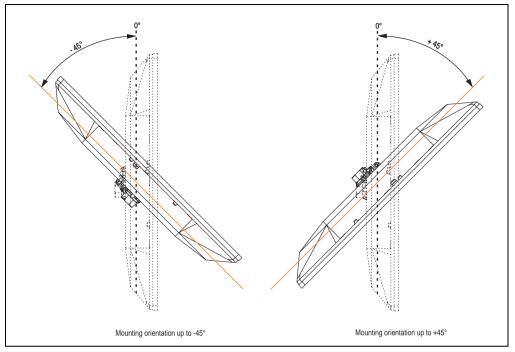


Figure 96: Mounting orientation -45° and +45°.

Warning!

Because of the changed thermal properties with some mounting orientations, e.g. +/- 45°, the maximum ambient temperature of the Automation Panel 800 specified for 0° mounting orientation cannot be achieved during operation. The limit values that apply in this situation can be found in the technical data for the Automation Panel device.

4. Connection examples

The following examples provide an overview of the configuration options for connecting Automation Panel 800 and Automation Panel 900 devices with the APC620. The following questions will be answered:

- How are Automation Panel 800 devices connected to the monitor / panel output of the APC620, and what needs to be considered?
- How are Automation Panel 800 and Automation Panel 900 devices connected to the monitor / panel output of the APC620, and what needs to be considered?
- What are "Display Clone" and "Extended Desktop" modes?
- How many Automation Panel 900 devices can be connected to an Automation Panel 800 device per line?
- How are the connected Automation Panel 800 and Automation Panel 900 devices numbered internally?
- Are there limitations to the segment length and if so, what are they?
- Which cables are required?
- Do BIOS settings have to be changed for a specific configuration?

4.1 Selecting the display units

If an Automation Panel 800 and an Automation Panel 900 should be connected on the same line, the devices must have the same display type.

The following table lists the AP900 devices that can be connected on the same line with an AP800 device.

Automation Panel 800	Automation Panel 900
5AP820.1505-00	5AP920.1505-01 5AP951.1505-01 5AP980.1505-01 5AP981.1505-01
5AP880.1505-00	5AP920.1505-01 5AP951.1505-01 5AP980.1505-01 5AP981.1505-01

Table 44: Selecting the display units

4.2 An Automation Panel 800 via SDL (onboard)

An Automation Panel 800 is connected to the integrated SDL interface (onboard) via an SDL cable. USB devices can only be connected directly to the extension keyboard (without a hub).

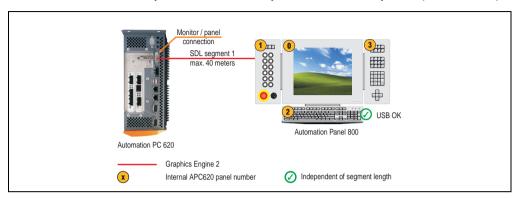


Figure 97: Configuration - An Automation Panel 800 via SDL (onboard)

4.2.1 Basic system requirements

The following table shows the possible combinations for the APC620 system unit with CPU board to implement the configuration shown in the figure above. If the maximum resolution is limited when making the combination then it is also shown in this table.

	with system unit				Limitation	
CPU board	5PC600.SX01-00	5PC600.SX02-00	5PC600.SX02-01	5PC600.SX05-00	5PC600.SX05-01	Resolution
5PC600.E855-00	1	1	1	1	1	Max. UXGA
5PC600.E855-01	1	1	1	1	1	Max. UXGA
5PC600.E855-02	1	1	1	1	1	Max. UXGA
5PC600.E855-03	1	1	1	1	1	Max. UXGA
5PC600.E855-04	1	1	1	1	1	Max. UXGA
5PC600.E855-05	1	1	1	1	1	Max. UXGA

Table 45: Possible combinations of system unit and CPU board

4.2.2 Cable

Select an SDL cable from the following table.

Model number	Туре	Length
5CASDL.0018-20	SDL w/o extender	1.8 m
5CASDL.0050-20	SDL w/o extender	5 m
5CASDL.0100-20	SDL w/o extender	10 m
5CASDL.0150-20	SDL w/o extender	15 m
5CASDL.0200-20	SDL w/o extender	20 m
5CASDL.0250-20	SDL w/o extender	25 m
5CASDL.0300-30	SDL w/ extender	30 m
5CASDL.0400-30	SDL w/ extender	40 m

Table 46: Cables for SDL configurations

Cable lengths and resolutions for SDL transfer

The following table shows the relationship between segment lengths and the maximum resolution according to the SDL cable used:

Cable	Resolution
Segment length [m]	XGA 1024 x 768
1.8	5CASDL.0018-20
5	5CASDL.0050-20
10	5CASDL.0100-20
15	5CASDL.0150-20
20	5CASDL.0200-20 ¹⁾
25	5CASDL.0250-20 ¹⁾
30	5CASDL.0300-30 ²⁾
40	5CASDL.0400-30 ²⁾

Table 47: Segment lengths, resolutions and SDL cables

¹⁾ See table 48 "Requirements for SDL cable with automatic cable adjustment (equalizer)"

²⁾ See table 49 "Requirements for SDL cable with extender and automatic cable adjustment (equalizer)"

The cable types and resolutions shown with a footnote 1) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.

Table 48: Requirements for SDL cable with automatic cable adjustment (equalizer)

The cable types and resolutions shown with a footnote 2) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.
Hardware	Name	Revision	Note
5PC600.SX01-00	System 1 PCI	Rev. E0	-
5PC600.SX02-00	System 2 PCI, 1 disk drive slot, 1 AP Link slot	Rev. D0	-
5PC600.SX02-01	System 2 PCI, 1 disk drive slot	Rev. E0	-
5PC600.SX05-00	System 5 PCI, 2 disk drive slots, 1 AP Link slot	Rev. C0	-
5PC600.SX05-01	System 5 PCI, 2 disk drive slots	Rev. C0	-

Table 49: Requirements for SDL cable with extender and automatic cable adjustment (equalizer)

4.2.3 BIOS settings

No special BIOS settings are necessary for operation.

4.2.4 Windows graphics driver settings

"Digital display" must be defined as output device in the graphics driver. For detailed information, see the APC620 user's manual.

4.2.5 Settings - Windows touch driver

For detailed information, see the APC620 user's manual.

4.3 An AP900 and an AP800 via SDL (onboard)

An Automation Panel 900 and an Automation Panel 800 are connected to the integrated SDL interface (onboard) via SDL.

USB is supported up to a maximum distance (segment 1 + segment 2) of 30 m on the two displays. Starting at a distance of 30 m, USB is only available on the first display (front and back) up to a maximum of 40 m. USB devices can only be connected directly to the Automation Panel 900 or extension keyboard (without a hub).

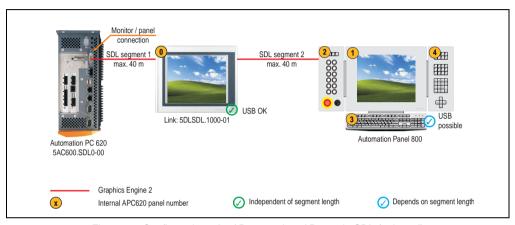


Figure 98: Configuration - An AP900 and an AP800 via SDL (onboard)

4.3.1 Basic system requirements

The following table shows the possible combinations for the APC620 system unit with CPU board to implement the configuration shown in the figure above. If the maximum resolution is limited when making the combination then it is also shown in this table.

	with system unit				Limitation		
CPU board	5PC600.SX01-00	5PC600.SX01-00 5PC600.SX02-00 5PC600.SX02-01 5PC600.SX05-00 5PC600.SX05-01					
5PC600.E855-00	✓	1	1	1	1	Max. UXGA	
5PC600.E855-01	1	1	1	1	1	Max. UXGA	
5PC600.E855-02	1	1	1	1	1	Max. UXGA	
5PC600.E855-03	✓	1	1	1	1	Max. UXGA	
5PC600.E855-04	✓	1	1	1	1	Max. UXGA	
5PC600.E855-05	✓	1	1	1	1	Max. UXGA	

Table 50: Possible combinations of system unit and CPU board

4.3.2 Cable

Selecting an SDL cable for the connection of the AP800 display to the AP900 display. The selection table for the cable used to connect the AP900 displays can be found in the AP900 user's manual or the APC620 user's manual.

Information:

The following model numbers are only for connecting the AP800 display. Cables for the other SDL segments can be found in the APC620 user's manual.

Model number	Туре	Length
5CASDL.0018-20	SDL w/o extender	1.8 m
5CASDL.0050-20	SDL w/o extender	5 m
5CASDL.0100-20	SDL w/o extender	10 m
5CASDL.0150-20	SDL w/o extender	15 m
5CASDL.0200-20	SDL w/o extender	20 m
5CASDL.0250-20	SDL w/o extender	25 m
5CASDL.0300-30	SDL w/ extender	30 m
5CASDL.0400-30	SDL w/ extender	40 m

Table 51: Cables for SDL configurations

Cable lengths and resolutions for SDL transfer

The following table shows the relationship between segment lengths and the maximum resolution according to the SDL cable used:

Cable	Resolution
Segment length [m]	XGA 1024 x 768
1.8	5CASDL.0018-20
5	5CASDL.0050-20
10	5CASDL.0100-20
15	5CASDL.0150-20
20	5CASDL.0200-20 ¹⁾
25	5CASDL.0250-20 ¹⁾
30	5CASDL.0300-30 ²⁾
40	5CASDL.0400-30 ²⁾

Table 52: Segment lengths, resolutions and SDL cables

¹⁾ See table 53 "Requirements for SDL cable with automatic cable adjustment (equalizer)"

²⁾ See table 54 "Requirements for SDL cable with extender and automatic cable adjustment (equalizer)"

The cable types and resolutions shown with a footnote 1) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.

Table 53: Requirements for SDL cable with automatic cable adjustment (equalizer)

The cable types and resolutions shown with a footnote 2) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.
Hardware	Name	Revision	Note
5PC600.SX01-00	System 1 PCI	Rev. E0	-
5PC600.SX02-00	System 2 PCI, 1 disk drive slot, 1 AP Link slot	Rev. D0	-
5PC600.SX02-01	System 2 PCI, 1 disk drive slot	Rev. E0	-
5PC600.SX05-00	System 5 PCI, 2 disk drive slots, 1 AP Link slot	Rev. C0	-
5PC600.SX05-01	System 5 PCI, 2 disk drive slots	Rev. C0	-

Table 54: Requirements for SDL cable with extender and automatic cable adjustment (equalizer)

4.3.3 BIOS settings

No special BIOS settings are necessary for operation.

4.3.4 Windows graphics driver settings

"Digital display" must be defined as output device in the graphics driver. For detailed information, see the APC620 user's manual.

4.3.5 Settings - Windows touch driver

For detailed information, see the APC620 user's manual.

4.4 Three AP900 devices with an AP800 via SDL (onboard)

Up to four Automation Panels can be connected to the integrated SDL interface (onboard). At the fourth location, an Automation Panel 800 can be operated via SDL. All four displays show the same content (Display Clone).

USB is supported up to a maximum distance (segment 1 + segment 2) of 30 m on the first two displays. Starting at a distance of 30 m, USB is only available on the first display (front and back) up to a maximum of 40 m. USB devices can only be connected directly to Automation Panel 900 devices (without a hub).

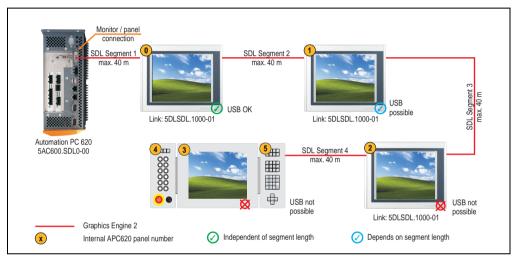


Figure 99: Configuration - Three AP900 devices and an AP800 via SDL (onboard)

4.4.1 Basic system requirements

The following table shows the possible combinations for the APC620 system unit with CPU board to implement the configuration shown in the figure above. If the maximum resolution is limited when making the combination then it is also shown in this table.

	with system unit					Limitation
CPU board	5PC600.SX01-00	5PC600.SX02-00	5PC600.SX02-01	5PC600.SX05-00	5PC600.SX05-01	Resolution
5PC600.E855-00	1	1	1	1	1	Max. UXGA
5PC600.E855-01	1	1	1	1	1	Max. UXGA
5PC600.E855-02	1	1	1	1	1	Max. UXGA
5PC600.E855-03	1	1	1	1	1	Max. UXGA
5PC600.E855-04	1	1	1	1	1	Max. UXGA
5PC600.E855-05	1	✓	1	1	1	Max. UXGA

Table 55: Possible combinations of system unit and CPU board

4.4.2 Cable

Selecting an SDL cable for the connection of the AP800 display to the last AP900 display. The selection table for the cable used to connect the AP900 displays can be found in the AP900 user's manual or the APC620 user's manual.

Information:

The following model numbers are only for connecting the AP800 display. Cables for the other SDL segments can be found in the APC620 user's manual.

Model number	Туре	Length
5CASDL.0018-20	SDL w/o extender	1.8 m
5CASDL.0050-20	SDL w/o extender	5 m
5CASDL.0100-20	SDL w/o extender	10 m
5CASDL.0150-20	SDL w/o extender	15 m
5CASDL.0200-20	SDL w/o extender	20 m
5CASDL.0250-20	SDL w/o extender	25 m
5CASDL.0300-30	SDL w/ extender	30 m
5CASDL.0400-30	SDL w/ extender	40 m

Table 56: Cables for SDL configurations

Cable lengths and resolutions for SDL transfer

The following table shows the relationship between segment lengths and the maximum resolution according to the SDL cable used:

Cable	Resolution		
Segment length [m]	XGA 1024 x 768		
1.8	5CASDL.0018-20		
5	5CASDL.0050-20		
10	5CASDL.0100-20		
15	5CASDL.0150-20		
20	5CASDL.0200-20 ¹⁾		
25	5CASDL.0250-20 ¹⁾		
30	5CASDL.0300-30 ²⁾		
40	5CASDL.0400-30 ²⁾		

Table 57: Segment lengths, resolutions and SDL cables

¹⁾ See table 58 "Requirements for SDL cable with automatic cable adjustment (equalizer)"

²⁾ See table 59 "Requirements for SDL cable with extender and automatic cable adjustment (equalizer)"

The cable types and resolutions shown with a footnote 1) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.

Table 58: Requirements for SDL cable with automatic cable adjustment (equalizer)

The cable types and resolutions shown with a footnote 2) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.
Hardware	Name	Revision	Note
5PC600.SX01-00	System 1 PCI	Rev. E0	-
5PC600.SX02-00	System 2 PCI, 1 disk drive slot, 1 AP Link slot	Rev. D0	-
5PC600.SX02-01	System 2 PCI, 1 disk drive slot	Rev. E0	-
5PC600.SX05-00	System 5 PCI, 2 disk drive slots, 1 AP Link slot	Rev. C0	-
5PC600.SX05-01	System 5 PCI, 2 disk drive slots	Rev. C0	-

Table 59: Requirements for SDL cable with extender and automatic cable adjustment (equalizer)

4.4.3 BIOS settings

No special BIOS settings are necessary for operation.

4.4.4 Windows graphics driver settings

"Digital display" must be defined as output device in the graphics driver. For detailed information, see the APC620 user's manual.

4.4.5 Settings - Windows touch driver

For detailed information, see the APC620 user's manual.

4.5 Six AP900 and two AP800 devices via SDL (onboard) and SDL (AP Link)

Three Automation Panel 900 (max. UXGA) units and one Automation Panel 800 are connected to the integrated SDL interface (onboard) via SDL. Additionally, three Automation Panel 900 (max. UXGA) units and one Automation Panel 800 are operated on the optional SDL transmitters. The Automation Panels in each line must be the same type. The display content of the two lines is different (Extended Desktop), but the displays in the same line show the same content (Display Clone).

USB is supported up to a maximum distance (segment 1 + segment 2) of 30 m on the first two displays. Starting at a distance of 30 m, USB is only available on the first display (front and back) up to a maximum of 40 m. USB devices can only be connected directly to Automation Panel 900 devices (without a hub).

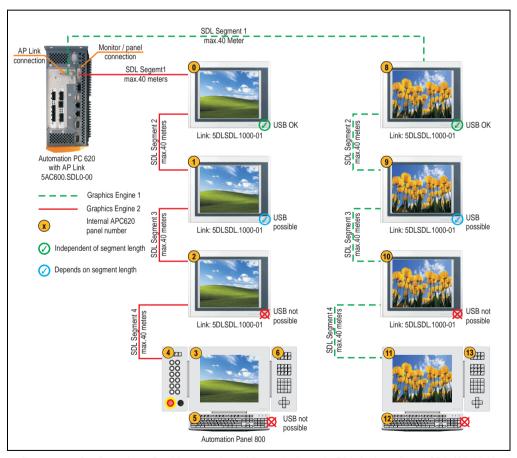


Figure 100: Configuration - Six AP900 and two AP800 devices via SDL (onboard) and SDL (AP Link)

4.5.1 Basic system requirements

The following table shows the possible combinations for the APC620 system unit with CPU board to implement the configuration shown in the figure above. If the maximum resolution is limited when making the combination then it is also shown in this table.

	with system unit				Limitation	
CPU board	5PC600.SX01-00	5PC600.SX02-00	5PC600.SX02-01	5PC600.SX05-00	5PC600.SX05-01	Resolution
5PC600.E855-00	1	1	1	1	1	Max. UXGA
5PC600.E855-01	1	✓	1	✓	1	Max. UXGA
5PC600.E855-02	1	1	1	1	1	Max. UXGA
5PC600.E855-03	1	✓	1	✓	1	Max. UXGA
5PC600.E855-04	1	✓	1	✓	1	Max. UXGA
5PC600.E855-05	1	1	1	1	1	Max. UXGA

Table 60: Possible combinations of system unit and CPU board

4.5.2 Cable

Selecting an SDL cable for the connection of the AP800 display to the last AP900 display. The selection table for the cable used to connect the AP900 displays can be found in the AP900 user's manual or the APC620 user's manual.

Information:

The following model numbers are only for connecting the AP800 display. Cables for the other SDL segments can be found in the APC620 user's manual.

Model number	Туре	Length
5CASDL.0018-20	SDL w/o extender	1.8 m
5CASDL.0050-20	SDL w/o extender	5 m
5CASDL.0100-20	SDL w/o extender	10 m
5CASDL.0150-20	SDL w/o extender	15 m
5CASDL.0200-20	SDL w/o extender	20 m
5CASDL.0250-20	SDL w/o extender	25 m
5CASDL.0300-30	SDL w/ extender	30 m
5CASDL.0400-30	SDL w/ extender	40 m

Table 61: Cables for SDL configurations

Cable lengths and resolutions for SDL transfer

The following table shows the relationship between segment lengths and the maximum resolution according to the SDL cable used:

Cable	Resolution		
Segment length [m]	XGA 1024 x 768		
1,8	5CASDL.0018-20		
5	5CASDL.0050-20		
10	5CASDL.0100-20		
15	5CASDL.0150-20		
20	5CASDL.0200-20 ¹⁾		
25	5CASDL.0250-20 ¹⁾		
30	5CASDL.0300-30 ²⁾		
40	5CASDL.0400-30 ²⁾		

Table 62: Segment lengths, resolutions and SDL cables

- 1) See table 63 "Requirements for SDL cable with automatic cable adjustment (equalizer)"
- 2) See table 64 "Requirements for SDL cable with extender and automatic cable adjustment (equalizer)"

The cable types and resolutions shown with a footnote 1) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.

Table 63: Requirements for SDL cable with automatic cable adjustment (equalizer)

The cable types and resolutions shown with a footnote 2) in the previous table can only be implemented starting with the following firmware and hardware versions:

Firmware	Name	Version	Note
MTCX FPGA	Firmware on the APC620	v 01.15	The version is read from BIOS - see the BIOS description.
MTCX PX32	Firmware on the APC620	v 01.55	Supported starting with the APC620 / PPC 700 Firmware upgrade (MTCX, SDLR, SDLT) V01.10 , available in the download area of the B&R homepage.
Hardware	Name	Revision	Note
5PC600.SX01-00	System 1 PCI	Rev. E0	-
5PC600.SX02-00	System 2 PCI, 1 disk drive slot, 1 AP Link slot	Rev. D0	-

Table 64: Requirements for SDL cable with extender and automatic cable adjustment (equalizer)

Firmware	Name	Version	Note
5PC600.SX02-01	System 2 PCI, 1 disk drive slot	Rev. E0	-
5PC600.SX05-00	System 5 PCI, 2 disk drive slots, 1 AP Link slot	Rev. C0	-
5PC600.SX05-01	System 5 PCI, 2 disk drive slots	Rev. C0	-

Table 64: Requirements for SDL cable with extender and automatic cable adjustment (equalizer) (cont.)

4.5.3 BIOS settings

No special BIOS settings are necessary for operation.

4.5.4 Windows graphics driver settings

"Digital display" must be defined as output device in the graphics driver. For detailed information, see the APC620 user's manual.

4.5.5 Settings - Windows touch driver

For detailed information, see the APC620 user's manual.

4.6 Internal numbering of the extension units

An extension unit for an AP800 device is numbered like another device. The numbering of the extension units starts from the display unit and goes in the counter-clockwise direction; all extension unit slots that are not used are left out.

The following graphic shows numbering examples.

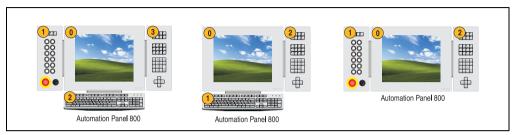


Figure 101: Examples - internal numbering of the extension units

5. Key and LED configurations

Each key or LED can be configured individually and adjusted to suit the application. Various B&R tools are available for this purpose:

- B&R Key Editor for Windows operating systems
- Visual Components for Automation Runtime

Keys and LEDs from each device are processed by the matrix controller in a bit sequence of 128 bits each.

The positions of the keys and LEDs in the matrix are shown as hardware numbers. The hardware numbers can be read directly on the target system, for example with the B&R Key Editor and the B&R Control Center.

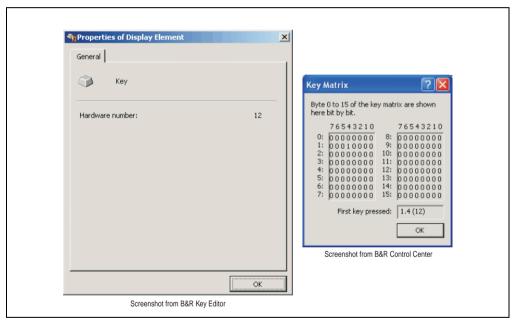


Figure 102: Example - Hardware number in the B&R Key Editor or in the B&R Control Center

The following graphics show the positions of the keys and LEDs in the matrix. They are shown as follows.




Figure 103: Display - Keys and LEDs in the matrix

Chapter 3 Commissioning

5.1 Display unit

5.1.1 5AP880.1505-00

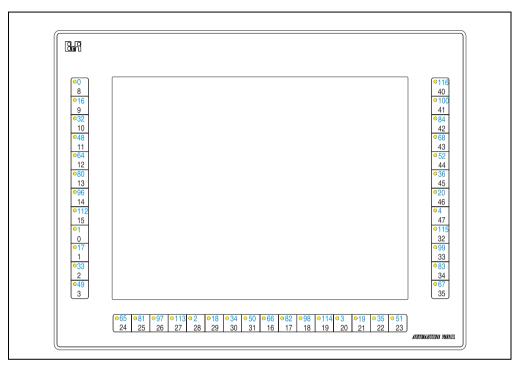


Figure 104: Hardware number - 5AP880.1505-00

Commissioning • Key and LED configurations

5.2 Extension units

5.2.1 Extension keyboard 5AC800.EXT1-00

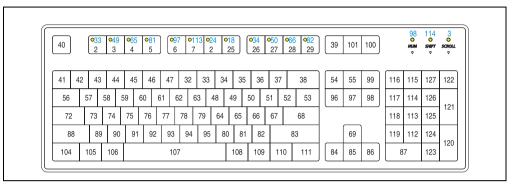


Figure 105: Hardware numbers - 5AC800.EXT1-00

5.2.2 F key extension left 5AC800.EXT2-00 / right 5AC800.EXT2-01

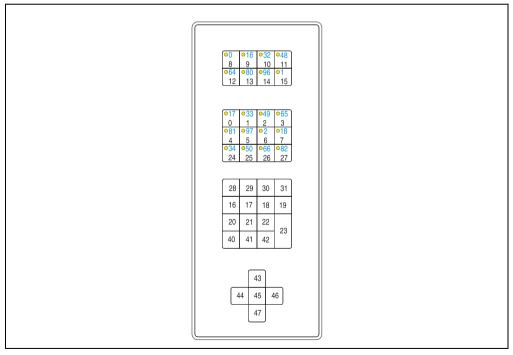


Figure 106: Hardware numbers - 5AC800.EXT2-00 / 5AC800.EXT2-01

5.2.3 C key extension 8PB left 5AC800.EXT3-00 / right 5AC800.EXT3-01

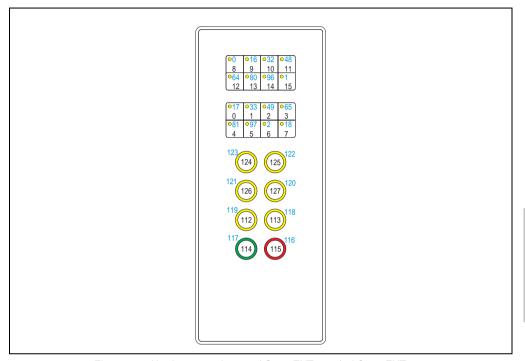


Figure 107: Hardware numbers - 5AC800.EXT3-00 / 5AC800.EXT3-01

5.2.4 C key extension 12PB left 5AC800.EXT3-02 / right 5AC800.EXT3-03

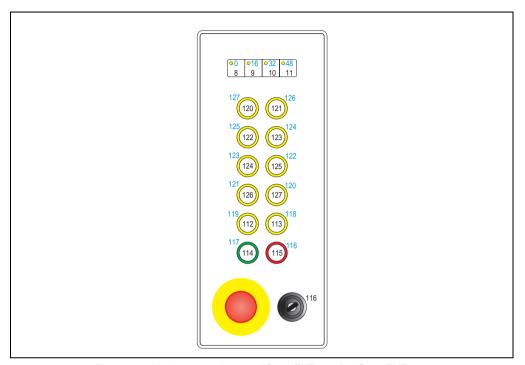


Figure 108: Hardware numbers - 5AC800.EXT3-02 / 5AC800.EXT3-03

Chapter 3 Commissioning

5.2.5 C key extension 8PB left 5AC800.EXT3-04 / right 5AC800.EXT3-05

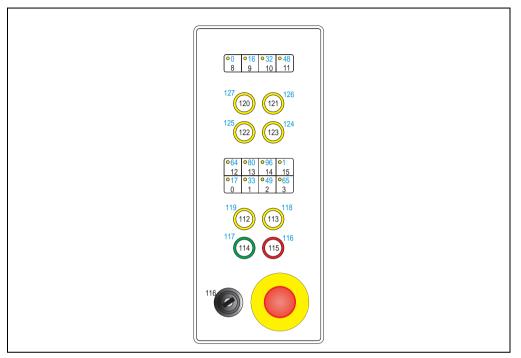


Figure 109: Hardware numbers - 5AC800.EXT3-04 / 5AC800.EXT3-05

Commissionin	q • Ke	y and LED	D configurations
--------------	--------	-----------	-------------------------

Chapter 4 • Software

1. B&R Key Editor information

On display units, it is often necessary to adjust the function keys and LEDs for the application software being used. With the B&R Key Editor, it is possible to quickly and easily set up the application individually. Automation Panel 800 devices are supported starting with B&R Key Editor Version 2.50.

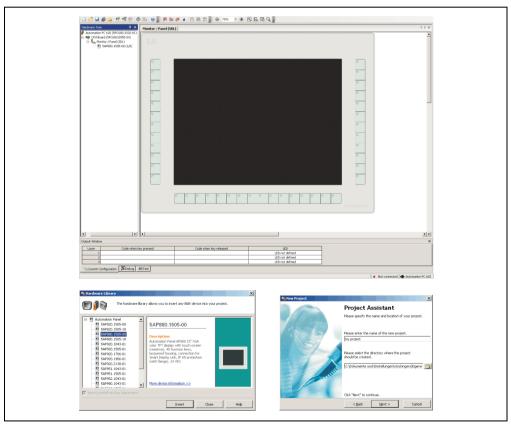


Figure 110: B&R Key Editor screenshots (Version 2.50)

Software • B&R Key Editor information

Features:

- Configuration of normal keys like on a keyboard (A, B, C, etc.)
- Key combinations/shortcuts (CTRL+C, SHIFT+DEL, etc.) on one key
- Special key functions (change brightness, etc.)
- Assign functions to LEDs (HDD access, power, etc.)
- 4 assignments per key possible (using layer function)
- Configuration of panel locking time when multiple Automation Panel 900 devices are connected to Automation PC 620 and Panel PC 700 devices

Supports following systems:

- Automation Panel 800
- Automation Panel 900
- Automation PC 620
- Panel PC 700
- Provit 2000
- Provit 5000
- Power Panel BIOS devices
- Mobile Panel BIOS devices

A detailed guide for configuring keys and LEDs can be found in the B&R Key Editor's online help.

The B&R Key Editor can be downloaded for free from the download area on the B&R homepage (www.br-automation.com). Additionally, it can also be found on the B&R HMI Drivers & Utilities DVD (model number 5SWHMI.0000-00).

2. HMI Drivers & Utilities DVD 5SWHMI.0000-00



Figure 111: HMI Drivers & Utilities DVD 5SWHMI.0000-00

Model number	Short description	Note
5SWHMI.0000-00	HMI Drivers & Utilities DVD Contains drivers, utilities, software upgrades and user's manuals for B&R panel system products (see B&R homepage – Industrial PCs, Visualization and Operation).	

Table 65: Model number - HMI Drivers & Utilities DVD

This DVD contains drivers, utilities, software upgrades and user's manuals for B&R Panel system products (see B&R homepage – Industrial PCs, Visualization and Operation). Information in detail:

BIOS upgrades for the products

- Automation PC 620
- Panel PC 700
- Automation PC 680
- Provit 2000 product family IPC2000/2001/2002
- Provit 5000 product family IPC5000/5600/5000C/5600C
- Power Panel 100 BIOS devices
- Mobile Panel 100 BIOS devices
- Power Panel 100 / Mobile Panel 100 user boot logo
- Power Panel 100 / Mobile Panel 100 REMHOST utility

Software • HMI Drivers & Utilities DVD 5SWHMI.0000-00

Drivers for the devices

- Automation Device Interface (ADI)
- Audio
- Chipset
- CD-ROM
- LS120
- Graphics
- Network
- PCI RAID controller
- Touch screen
- Touchpad
- Interface board

Updates

Firmware upgrades (e.g. MTCX, SMXC)

Utilities/Tools

- Automation Device Interface (ADI)
- Miscellaneous
- MTC utilities
- Key editor
- MTC & Mkey utilities
- Mkey utilities
- · UPS configuration software
- ICU ISA configuration
- Intel PCI NIC boot ROM
- Diagnostics
- CompactFlash lifespan calculation for Silicon Systems CompactFlash cards 5CFCRD.xxxx-03

Windows and embedded operating systems

- Thin client
- Windows CE
- Windows NT Embedded
- · Windows XP Embedded

MCAD templates for

- Industrial PCs
- Visualization and operating devices
- · Legend strip templates

Documentation for

- Automation Panel 800
- B&R Windows CE
- Automation PC 620
- Automation PC 680
- Automation Panel 900
- Panel PC 700
- Power Panel 15/21/35/41
- Power Panel 100/200
- Provit 2000
- Provit 3030
- Provit 4000
- Provit 5000
- Provit Benchmark
- Provit Mkey
- Windows NT Embedded application guide
- Windows XP Embedded application guide
- Uninterruptible power supply

Service tools

- Acrobat Reader 5.0.5 (freeware in German, English, and French)
- Power Archiver 6.0 (freeware in German, English, and French)
- Internet Explorer 5.0 (German and English)
- Internet Explorer 6.0 (German and English)

Software	HMI	Drivers	R.	Litilities	DVD	5SWHMI.0000-00
JUILWAIE '		DIIVEIS	œ	Utilities	DVD	

Chapter 5 • Standards and certifications

1. Applicable European guidelines

- EMC guidelines 89/336/EWG
- Low-voltage guidelines 73/23/EWG
- Machine guidelines 98/37/EG
- Personal Protection Equipment 93/68/EWG, 93/95/EWG and 96/58/EG

2. Overview of standards

Standard	Description
EN 55022 Class A, B	Electromagnetic compatibility (EMC), radio disturbance characteristics, information technology equipment (ITE devices), limits and methods of measurement
EN 55024	Electromagnetic compatibility (EMC), immunity characteristics, information technology equipment (ITE devices), limits and methods of measurement
EN 61000-4-2	Electromagnetic compatibility (EMC) - part 4-2: Testing and measuring techniques; electrostatic discharge immunity test
EN 61000-4-3	Electromagnetic compatibility (EMC) - part 4-3: Testing and measuring techniques; radiated radio- frequency electromagnetic field immunity test
EN 61000-4-4	Electromagnetic compatibility (EMC) - part 4-4: Testing and measuring techniques; electrical fast transient/burst immunity test
EN 61000-4-5	Electromagnetic compatibility (EMC) - part 4-5: Testing and measuring techniques; surge immunity test
EN 61000-4-6	Electromagnetic compatibility (EMC) - part 4-6: Testing and measuring techniques; immunity to conducted disturbances, induced by radio-frequency fields
EN 61000-4-8	Electromagnetic compatibility (EMC) - part 4-8: Testing and measuring techniques; power frequency magnetic field immunity test
EN 61000-4-12	Electromagnetic compatibility (EMC) - part 4-12: Testing and measuring techniques; oscillatory waves immunity test
EN 61000-4-17	Electromagnetic compatibility (EMC) - part 4-12: Testing and measuring techniques; ripple on DC input power port immunity test
EN 61000-6-2 (EN 50082-2)	Electromagnetic compatibility (EMC), generic immunity standard - part 2: industrial environments (EN 50082-2 has been replaced by EN 61000-6-2)
EN 61000-6-4 (EN 50081-2)	Electromagnetic compatibility (EMC), generic emission standard - part 2: industrial environments (EN 50081-2 has been replaced by EN 61000-6-4)

Table 66: Overview of standards

Standards and certifications • Emission requirements

Standard	Description	
EN 61131-2 IEC 61131-2	Product standard, programmable logic controllers - part 2: equipment requirements and tests	
47 CFR	Federal Communications Commission (FCC), 47 CFR Part 15 Subpart B Class A	

Table 66: Overview of standards (cont.)

3. Emission requirements

Emission	Test carried out according to	Limits according to	
Network-related emissions	EN 55022	EN 55022: Information technology equipment (ITE devices), class B (residential areas)	
		EN 61000-6-4: Generic standard (industrial areas)	
		EN 55022: Information technology equipment (ITE devices), class A (industrial areas)	
		EN 61131-2: Programmable logic controllers	
		47 CFR Part 15 Subpart B Class A (FCC)	
Emissions EN 55022		EN 55022: Information technology equipment (ITE devices), class B (residential areas)	
		EN 61000-6-4: Generic standard (industrial areas)	
		EN 55022: Information technology equipment (ITE devices), class A (industrial areas)	
		EN 61131-2: Programmable logic controllers	
		47 CFR Part 15 Subpart B Class A (FCC)	

Table 67: Overview of limits and testing guidelines for emissions

3.1 Network related emissions

Test carried out according to EN 55022	Limits according to EN 61000-6-4	Limits according to EN 55022 class A
Power mains connections 150 kHz - 500 kHz	-	79 dB (μV) quasi-peak value 66 dB (μV) average
Power mains connections 500 kHz - 30 MHz	-	73 dB (μV) quasi-peak value 60 dB (μV) average
Test carried out according to EN 55022	Limits according to EN 61000-6-4	Limits according to EN 55022 class A
AC mains connections 150 kHz - 500 kHz	79 dB (μV) quasi-peak value 66 dB (μV) average	-

Table 68: Test requirements - Network-related emissions for industrial areas

Standards and certifications • Emission requirements

AC mains connections 500 kHz - 30 MHz	73 dB (μV) quasi-peak value 60 dB (μV) average	-
Other connections 150 kHz - 500 kHz	-	97 - 87 dB (μV) and 53 - 43 dB (μA) quasi-peak value 84 - 74 dB (μV) and 40 - 30 dB (μA) average
Other connections 500 kHz - 30 MHz	-	87 dB (μV) and 43 dB (μA) quasi-peak value 74 dB (μV) and 30 dB (μA) average
Test carried out according to EN 55022	Limits according to EN 61131-2	Limits according to 47 CFR Part 15 Subpart B class A
Power mains connections ¹⁾ 150 kHz - 500 kHz	79 dB (μV) quasi-peak value 66 dB (μV) average	-
Power mains connections 500 kHz - 30 MHz	73 dB (μV) quasi-peak value 60 dB (μV) average	-
AC mains connections 150 kHz - 500 kHz	-	79 dB (μV) quasi-peak value 66 dB (μV) average
AC mains connections 500 kHz - 30 MHz	-	73 dB (μV) quasi-peak value 60 dB (μV) average
Other connections 150 kHz - 500 kHz	Only informative for cable lengths > 10 m 40 - 30 dB (μA) quasi-peak value 30 - 20 dB (μA) average	-
Other connections 500 kHz - 30 MHz	Only informative for cable lengths > 10 m 30 dB (µA) quasi-peak value 20 dB (µA) average	-

Table 68: Test requirements - Network-related emissions for industrial areas (cont.)

¹⁾ AC network connections only with EN 61131-2

Standards and certifications • Emission requirements

3.2 Emissions, electromagnetic emissions

Test carried out according to EN 55022	Limits according to EN 61000-6-4	Limits according to EN 55022 class A
30 MHz - 230 MHz measured at a distance of 10 m	< 40 dB (μV/m) quasi-peak value	< 40 dB (μV/m) quasi-peak value
230 MHz - 1 GHz measured at a distance of 10 m	< 47 dB (μV/m) quasi-peak value	< 47 dB (μV/m) quasi-peak value
Test carried out according to EN 55022	Limits according to EN 61131-2	
30 MHz - 230 MHz measured at a distance of 10 m	< 40 dB (μV/m) quasi-peak value	
230 MHz - 1 GHz measured at a distance of 10 m	< 47 dB (μV/m) quasi-peak value	
Test carried out	Limits according to 47 CFR Part 15 Subpart B class A	
30 MHz - 88 MHz measured at a distance of 10 m	< 90 dB (μV/m) quasi-peak value	
88 MHz - 216 MHz measured at a distance of 10 m	< 150 dB (μV/m) quasi-peak value	
216 MHz - 960 MHz measured at a distance of 10 m	< 210 dB (μV/m) quasi-peak value	
>960 MHz measured at a distance of 10 m	< 300 dB (μV/m) quasi-peak value	

Table 69: Test requirements - Electromagnetic emissions for industrial areas

4. Requirements for immunity to disturbances

Immunity	Test carried out according to	Limits according to	
Electrostatic discharge (ESD)	EN 61000-4-2	EN 61000-6-2: Generic standard (industrial areas)	
		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity against high-frequency	EN 61000-4-3	EN 61000-6-2: Generic standard (industrial areas)	
electromagnetic fields (HF field)		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity to high-speed transient	EN 61000-4-4	EN 61000-6-2: Generic standard (industrial areas)	
electrical disturbances (burst)		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity to surge voltages	EN 61000-4-5	EN 61000-6-2: Generic standard (industrial areas)	
		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity to conducted	EN 61000-4-6	EN 61000-6-2: Generic standard (industrial areas)	
disturbances		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity against magnetic fields	EN 61000-4-8	EN 61000-6-2: Generic standard (industrial areas)	
with electrical frequencies		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity to voltage dips, short-		EN 61000-6-2: Generic standard (industrial areas)	
term interruptions and voltage fluctuations		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	
Immunity to damped vibration	EN 61000-4-12	EN 61000-6-2: Generic standard (industrial areas)	
		EN 61000-6-2: Generic standard (industrial areas)	
		EN 61131-2: Programmable logic controllers	
		EN 55024: Information technology equipment (ITE devices)	

Table 70: Overview of limits and testing guidelines for immunity

Evaluation criteria according to EN 61000-6-2

Criteria A:

The operating equipment must continue to work as intended <u>during</u> the test. There should be no interference in the operating behavior and no system failures below a minimum operating quality as defined by the manufacturer.

Criteria B:

The operating equipment must continue to work as intended <u>after</u> the test. There should be no interference in the operating behavior and no system failures below a minimum operating quality as defined by the manufacturer.

Standards and certifications • Requirements for immunity to disturbances

Criteria C:

A temporary function failure is permitted when the function restores itself, or the function can be restored by activating configuration and control elements.

Criteria D:

Impairment or failure of the function, which can no longer be established (operating equipment destroyed).

4.1 Electrostatic discharge (ESD)

Test carried out according to EN 61000-4-2	Limits according to	Limits according to	Limits according to
	EN 61000-6-2	EN 61131-2	EN 55024
Contact discharge to powder- coated and bare metal housing parts	± 4 kV, 10 discharges, criteria B	± 4 kV, 10 discharges, criteria B	± 4 kV, 10 discharges, criteria B
Discharge through the air to plastic housing parts	± 8 kV, 10 discharges,	± 8 kV, 10 discharges,	± 8 kV, 10 discharges,
	criteria B	criteria B	criteria B

Table 71: Test requirements - Electrostatic discharge (ESD)

4.2 High-frequency electromagnetic fields (HF field)

Test carried out according to EN 61000-4-3	Limits according to	Limits according to	Limits according to
	EN 61000-6-2	EN 61131-2	EN 55024
Housing, completely wired	80 MHz - 1 GHz, 10 V/m, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A	80 MHz - 1 GHz, 1.4 - 2 GHz, 10 V/m, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A 800-960 MHz (GSM), 10 V/m, pulse modulation with 50 % duty cycle, criteria A	80 MHz - 1 GHz, 1.4 - 2 GHz, 3 V/m, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A

Table 72: Test requirements - High-frequency electromagnetic fields (HF field)

4.3 High-speed transient electrical disturbances (burst)

Test carried out according to EN 61000-4-4	Limits according to EN 61000-6-2	Limits according to EN 61131-2	Limits according to EN 55024
AC power I/O	± 2 kV, criteria B	-	± 1 kV, criteria B
AC power inputs	-	± 2 kV, criteria B	-
AC power outputs	-	± 1 kV, criteria B	-
DC power I/O >10 m ¹⁾	± 2 kV, criteria B	-	± 0.5 kV, criteria B
DC power inputs >10 m	-	± 2 kV, criteria B	-
DC power outputs >10 m	-	± 1 kV, criteria B	-
Functional ground connections, signal lines and I/Os >3 m	± 1 kV, criteria B	± 1 kV, criteria B	± 0.5 kV, criteria B
Unshielded AC I/O >3 m	-	± 2 kV, criteria B	-
Analog I/O	± 1 kV, criteria B	± 1 kV, criteria B	-

Table 73: Test requirements - High-speed transient electrical disturbances (burst)

4.4 Surges

Test carried out according to EN 61000-4-5	Limits according to EN 61000-6-2	Limits according to EN 61131-2	Limits according to EN 55024
AC power I/O, L to L	± 1 kV, criteria B	± 1 kV, criteria B	± 1 kV, criteria B
AC power I/O, L to PE	± 2 kV, criteria B	± 2 kV, criteria B	± 2 kV, criteria B
DC power I/O, L+ to L-, >10 m	± 0.5 kV, criteria B	-	-
DC power I/O, L to PE, >10 m	± 0.5 kV, criteria B	-	± 0.5 kV, criteria B
DC power inputs, L+ to L-	-	± 0.5 kV, criteria B	-
DC power inputs, L to PE	-	± 1 kV, criteria B	-
DC power outputs, L+ to L-	-	± 0.5 kV, criteria B	-
DC power outputs, L to PE	-	± 0.5 kV, criteria B	-
Signal connections >30 m	± 1 kV, criteria B	± 1 kV, criteria B	± 1 kV, criteria B
All shielded cables	-	± 1 kV, criteria B	-

Table 74: Test requirements - Surge voltages

4.5 Conducted disturbances

Test carried out according to EN 61000-4-6	Limits according to	Limits according to	Limits according to
	EN 61000-6-2	EN 61131-2	EN 55024
AC power I/O	150 kHz - 80 MHz, 10 V, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A	150 kHz - 80 MHz, 3 V, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A	150 kHz - 80 MHz, 3 V, 80 % amplitude modulation with 1 kHz, criteria A

Table 75: Test requirements - Conducted disturbances

¹⁾ For EN 55024 without length limitation.

Standards and certifications • Requirements for immunity to disturbances

Test carried out according to EN 61000-4-6	Limits according to	Limits according to	Limits according to
	EN 61000-6-2	EN 61131-2	EN 55024
DC power I/O	150 kHz - 80 MHz, 10 V, 80 %	150 kHz - 80 MHz, 3 V, 80 %	150 kHz - 80 MHz, 3 V, 80 %
	amplitude modulation with 1 kHz,	amplitude modulation with 1 kHz,	amplitude modulation with 1 kHz,
	length 3 seconds, criteria A	length 3 seconds, criteria A	criteria A
Functional ground connections	0.15 - 80 MHz, 10 V, 80 % amplitude modulation with 1 kHz, Length 3 seconds, criteria A	150 kHz - 80 MHz, 3 V, 80 % amplitude modulation with 1 kHz, length 3 seconds, criteria A	
Signal connections >3 m	0.15 - 80 MHz, 10 V, 80 %	150 kHz - 80 MHz, 3 V, 80 %	150 kHz - 80 MHz, 3 V, 80 %
	amplitude modulation with 1 kHz,	amplitude modulation with 1 kHz,	amplitude modulation with 1 kHz,
	Length 3 seconds, criteria A	length 3 seconds, criteria A	criteria A

Table 75: Test requirements - Conducted disturbances (cont.)

4.6 Magnetic fields with electrical frequencies

Test carried out according to EN 61000-4-8	Limits according to EN 61000-6-2	Limits according to EN 61131-2	Limits according to EN 55024
Test direction x, test in the field of an induction coil 1 m x 1 m	30 A/m, criteria A	30 A/m, criteria A	50 Hz, 1 A/m, criteria A
Test direction y, test in the field of an induction coil 1 m x 1 m	30 A/m, criteria A	30 A/m, criteria A	50 Hz, 1 A/m, criteria A
Test direction z, test in the field of an induction coil 1 m x 1 m	30 A/m, criteria A	30 A/m, criteria A	50 Hz, 1 A/m, criteria A

Table 76: Test requirements - Magnetic fields with electrical frequencies

4.7 Damped vibration

Test carried out according to EN 61000-4-12	Limits according to EN 61131-2	
Power I/O, L to L	± 1 kV, 1 MHz, repeat rate 400/seconds, length 2 seconds, connection lengths 2 m, criteria B	
Power I/O, L to PE	± 2.5 kV, 1 MHz, repeat rate 400/seconds, length 2 seconds, connection lengths 2 m, criteria B	

Table 77: Test requirements - Damped vibration

Standards and

5. Climate conditions

Temperature / humidity	Test carried out according to	Limits according to
Dry heat	EN 60068-2-2	EN 61131-2: Programmable logic controllers

Table 78: Overview of limits and testing guidelines for temperature and humidity

5.1 Dry heat

Test carried out according to EN 60068-2-2	Limits according to EN 61131-2	
Dry heat	16 hours at +70 °C for 1 cycle, then 1 hour acclimatization and function testing, duration approximately 17 hours	

Table 79: Test requirements - Dry heat

6. Safety

Safety	Test carried out according to	o Limits according to	
Ground resistance	EN 61131-2	EN 61131-2: Programmable logic controllers	
Residual voltage	EN 61131-2	EN 61131-2: Programmable logic controllers	

Table 80: Overview of limits and testing guidelines for safety

6.1 Leakage current

Test carried out	B&R	
Leakage current: Phase to ground	< 1 mA	

Table 81: Test requirements - Leakage current

Standards and certifications • Safety

6.2 Voltage range

Test carried out according to	Limits acc EN 61	
Supply voltage	Measurement value	Tolerance min/max
	24 VDC 48 VDC 125 VDC	-15 % +20 %
	24 VAC 48 VAC 100 VAC 110 VAC 120 VAC 200 VAC 230 VAC 240 VAC 400 VAC	15 % +10 %

Table 82: Test requirements - Voltage range

6.3 Protection type

Test carried out according to	Limits according to EN 60529	
Protection of the operating equipment	IP.6 Protection against large solid foreign bodies: dust-proof	
Protection of personnel	IP.6 Protection against touching dangerous parts with conductor	
Protection against water permeation with damaging consequences	IP.5 Protected against sprayed water	

Table 83: Test requirements - Protection

7. International certifications

B&R products and services comply with applicable standards. They are international standards from organizations such as ISO, IEC and CENELEC, as well as national standards from organizations such as UL, CSA, FCC, VDE, ÖVE, etc. We give special consideration to the reliability of our products in an industrial environment.

	Certifications
USA and Canada	All important B&R products are tested and listed by Underwriters Laboratories and checked quarterly by a UL inspector. This mark is valid for the USA and Canada and simplifies certification of your machines and systems in these areas.
Europe	All harmonized EN standards for the applicable guidelines are met.
CE	

Table 84: International certifications

8. SDL flex cable - test description

8.1 Torsion

8.1.1 Structure of the test

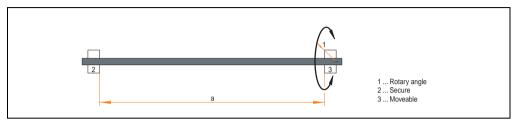


Figure 112: Test structure - torsion

8.1.2 Test conditions

Distance a: 450 mm
 Rotation angle: ± 85°

Speed: 50 cycles / minute

• Special feature: The cable was clamped down twice in the machine.

8.1.3 Individual tests

- Visible pixel errors: At the beginning of the test, the minimum equalizer setting was determined. This is the value between 0-15 at which no more pixel errors are visible. If the equalizer setting is changed due to the mechanical load, this is noted.
- Touch screen for function (with a 21.3" Automation Panel 5AP920.2138-01)
- USB mouse function
- Hot plug function tested by unplugging the USB plug
- After a test duration of 15000 cycles, the test was ended with a result of "OK".

8.2 Cable drag chain

8.2.1 Structure of the test

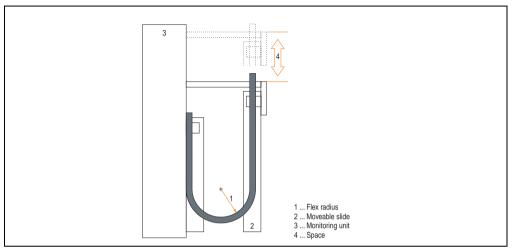


Figure 113: Test structure - cable drag chain

8.2.2 Test conditions

• Flex radius: 180 mm (= 15 x cable diameter)

Hub: 460 mmSpeed: 4800 cycles / hour

• Special feature: The cable was clamped down twice in the machine.

8.2.3 Individual tests:

- Visible pixel errors: At the beginning of the test, the minimum equalizer setting is determined. This is the value between 0-15 at which no more pixel errors are visible. If the equalizer setting is changed due to the mechanical load, this is noted.
- Touch screen for function (with a 21.3" Automation Panel 5AP920.2138-01)
- USB mouse function
- Hot plug function tested by unplugging the USB plug
- After a test duration of 30000 cycles, the test was ended with a result of "OK".

Standards and certifications • SDL flex cable - test description		

Chapter 6 • Accessories

1. Overview

Model number	Product ID	Note
5MMUSB.0128-00	USB flash drive 128 MB SanDisk USB 2.0 flash drive 128 MB	Cancelled since 03/2007
5MMUSB.0256-00	USB flash drive 256 MB SanDisk USB 2.0 flash drive 256 MB	Cancelled since 03/2007
5MMUSB.0512-00	USB flash drive 512 MB SanDisk USB 2.0 flash drive 512 MB	
5MMUSB.1024-00	USB flash drive 1 GB SanDisk USB 2.0 flash drive 1 GB	Cancelled since 03/2007
5MMUSB.2048-00	USB flash drive 2 GB SanDisk USB 2.0 flash drive 2 GB	
5AC800.EXTX-00	Legend strip template for AP800 extension for 5AC800.EXT2-00, 5AC800.EXT2-01, for 3 devices.	
5AC800.EXTX-01	Legend strip template for AP800 extension 1 for 5AC800.EXT3-00, 5AC800.EXT3-01, for 2 devices.	
5AC800.EXTX-02	Legend strip template for AP800 extension 2 for 5AC800.EXT3-04, 5AC800.EXT3-05, for 1 device right and device left.	
5AC800.EXTX-03	Legend strip template for AP800 extension 3 for 5AC800.EXT3-02, 5AC800.EXT3-03, for 3 devices.	
5AC800.150x-00	Legend strip template for AP800 display for 5AP880.1505-00, for 3 devices.	

Table 85: Model numbers - accessories

2. USB flash drive

Information:

We reserve the right to supply alternative products due to the vast quantity of flash drives available on the market and their corresponding short product lifecycle. Therefore, the following measures might be necessary in order to boot from these flash drives (e.g. the SanDisk Cruzer Micro flash drive with 512 MB):

- The flash drive must be reformatted or in some cases even re-partitioned (set active partition).
- The flash drive must be at the top of the BIOS boot order, or alternatively the IDE controllers can also be deactivated in the BIOS. This can be avoided in most cases if a "fdisk /mbr" command is also executed on the USB flash drive.

2.1 General information

USB flash drives are easy-to-exchange storage media. Because of the fast data transfer (USB 2.0), the USB flash drives are ideal for use as a portable memory medium. Without requiring additional drivers ("Hot Plug & Play" - except with Windows 98SE), the USB flash drive can be converted immediately into an additional drive where data can be read or written. Only USB flash drives from the memory specialists SanDisk are used.

2.2 Order data

Model number	Description	Image
5MMUSB.0128-00	USB flash drive 128 MB SanDisk Cruzer Mini	SanDisk Cruzer® Mini
5MMUSB.0256-00	USB flash drive 256 MB SanDisk Cruzer Mini	C C U Z e C mini Siz MB
5MMUSB.0512-00	USB flash drive 512 MB SanDisk Cruzer Mini up to Rev. E0 or Cruzer Micro starting with Rev. E0	
5MMUSB.1024-00	USB flash drive 1 GB SanDisk Cruzer Mini up to Rev. C0 or Cruzer Micro starting with Rev. C0	SanDisk Cruzer® Micro
5MMUSB.2048-00	USB flash drive 2 GB SanDisk Cruzer Micro	Cruzer micro
	Guzei micio	

Table 86: Order data - USB flash drives

2.3 Technical data

Information:

The following characteristics, features and limit values only apply to this accessory and can deviate from the entire device. For the entire device where this accessory is installed, refer to the data provided specifically for the entire device.

Features	5MMUSB.0128-00	5MMUSB.0256-00	5MMUSB.0512-00	5MMUSB.1024-00	5MMUSB.2048-00
LED Cruzer Mini / Cruzer Micro	LED (green), signals data transfer (send and receive)				
Power supply Current requirements Cruzer Mini / Cruzer Micro	Via the USB port 650 μA sleep mode, 150 mA read/write				
Interface Cruzer Mini / Cruzer Micro Type Transfer rate Sequential reading Sequential writing Connection	USB specification 2.0 high speed device, mass storage class, USB-IF and WHQL certified				
MTBF (at 25 °C) Cruzer Mini / Cruzer Micro			100,000 hours		
Data retention Cruzer Mini / Cruzer Micro			10 years		
Maintenance Cruzer Mini / Cruzer Micro			None		
Operating system support Cruzer Mini Cruzer Micro	Windows CE 4.1, CE 4.2, 98SE ¹⁾ , ME, 2000, XP, Mac OS 9.1.x and Mac OS X 10.1.2 Windows CE 4.2, CE 5.0, ME, 2000, XP and Mac OS 9.1.x+, OS X v10.1.2+				
Mechanical characteristics					
Dimensions Height - Cruzer Mini / Cruzer Micro Width - Cruzer Mini / Cruzer Micro Depth - Cruzer Mini / Cruzer Micro	62 mm / 52.2 mm 19 mm / 19 mm 11 mm / 7.9 mm				
Environmental characteristics					
Environmental temperature Cruzer Mini / Cruzer Micro Operation Storage Transport	0 °C +45 °C -20 °C +60 °C -20 °C +60 °C				
Humidity Cruzer Mini / Cruzer Micro Operation Storage Transport	10 % 90 %, non-condensing 5 % 90 %, non-condensing 5 % 90 %, non-condensing				
Vibration Cruzer Mini / Cruzer Micro Operation Storage Transport	At 10 - 500 Hz: 2 g (19.6 m/s ² 0 peak), oscillation rate 1/minute At 10 - 500 Hz: 4 g (39.2 m/s ² 0 peak), oscillation rate 1/minute At 10 - 500 Hz: 4 g (39.2 m/s ² 0 peak), oscillation rate 1/minute				

Table 87: Technical data - USB flash drive 5MMUSB.xxxx-00

Accessories • USB flash drive

Features	5MMUSB.0128-00	5MMUSB.0256-00	5MMUSB.0512-00	5MMUSB.1024-00	5MMUSB.2048-00
Shock Cruzer Mini / Cruzer Micro Operation Storage Transport		max. 80 g (7)	92 m/s ² 0-peak) and 84 m/s ² 0-peak) and 84 m/s ² 0-peak) and	11 ms length	
Altitude Cruzer Mini / Cruzer Micro Operation Storage Transport	3,048 meters 12,192 meters 12,192 meters				

Table 87: Technical data - USB flash drive 5MMUSB.xxxx-00 (cont.)

2.3.1 Temperature humidity diagram - operation and storage

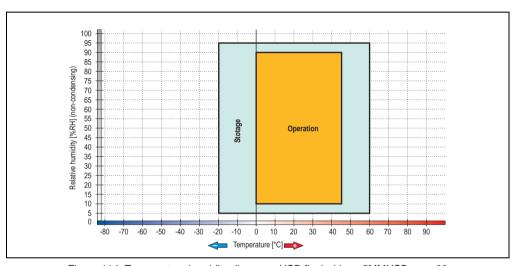


Figure 114: Temperature humidity diagram - USB flash drive - 5MMUSB.xxxx-00

2.4 Contents of delivery

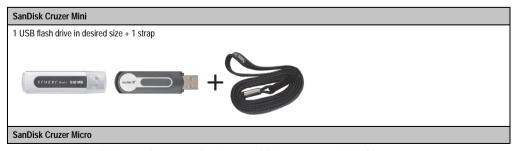


Table 88: Contents of delivery - USB flash drives 5MMUSB.xxxx-00

¹⁾ For Win 98SE, a driver can be downloaded from the SanDisk homepage.

1 USB flash drive in desired size + 2 replacement covers (blue and pink) + 1 strap¹⁾



Table 88: Contents of delivery - USB flash drives 5MMUSB.xxxx-00

1) Due to a change in the contents of delivery from the manufacturer, it is possible that the USB flash drive (with white cap) is delivered without the replacement covers or strap.

2.5 Creating a bootable USB flash drive

When used in connection with an Automation PC 620 / Panel PC 700, it is possible to boot the system from one of the flash drives available from B&R (5MMUSB.0512-00 and 5MMUSB.2048-00). The flash drive must be specially prepared for this.

2.5.1 Requirements

The following peripherals are required for creating a bootable flash drive:

- B&R USB flash drive (see model number "USB Flash Drives", on page 30)
- Automation PC 620 or Panel PC 700
- USB floppy drive (external or slide-in USB floppy 5AC600.FDDS-00)
- PS/2 or USB keyboard
- A start disk created using MS-DOS 6.22 or Windows 98 1.44MB HDD (Windows Millennium, NT4.0, 2000, XP start disks cannot be used).
 The tools "format.com" and "fdisk.exe" must be located on the diskette!

2.5.2 Procedure

- Plug in the flash drive and boot from the start disk.
- Set active partition on the flash drive using "fdisk" and follow the further instructions.
- Reboot the system from the start disk.
- Format and simultaneously transfer the system files to the flash drive with the command "format c: /s".

3. Legend strip templates

Automation Panel 800 devices with keys and the extension units are delivered with partially prelabeled key legend strips (F1, F2, etc.). The key legend strip slots are accessible on the back of the Automation Panel 800 display and extension units (above and below).

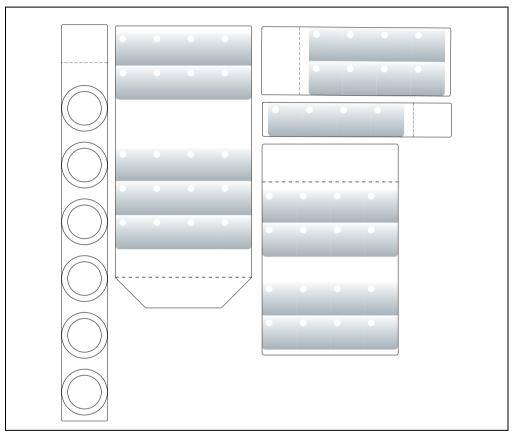


Figure 115: Legend strip templates

Printable legend strips in A4 format for the extension units and in A3 format for display unit 5AP880.1505-00 can be ordered from B&R. They can be printed using a standard laser printer (b/w or color) in a temperature range from -40 °C to +125 °C. A print template (available for Corel Draw version 7, 9 and 10) for the respective legend strip template can be downloaded from the B&R homepage www.br-automation.com. The print templates can also be found on the HMI Drivers & Utilities DVD (model number 5SWHMI.0000-00).

Accessories • Legend strip templates

3.1 Order data

Model number	Short description	Note
5AC800.EXTX-00	Legend strip template for AP800 extension for 5AC800.EXT2-00, 5AC800.EXT2-01, for 3 devices.	
5AC800.EXTX-01	Legend strip template for AP800 extension 1 for 5AC800.EXT3-00, 5AC800.EXT3-01, for 2 devices.	
5AC800.EXTX-02	Legend strip template for AP800 extension 2 for 5AC800.EXT3-04, 5AC800.EXT3-05, for 1 device right and 1 device left.	
5AC800.EXTX-03	Legend strip template for AP800 extension 3 for 5AC800.EXT3-02, 5AC800.EXT3-03, for 3 devices.	
5AC800.150x-00	Legend strip template for AP800 display for 5AP880.1505-00, for 3 devices.	

Table 89: Order data - legend strip template

Chapter 7 • Maintenance / Servicing

1. Cleaning

Danger!

Automation Panel 800 devices may only be cleaned when switched off. This is to prevent unintended functions from being triggered when touching the touch screen or pressing the buttons or entry devices.

A moist towel should be used to clean the Automation Panel 800 device. When moistening the cloth, use only water with detergent, screen cleaning agent, or alcohol (ethanol). The cleaning agent should be applied to the cloth beforehand, not sprayed directly on the Automation Panel 800 device! Never use aggressive solvents, chemicals, scouring agents, pressurized air or steam jet.

Information:

Displays with touch screens should be cleaned at regular intervals.

2. Exchanging the legend strips

Danger!

The legend strips may only be exchanged when the device is turned off, and only by knowledgeable and qualified personnel.

2.1 Procedure

2.1.1 Display

1) Loosen the screws on the back of the display (using Torx screw driver size 20).

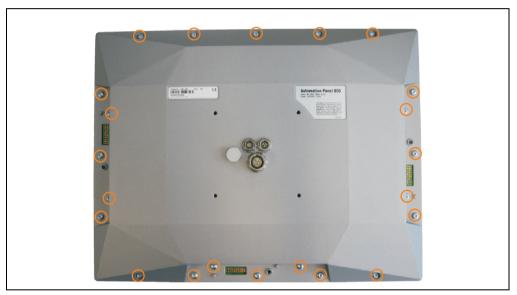


Figure 116: Remove screws

Maintenance / Servicing • Exchanging the legend strips

2) Open housing (lift carefully to the side).



Figure 117: Open housing

3) Remove blank legend strips and replace with printed ones.

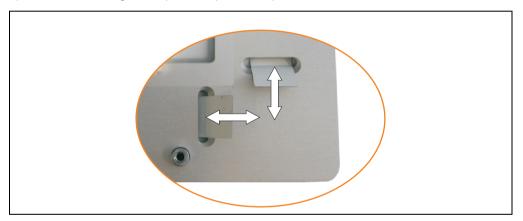


Figure 118: Exchange legend strips

4) Reassemble display in the reverse order.

2.1.2 Extension units

1) Loosen the screws on the back of the extension unit (using a size 20 Torx screw driver).



Figure 119: Remove screws

2) Open housing (lift carefully to the side).

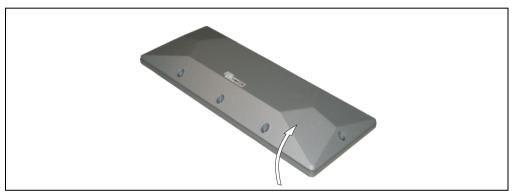


Figure 120: Open housing

3) Remove blank legend strips and replace with printed ones.

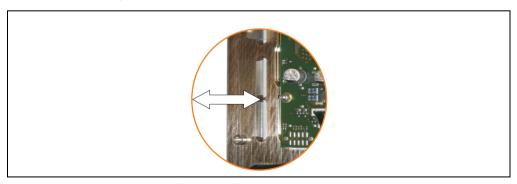


Figure 121: Exchange legend strips

4) Reassemble extension unit in the reverse order.

Appendix A

1. E-stop button

The E-stop unit consists of an E-stop switching element and an E-stop button.



Figure 122: E-stop entry device

Information:

The following characteristics, features, and limit values only apply to this individual component and can deviate from those for the entire device. For the entire device in which this individual component is used, refer to the data given specifically for the entire device.

Property	E-stop switching element	E-stop button
Manufacturer Type	RAFI 22FS switching element E-stop, 2 N.C. contacts	RAFI 22FS E-stop, not illuminated
Operating voltage AC/DC	Max. 120 V	-
Operating current AC/DC	Max. 550 mA	-
Contact system	Self-cleaning bridge contact	-

Table 90: Technical data - E-stop switching element and E-stop button

E-stop button

Property	E-stop switching element	E-stop button	
Standards Normally closed contact Weathering resistance Salt mist Protection (front side) Approbations	Positive opening contact according to IEC 947-5-1	According to IEC 68-1-2, 2-2 and 2-30 According to IEC 68-2-11 IP65 IEC 947, 1058; UL 508;CSA 22.2; EU-NSR 73/23; Ulc	
Impact resistance	At least 100 N		
Operating force	Approx. 5 N per contact element	-	
Lifespan	1 million actuations at 10 mA/24 VDC	50,000 actuations	
Ambient temperature Operation Storage Transport	-25 °C to +70 °C -40 °C to +80 °C -40 °C to +80 °C		

Table 90: Technical data - E-stop switching element and E-stop button (cont.)

2. Key switch

The key switch unit consists of a key switch switching element and a key switch.



Figure 123: Key switch unit

Information:

The following characteristics, features, and limit values only apply to this individual component and can deviate from those for the entire device. For the entire device in which this individual component is used, refer to the data given specifically for the entire device.

Property	Key switch switching element	Key switch		
Manufacturer Type	RAFI 22FS universal switching element, 1 N.O. contact	RAFI 22FS key switch, round collar		
Contact function	Ke	ey		
Operating voltage AC/DC	Max. 42 V	-		
Operating current AC/DC	Max. 100 mA	-		
Contact system	Self-cleaning bridge contact	-		
Standards Normally open contact Weathering resistance Salt mist Protection (front side) Approbations	- - - -	According to IEC 68-1-2, 2-2 and 2-30 According to IEC 68-2-11 IP65 IEC 947, 1058; UL 508;CSA 22.2; EU-NSR 73/23; ULc		
Impact resistance	At least	At least 100 N		
Angle of rotation	1 x 40 degree	1 x 40 degrees, clockwise		
Outlet position for the key	C	0		

Table 91: Technical data - key switch switching element and key switch

Key switch

Property	Key switch switching element Key switch	
Lifespan	1 million actuations at 10 mA/24 VDC 0.3 million, operations	
Ambient temperature Operation Storage Transport	-40 °C to	o +70 °C o +80 °C o +80 °C

Table 91: Technical data - key switch switching element and key switch (cont.)

2.1 Angle of rotation

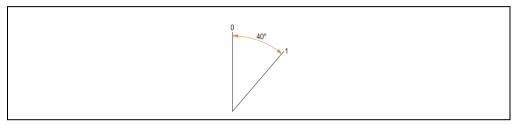


Figure 124: Angle of rotation - key switch

3. Touch screen

3.1 Elo

Information:

The following characteristics, features, and limit values only apply to this individual component and can deviate from those for the entire device. For the entire device in which this individual component is used, refer to the data given specifically for the entire device.

Elo Accu touch screen	Specifications	
Manufacturer	<u>Elo</u>	
Accuracy For < 18" diagonals For > 18" diagonals	typically < than 0.080 inches (2.032 mm) Maximum error in all directions 0,180 inches (4.752 mm) Maximum 1 % of the diagonal for the active area of the touch screens	
Reaction time	< 10 ms	
Release pressure	< 113 grams	
Resolution	4096 x 4096 touch points	
Light permeability	Up to 80 % ±5 %	
Temperature Operation Storage Transport	- 10 °C to + 50 °C - 40 °C to + 71 °C - 40 °C to + 71 °C	
Relative humidity Operation Storage Transport	Max. 90 % at max. 35 °C Max. 90 % at max. 35 °C for 240 hours, non-condensing Max. 90 % at max. 35 °C for 240 hours, non-condensing	
Waterproofing	IP65	
Lifespan	35 million contacts on the same point	
Chemical resistance 1)	Acetone, ammonia-based glass cleaner, normal food and drinks, hexane, methylene chloride, methyl ethyl ketone, mineral spirits, turpentine, isopropyl alcohol	
Activation	Finger, pointer, credit card, glove	
Drivers	Touch screen drivers can be downloaded from the download area on the B&R homepage (www.br-automation.com). Additionally, they can also be found on the B&R HMI Driver and Utilities DVD (Mod. No. 5SWHMI.0000-00).	

Table 92: Technical data - Elo Accu touch screen 5-wire

¹⁾ The active area of the touch screen is resistant to these chemicals for a timeframe of one hour at 21 °C.

3.1.1 Temperature humidity diagram - operation and storage

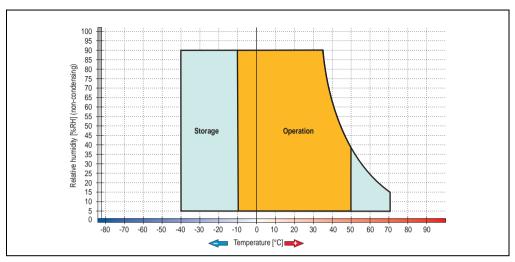


Figure 125: Temperature humidity diagram - Elo Accu touch screen 5-wire

3.1.2 Cleaning

The touch screen should be cleaned with a moist lint-free cloth. When moistening the cloth, use only water with detergent, screen cleaning agent, or alcohol (ethanol). The cleaning agent should be applied to the cloth beforehand and not sprayed directly onto the touch screen itself. Never use aggressive solvents, chemicals, scouring agents, pressurized air or steam jet.

4. Mylar

Information:

The following characteristics, features, and limit values only apply to this individual component and can deviate from those for the entire device. For the entire device in which this individual component is used, refer to the data given specifically for the entire device.

The Mylar conforms to DIN 42115 (section 2). This means it is resistant to exposure to the following chemicals for a 24-hour period with no visible signs of damage:

Ethanol Cyclohexanol Diacetone alcohol Glycol Isopropanol Glycerine Methanol Triacetin Dowandol DRM/PM	Formaldehyde 37%-42% Acetaldehyde Aliphatic hydrocarbons Toluene Xylene White spirits	1.1.1.Trichloroethane Ethyl acetate Diethyl ether N-Butyl acetate Amyl acetate Butylcellosolve Ether
Acetone Methyl ethyl ketone Dioxan Cyclohexanone MIBK Isophorone	Formic acid <50% Acetic acid <50% Absphoric acid <30% Hydrochloric acid <36% Nitric acid <10% Trichloracetic acid <50% Sulphuric acid <10%	Sodium hypochlorite <20% Hydrogen peroxide <25% Potassium carbonate Washing agents Fabric conditioner Ferric chloride Ferrous chloride (FeCl2)
Ammonia <40% Caustic soda <40% Potassium hydroxide Alkali carbonate Bichromate Potassium Acetonitrile Sodium bisulphate	Cutting oil Diesel oil Linseed oil Paraffin oil Blown castor oil Silicon oil Turpentine oil substitute Universal brake fluid Aviation fuel Petrol Water Sea water Decon	Ferrous chloride (FeCl3) Dibutyl phthalate Dioctyl phthalate Sodium carbonate

Table 93: Chemical resistance of the mylar

The Mylar conforms to DIN 42115 section 2 for exposure to glacial acetic acid for less than one hour without visible damage.

5. Perspectives

The perspectives can be seen in the technical data for the display units.

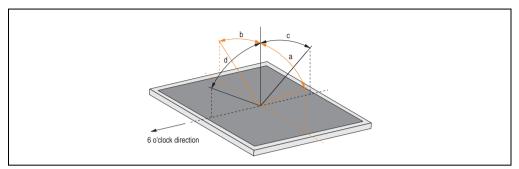


Figure 126: Perspectives

6. Glossary

Α

APC

An abbreviation for "Automation PC"

Automation Runtime

A uniform runtime system for all B&R automation components.

В

Baud rate

Measurement unit for data transfer speed. It indicates the number of states for a transferred signal per second and is measured using the baud unit of measurement. 1 baud = 1 bit/sec or 1 bps.

BIOS

An abbreviation for "Basic Input/Output System". Core software for computer systems with essential routines for controlling input and output processes on hardware components, for performing tests after system start and for loading the operating system. Although BIOS is used to configure a system's performance, the user does not usually come into contact with it.

Bit

Binary digit > binary position, binary character, smallest discrete unit of information. A bit can have the value 0 or 1.

Bit rate

The number of bits that can be transferred within a specified time unit. 1 bit/sec = 1 baud.

Bootstrap loader

A program that automatically runs when the computer is switched on or restarted. After some basic hardware tests have been carried out, the bootstrap loader starts a larger loader and hands over control to it, which in turn boots the operating system. The bootstrap loader is typically found in ROM on the computer.

Bus unit

Provit bus units consist of the housing, interface board slots and the power supply for the system units.

Byte

Data format [1 byte = 8 bits] and a unit for characterizing information amounts and memory capacity. The following units are the commonly used units of progression: KB, MB, GB.

Glossary

B&R Automation Runtime

Windows-based program for creating installation disks to install B&R Automation Runtime™ on the target system.

B&R Automation Studio

B&R Automation Studio[™] is the integrated software development environment which includes tools for all parts of an automation project, making it the foundation for applications of any size and scope. Regardless of which stage a project is in – planning, implementation, testing, production, commissioning, or service – this same environment always makes up the interface to the machine.

С

CD-ROM

Abbreviation for "Compact Disc Read-Only Memory". A removable data medium with a capacity of ~700 MB. CD-ROMs are optically scanned.

CE mark

A CE mark for a product. It consists of the letters "CE" and indicates conformity to all EU guidelines for the labeled product. It indicates that the individual or corporate body who has performed or attached the label assures that the product conforms to all EU guidelines for complete harmonization. It also indicates that all mandatory conformity evaluation procedures have taken place.

CompactFlash®

CompactFlash memory cards [CF cards] are removable, nonvolatile mass storage systems with very small dimensions [43 x 36 x 3.3 mm, approximately half the size of a credit card]. In addition to the flash memory chips, the controller is also present on the cards. CF cards provide complete PC card / ATA functionality and compatibility. A 50-pin CF card can be simply inserted in a passive 68-pin type II adapter card. It conforms to all electrical and mechanical PC card interface specifications. CF cards were launched by SanDisk back in 1994. Currently, memory capacities reach up to 8 GB per unit. Since 1995, CompactFlash Association [CFA] has been looking after standardization and the worldwide distribution of CF technology.

CPU

An abbreviation for "Central Processing Unit". Interprets and executes commands. It is also known as a "microprocessor" or "processor" for short. A processor is able to receive, decode and execute commands, as well as transfer information to and from other resources via the computer bus.

CRT

An abbreviation for "Cathode Ray Tube". The main component of a television set or a standard computer screen. A cathode ray tube consists of a vacuum tube that contains one or more electron guns. Each electron gun creates a horizontal electron beam that appears on the front

of the tube (the screen). The inner surface of the screen is coated with phosphor, which is lit when hit by the electrons. Each of the electron beams move in a line from top to bottom. In order to prevent flickering, the screen content is updated at least 25 times per second. The sharpness of the picture is determined by the number of pixels on the screen.

D

DMA

Direct Memory Access >. Accelerated direct access to a computer's RAM by bypassing the CPU.

DRAM

An abbreviation for "Dynamic Random Access Memory". Dynamic RAM consists of an integrated semiconductor circuit that stores information based on the capacitor principle. Capacitors lose their charge in a relatively short time. Therefore, dynamic RAM circuit boards must contain a logic that allows continual recharging of RAM chips. Since the processor cannot access dynamic RAM while it is being recharged, one or more waiting states can occur when reading or writing data. Although it is slower, dynamic RAM is used more often than static RAM since the simple design of the circuits means that it can store four times more data than static RAM.

DVD

An abbreviation for "Digital Versatile Disc". The next generation of optical data carrier technology. Using this technology it is possible to encode video, audio and computer data on CD. DVDs can store a higher volume of data than conventional CDs. Standard DVDs, which have a single layer, can hold 4.7 GB. Dual-layer DVDs can hold 8.5 GB. Double-sided DVDs can therefore hold up to 17 GB. A special drive is needed for DVDs. Conventional CDs can also be played on DVD drives.

Ε

EMC

"Electromagnetic Compatibility" The ability of a device or a system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment [IEV 161-01-07].

EPROM

Erasable **PROM** >(completely with ultraviolet light).

Ethernet

An IEEE 802.3 standard for networks. Ethernet uses bus or star topology and controls the traffic on communication lines using the access procedure CSMA/CD (Carrier Sense Multiple Access with Collision Detection). Network nodes are connected using coaxial cables, fiber optic cables

Glossary

or twisted pair cabling. Data transfer on an Ethernet network takes place in frames of variable lengths that consist of supply and controller information as well as 1500 bytes of data. The Ethernet standard provides base band transfers at 10 megabit and 100 megabit per second.

Ethernet POWERLINK

An enhancement of standard Ethernet. It enables data exchange under strict real-time conditions with cycle times down to 200 µs and jitter under 1 µs. This makes Ethernet power available on all communication levels of automation technology – from control levels to I/O. Ethernet POWERLINK was initiated by the company B&R Industrie-Elektronik and is now managed by the open end user and vendor association, EPSG - Ethernet POWERLINK Standardization Group (www.ethernet-powerlink.org).

F

FDD

Abbreviation for "Floppy Disk Drive". Reading device for removable magnetic memory from the early days of PC technology. Due to their sensitivity and moving components, FDDs have been almost completely replaced by CompactFlash memory in modern automation solutions.

Firmware

Programs stored permanently in read-only memory. Firmware is software used to operate computer-controlled devices that generally stays in the device throughout its lifespan or over a long period of time. Such software includes operating systems for CPUs and application programs for industrial PCs as well as programmable logic controllers (e.g. the software in a washing machine controller). This software is written in read-only memory (ROM, PROM, EPROM) and cannot be easily replaced.

Floppy

Also known as a diskette. A round plastic disk with an iron oxide coating that can store a magnetic field. When the floppy disk is inserted in a disk drive, it rotates so that the different areas (or sectors) of the disk's surface are moved under the read/write head. This allows the magnetic orientation of the particle to be modified and recorded. Orientation in one direction represents binary 1, while the reverse orientation represents binary 0.

FPC

An abbreviation for "Flat Panel Controller".

FPD

An abbreviation for "Flat Panel Display".

FTP

"File Transfer Protocol". Rules for transferring data over a network from one computer to another computer. This protocol is based on TCP/IP, which has established itself as the standard for transferring data over Ethernet networks. FTP is one of the most used protocols on the Internet. It is defined in RFC 959 in the official regulations for Internet communication.

G

GB

Gigabyte (1 GB = 230 or 1,073,741,824 bytes)

Н

HDD

An abbreviation for "Hard Disk Drive". Fixed magnetic mass memory with high capacities, e.g. 120 GB.

L

Illuminated ring keys

They are luminous rings developed by B&R. The LEDs are available in red, yellow, and green, and can be combines as one-tone or two-tone illuminated key rings. Keys are labeled using legend strips.

Interface

From the hardware point of view, an interface is the connection point between two modules/devices/systems. The units on both sides of the interface are connected by the interface lines so that data, addresses, and control signals can be exchanged. The term interface includes all functional, electrical and constructive conditions [encoding, signal level, pin assignments] that characterize the connection point between the modules, devices, or systems. Depending on the type of data transfer, a differentiation is made between parallel [e.g. Centronics, IEEE 488] and serial interfaces [e.g. V.24, TTY, RS232, RS422, RS485], which are set up for different transfer speeds and transfer distances. From the point of view of software, the term "interface" describes the transfer point between program modules using specified rules for transferring the program data.

K

Keypad modules

Keypad modules are divided into two groups: **standard keypad modules** (can be cascaded to a controller) and **special keypad modules** (must be connected by an electrician according to function, e.g. E-stop).

L

LCD

An abbreviation for "Liquid Crystal Display". A display type, based on liquid crystals that have a polarized molecular structure and are enclosed between two transparent electrodes as a thin layer. If an electrical field is applied to the electrodes, the molecules align themselves with the

Glossary

field and form crystalline arrangements that polarize the light passing through. A polarization filter, which is arranged using lamellar electrodes, blocks the polarized light. In this way, a cell (pixel) containing liquid crystals can be switched on using electrode gates, thus coloring this pixel black. Some LCD displays have an electroluminescent plate behind the LCD screen for lighting. Other types of LCD displays can use color.

LED

An abbreviation for "Light Emitting Diode". A semiconductor diode which converts electrical energy into light. LEDs work on the principle of electroluminescence. They are highly efficient because they do not produce much heat in spite of the amount of light they emit. For example, "operational status indicators" on floppy disk drives are LEDs.

M

MB

Megabyte (1 MB = 220 or 1,048,576 bytes).

Microprocessor

Highly integrated circuit with the functionality of a CPU, normally housed on a single chip. It comprises a control unit, arithmetic and logic unit, several registers and a link system for connecting memory and peripheral components. The main performance features are the internal and external data bus and address bus widths, the command set and the clock frequency. Additionally, a choice can be made between CISC and RISC processors. The first commercially available worldwide microprocessor was the Intel 4004. It came on the market in 1971.

Modem

Modulator/demodulator. > Modulation/demodulation device, add-on card, or external device that allows information to be exchanged between computers over the telephone network using digital/analog or analog/digital signal conversion.

Motherboard

A circuit board that houses the main components of a computer such as the CPU switching circuit, co-processors, RAM, ROM for firmware, interface circuits, and expansion slots for hardware expansions.

Multitasking

Multitasking is an operating mode in an operating system that allows several computer tasks to be executed virtually simultaneously.

N

.NET

DOTNET, Microsoft's new development platform that provides a common runtime library and type system for all programming languages. DOTNET is the umbrella term for the following products, strategies and technologies: .NET Framework, a new software platform, Visual Studio .NET, a new development environment that supports several .NET programming languages (e.g. C# or VB.NET, specially created for .NET), .NET My Services, a group of services taking over functions such as authentication, .NET Enterprise Server, which, apart from its name, is independent of the other technologies and includes the products Exchange Server 2000, Application Center 2000, and SQL Server 2000. .NET devices, supported by a slimmed down version of .NET Framework (.NET Compact Framework).

Ρ

Panel

A common term for B&R display units (with or without keys).

Panelware

A generic term given for standard and special keypad modules offered by B&R.

POWERLINK

See "Ethernet POWERLINK".

PROFIBUS DP

PROFIBUS for "decentralized peripherals". PROFIBUS DP can be used to allow simple digital and analog I/O modules as well as intelligent signal and data processing units to be installed in the machine room, which among other things can significantly reduce cabling costs. Often used for time-critical factory automation applications.

R

RAM

An abbreviation for "Random Access Memory". Semiconductor memory which can be read or written to by the microprocessor or other hardware components. Memory locations can be accessed in any order. The various ROM memory types do allow random access, but they cannot be written to. The term RAM refers to a more temporary memory that can be written to as well as read.

Real time

A system is operating in real time or has real-time capability if the input sizes (e.g. signals, data) are received and processed in a defined time period, and the results are made available in real time for a partner system or the system environment. See also "real-time demands" and "real-time system".

Glossary

ROM

An abbreviation for "Read-Only Memory". Semiconductor memory where programs or data were permanently stored during the production process.

RS485

Recommended Standard Number 485. Interface standard upgraded from RS422. High level: 1.5 ... -6 V, low level: +1.5 ... +6 V; 2-wire connection [half duplex operation] or 4-wire connection [full duplex operation. Cable lengths up to 1200 m, transfer rates up to 10 Mbit/s. Up to 32 participants can be connected to an RS485 bus [sender/receiver].

S

SDRAM

An abbreviation for "Synchronous Dynamic Random Access Memory". A construction of dynamic semiconductor components (DRAM) that can operate with higher clock rates than conventional DRAM switching circuits. This is made possible using block access. For each access, the DRAM determines the next memory addresses to be accessed.

SRAM

An abbreviation for "Static Random Access Memory". A semiconductor memory (RAM) made up of certain logic circuits (flip-flop) that only keeps stored information while powered. In computers, static RAM is generally only used for cache memory.

T

Task

Program unit that is assigned a specific priority by the real-time operating system. It contains a complete process and can consist of several modules.

TCP/IP

Transmission Control Protocol/Internet Suit of Protocols. Network protocol that has become the generally accepted standard for data exchange in heterogeneous networks. TCP/IP is used both in local networks for communication between various computer and also for LAN to WAN access.

Touch screen

Screen with touch sensors for activating an item with the finger.

U

UART

An abbreviation for "Universal Asynchronous Receiver-Transmitter". A module generally consisting of a single integrated circuit that combines the circuits required for asynchronous serial communication for both sending and receiving. UART represents the most common type of circuit in modems for connecting to a personal computer.

USB

An abbreviation for "Universal Serial Bus". A serial bus with a bandwidth of up to 12 megabits per second (Mbit/s) for connecting a peripheral device to a microcomputer. Up to 127 devices can be connected to the system using a single multipurpose connection, the USB bus (e.g. external CD drives.

Printer, modems, mouse and keyboard. This is done by connecting the devices in a row. USB allows devices to be changed when the power supply is switched on (hot plugging) and multi-layered data flow.

٧

Visual Components

Integrated in B&R Automation Studio. Visual Components can be used to configure visualization projects that use text and graphics.

W

Windows CE

Compact 32-bit operating system with multitasking and multithreading that Microsoft developed especially for the OEM market. It can be ported for various processor types and has a high degree of real-time capability. The development environment uses proven, well-established development tools. It is an open and scalable Windows operating system platform for many different devices. Examples of such devices are handheld PCs, digital wireless receivers, intelligent mobile phones, multimedia consoles, etc. In embedded systems, Windows CE is also an excellent choice for automation technology.



XGA

An abbreviation for "EXtended Graphics Array". An expanded standard for graphics controllers and monitors that was introduced by IBM in 1990. This standard supports 640x480 resolution with 65,536 colors or 1024x768 resolution with 256 colors. This standard is generally used in workstation systems.

Glossary

Figure 1:	Component overview - Automation Panel 800 with extension units	21
Figure 2:	Configuration - basic system	23
Figure 3:	Selection guide - optional components	24
Figure 4:	Example configurations	25
Figure 5:	Configuration - Example 1	
Figure 6:	Required components - Example 1	27
Figure 7:	Dimensions - Example 1	28
Figure 8:	Configuration - Example 2	29
Figure 9:	Required components - Example 2	29
Figure 10:	Dimensions - Example 2	30
Figure 11:	Configuration - Example 3	
Figure 12:	Required components - Example 3	31
Figure 13:	Dimensions - Example 3	
Figure 14:	Front view - 5AP820.1505-00	
Figure 15:	Rear view - 5AP820.1505-00	
Figure 16:	Temperature humidity diagram - 5AP820.1505-00	
Figure 17:	Dimensions - 5AP820.1505-00	
Figure 18:	Front view - 5AP880.1505-00	
Figure 19:	Rear view - 5AP880.1505-00	
Figure 20:	Temperature humidity diagram - 5AP880.1505-00	
Figure 21:	Dimensions - 5AP880.1505-00	
Figure 22:	Key dimensions - 5AP880.1505-00	
Figure 23:	E-stop circuit connections	
Figure 24:	Front view - 5AC800.EXT1-00	
Figure 25:	Rear view - 5AC800.EXT1-00	
Figure 26:	Dimensions - 5AC800.EXT1-00	
Figure 27:	Key dimensions - 5AC800.EXT1-00	
Figure 28:	Front view - 5AC800.EXT2-00	
Figure 29:	Rear view - 5AC800.EXT2-00	
Figure 30:	Dimensions - 5AC800.EXT2-00	
Figure 31:	Key dimensions - 5AV800.EXT2-00	
Figure 32:	Front view - 5AC800.EXT2-01	
Figure 33:	Rear view - 5AC800.EXT2-01	
Figure 34:	Dimensions - 5AC800.EXT2-01	
Figure 35:	Key dimensions - 5AC800.EXT2-01	
Figure 36:	Front view - 5AC800.EXT3-00	
Figure 37:	Rear view - 5AC800.EXT3-00	
Figure 38:	Dimensions - 5AC800.EXT3-00	
Figure 39:	Key dimensions - 5AC800.EXT3-00	
Figure 40:	Front view - 5AC800.EXT3-01	
Figure 41:	Rear view - 5AC800.EXT3-01	
Figure 42:	Dimensions - 5AC800.EXT3-01	
Figure 43:	Key dimensions - 5AC.EXT3-01	
Figure 44:	Front view - 5AC800.EXT3-02	
Figure 45:	Rear view - 5AC800.EXT3-02	
Figure 46:	Dimensions - 5AC800.EXT3-02	
Figure 47:	Key dimensions - 5AC800.EXT3-02	63

Figure index

Figure 48:	Front view - 5AC800.EXT3-03	64
Figure 49:	Rear view - 5AC800.EXT3-03	64
Figure 50:	Dimensions - 5AC800.EXT3-03	66
Figure 51:	Key dimensions - 5AC800.EXT3-03	67
Figure 52:	Front view - 5AC800.EXT3-04	68
Figure 53:	Rear view - 5AC800.EXT3-04	68
Figure 54:	Dimensions - 5AC800.EXT3-04	70
Figure 55:	Key dimensions - 5AC800.EXT3-04	71
Figure 56:	Front view - 5AC800.EXT3-05	72
Figure 57:	Rear view - 5AC800.EXT3-05	
Figure 58:	Dimensions - 5AC800.EXT3-05	
Figure 59:	Key dimensions - EXT3-05	
Figure 60:	Extension cover 5AC800.COV1-00	
Figure 61:	Dimensions - extension cover 5AC800.COV1-00	
Figure 62:	USB extension cover 5AC800.COV2-00	
Figure 63:	Dimensions - USB extension cover 5AC800.COV2-00	79
Figure 64:	Extension connector 5AC800.CON1-00	
Figure 65:	Dimensions - extension connector 5AC800.CON1-00	
Figure 66:	Extension connector 60° 5AC800.CON2-00	
Figure 67:	Dimensions - extension connector 60° 5AC800.CON2-00	83
Figure 68:	Extension flange 5AC800.FLG1-00	
Figure 69:	Dimensions - extension flange 5AC800.FLG1-00	
Figure 70:	SDL cable 5CASDL.0xxx-20 Rev. < A5	
Figure 71:	Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-20 Rev. < A5 \cdot	
Figure 72:	Pin assignments - SDL cable 5CASDL.0xxx-20 Rev. < A5	88
Figure 73:	SDL cable with extender 5CASDL.0xxx-30 Rev. < A5	
Figure 74:	Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-30 Rev. < A5.	
Figure 75:	Pin assignments - SDL cable with extender 5CASDL.0xxx-30 Rev. < A5	
Figure 76:	SDL cable 5CASDL.0xxx-20 Rev. ≥ A5	
Figure 77:	Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-20 Rev. \geq A5 .	
Figure 78:	Pin assignments - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5	
Figure 79:	SDL cable with extender 5CASDL.0xxx-30 Rev. ≥ A5	
Figure 80:	Plug dimensions (ODU Minisnap) - SDL cable 5CASDL.0xxx-30 Rev. \geq A5 .	
Figure 81:	Pin assignments - SDL cable with extender 5CASDL.0xxx-30 Rev. \geq A5	
Figure 82:	Voltage supply cable 5CAPWR.0xxx-20	
Figure 83:	Plug dimensions (ODU Minisnap) - voltage supply cable 5CAPWR.0xxx-20	97
Figure 84:	Pin assignments - voltage supply cable 5CAPWR.0xxx-20	
Figure 85:	X2X cable 5CAX2X.0xxx-20	
Figure 86:	Plug dimensions (ODU Minisnap) - X2X cable 5CAX2X.0xxx-20	
Figure 87:	Pin assignments, X2X cable 5CAX2X.0xxx-20	
Figure 88:	X2X circuit - rear view	
Figure 89:	X2X Link topology	
Figure 90:	E-stop wiring diagram for the extension cover - rear view	
Figure 91:	E-stop wiring diagram for the extension unit with E-stop - rear view	
Figure 92:	E-stop wiring diagram for the extension unit without E-stop - rear view 1	
Figure 93:	Swing arm system mounting	107
Figure 94:	Configuration example 2 - installing the components	108

Figure index Figure 95: Figure 96: Figure 97: Configuration - An AP900 and an AP800 via SDL (onboard)...... 115 Figure 98: Configuration - Three AP900 devices and an AP800 via SDL (onboard) 118 Figure 99: Figure 100: Configuration - Six AP900 and two AP800 devices via SDL (onboard) and SDL (AP Link) Figure 101: Figure 102: Example - Hardware number in the B&R Key Editor or in the B&R Control Center 126 Figure 103: Figure 104: Figure 105: Hardware numbers - 5AC800.EXT2-00 / 5AC800.EXT2-01 128 Figure 106: Hardware numbers - 5AC800.EXT3-00 / 5AC800.EXT3-01 129 Figure 107: Figure 108: Hardware numbers - 5AC800.EXT3-04 / 5AC800.EXT3-05 131 Figure 109: Figure 110: Figure 111: Figure 112: Figure 113: Temperature humidity diagram - USB flash drive - 5MMUSB.xxxx-00 156 Figure 114: Figure 115: Figure 116: Remove screws 162 Figure 117: Open housing 163 Figure 118: Figure 119: Remove screws 164 Figure 120: Figure 121: Figure 122: Figure 123: Figure 124: Figure 125: Figure 126: Perspectives 172

Figure index

Table 1:	Manual history	11
Table 2:	Organization of safety notices	16
Table 3:	Model number overview - display units	17
Table 4:	Model number overview - extensions and accessories	17
Table 5:	Model number overview - Cables	18
Table 6:	Model number overview - USB flash drives	19
Table 7:	Model number overview - legend strip templates	
Table 8:	Model numbers - other items	
Table 9:	Overview of the required components - Example 1	
Table 10:	Overview of the required components - Example 2	30
Table 11:	Overview of the required components - Example 3	32
Table 12:	Technical data - 5AP820.1505-00	34
Table 13:	Technical data - 5AP880.1505-00	38
Table 14:	Pin assignments - SDL cable connection	42
Table 15:	Pin assignments - SDL cable connection	43
Table 16:	Pin assignments - X2X / E-stop cable connection	43
Table 17:	Technical data 5AC800.EXT1-00	
Table 18:	Technical data 5AC800.EXT2-00	49
Table 19:	Technical data 5AC800.EXT2-01	52
Table 20:	Technical data - 5AC800.EXT3-00	
Table 21:	Technical data 5AC800.EXT3-01	
Table 22:	Technical data - 5AC800.EXT3-02	61
Table 23:	Technical data - 5AC800.EXT3-03	
Table 24:	Technical data - 5AC800.EXT3-04	69
Table 25:	Technical data - 5AC800.EXT3-05	
Table 26:	Technical data - 5AC800.COV1-00	
Table 27:	Contents of delivery - extension cover 5AC800.COV1-00	
Table 28:	Technical data - 5AC800.COV2-00	78
Table 29:	Contents of delivery - extension cover USB 5AC800.COV2-00	
Table 30:	Technical data - 5AC800.CON1-00	80
Table 31:	Contents of delivery - extension connector 5AC800.CON1-00	81
Table 32:	Technical data - 5AC800.CON2-00	
Table 33:	Contents of delivery - extension connector 60° 5AC800.CON2-00	83
Table 34:	Technical data - 5AC800.FLG1-00	84
Table 35:	Contents of delivery - extension flange 5AC800.FLG1-00	
Table 36:	Model number overview - Cables	
Table 37:	Technical data - SDL cable 5CASDL.0xxx-20 Rev. < A5	
Table 38:	Technical data - SDL cable with extender 5CASDL.0xxx-30 Rev. < A5	
Table 39:	Technical data - SDL cable 5CASDL.0xxx-20 Rev. ≥ A5	
Table 40:	Technical data - SDL cable with extender 5CASDL.0xxx-30 Rev. \geq A5	
Table 41:	Technical data - voltage supply cable 5CAPWR.0xxx-20	
Table 42:	Technical data - X2X cable 5CAX2X.0xxx-20	
Table 43:	E-stop circuit current load	
Table 44:	Selecting the display units	
Table 45:	Possible combinations of system unit and CPU board	
Table 46:	Cables for SDL configurations	
Table 47:	Segment lengths, resolutions and SDL cables	113

Table index

Table 48:	Requirements for SDL cable with automatic cable adjustment (equalizer)	114
Table 49:	Requirements for SDL cable with extender and automatic cable adjustment	
	(equalizer)	
Table 50:	Possible combinations of system unit and CPU board	
Table 51:	Cables for SDL configurations	
Table 52:	Segment lengths, resolutions and SDL cables	
Table 53:	Requirements for SDL cable with automatic cable adjustment (equalizer)	117
Table 54:	Requirements for SDL cable with extender and automatic cable adjustment (equalizer)	117
Table 55:	Possible combinations of system unit and CPU board	
Table 56:	Cables for SDL configurations	
Table 57:	Segment lengths, resolutions and SDL cables	119
Table 58:	Requirements for SDL cable with automatic cable adjustment (equalizer)	
Table 59:	Requirements for SDL cable with extender and automatic cable adjustment (equalizer)	
Table 60:	Possible combinations of system unit and CPU board	122
Table 61:	Cables for SDL configurations	
Table 62:	Segment lengths, resolutions and SDL cables	
Table 63:	Requirements for SDL cable with automatic cable adjustment (equalizer)	
Table 64:	Requirements for SDL cable with extender and automatic cable adjustment	
	(equalizer)	123
Table 65:	Model number - HMI Drivers & Utilities DVD	135
Table 66:	Overview of standards	
Table 67:	Overview of limits and testing guidelines for emissions	
Table 68:	Test requirements - Network-related emissions for industrial areas	
Table 69:	Test requirements - Electromagnetic emissions for industrial areas	
Table 70:	Overview of limits and testing guidelines for immunity	
Table 71:	Test requirements - Electrostatic discharge (ESD)	
Table 72:	Test requirements - High-frequency electromagnetic fields (HF field)	144
Table 73:	Test requirements - High-speed transient electrical disturbances (burst)	
Table 74:	Test requirements - Surge voltages	
Table 75:	Test requirements - Conducted disturbances	145
Table 76:	Test requirements - Magnetic fields with electrical frequencies	146
Table 77:	Test requirements - Damped vibration	146
Table 78:	Overview of limits and testing guidelines for temperature and humidity	147
Table 79:	Test requirements - Dry heat	147
Table 80:	Overview of limits and testing guidelines for safety	
Table 81:	Test requirements - Leakage current	147
Table 82:	Test requirements - Voltage range	148
Table 83:	Test requirements - Protection	
Table 84:	International certifications	149
Table 85:	Model numbers - accessories	153
Table 86:	Order data - USB flash drives	
Table 87:	Technical data - USB flash drive 5MMUSB.xxxx-00	
Table 88:	Contents of delivery - USB flash drives 5MMUSB.xxxx-00	
Table 89:	Order data - legend strip template	
Table 90:	Technical data - E-stop switching element and E-stop button	165

		Table index
Table 91:	Technical data - key switch switching element and key switch	167
Table 92:	Technical data - Elo Accu touch screen 5-wire	169
Table 93:	Chemical resistance of the mylar	171

Table index

Model number index

5
5AC800.150x-0020, 153, 160
5AC800.CON1-0017, 80
5AC800.CON2-0017, 82
5AC800.COV1-0017, 76
5AC800.COV2-0017, 78
5AC800.EXT1-0017, 44
5AC800.EXT2-0017, 48
5AC800.EXT2-0117, 51
5AC800.EXT3-0017, 54
5AC800.EXT3-0117, 57
5AC800.EXT3-0218, 60
5AC800.EXT3-0318, 64
5AC800.EXT3-0418, 68
5AC800.EXT3-0518, 72
5AC800.EXTX-0019, 153, 160
5AC800.EXTX-0119, 153, 160
5AC800.EXTX-0219, 153, 160
5AC800.EXTX-0320, 153, 160
5AC800.FLG1-00
5AP820.1505-0017, 33
5AP880.1505-0017, 37
5CAPWR.0018-20 18, 86
5CAPWR.0050-20 18, 86
5CAPWR.0100-20 18, 86
5CAPWR.0150-20 18, 86

5CAPWR.0200-20	18, 86
5CAPWR.0250-20	18, 86
5CAPWR.0300-20	18, 86
5CAPWR.0400-20	18, 86
5CASDL.0018-20	18, 86
5CASDL.0050-20	18, 86
5CASDL.0100-20	18, 86
5CASDL.0150-20	18, 86
5CASDL.0200-20	
5CASDL.0250-20	
5CASDL.0300-30	18, 86
5CASDL.0400-30	18, 86
5CAX2X.0018-20	19, 86
5CAX2X.0050-20	19, 86
5CAX2X.0100-20	19, 86
5CAX2X.0150-20	19, 86
5CAX2X.0200-20	19, 86
5CAX2X.0250-20	19, 86
5CAX2X.0300-20	
5CAX2X.0400-20	
5MMUSB.0128-00	
5MMUSB.0256-00	
5MMUSB.0512-00	
5MMUSB.1024-00	
5MMUSB.2048-00	. 19, 153, 154
5SWHMI.0000-00	20, 135

Model number index

Symbole	DMA1/5
•	DOTNET179
.NET179	DRAM175
	DSR175
Α	DTR175
A	DVD
ACOPOS173	DVI
ACPI173	DVI-A
	DVI-D
APC173	DVI-D173
API173	
Assembled17	E
Automation Runtime173	
	EDID175
В	EDO-RAM 175
Ь	EIDE175
B&R Automation Runtime174	EMC
B&R Automation Studio174	EPROM
B&R Key Editor information	ESD
•	Electrical components with housing 13
Baud rate	
BIOS173	Electrical components without housing 13
Bit173	Individual components14
Bit rate173	Packaging13
Bootstrap loader181	Proper handling13
Bus unit173	E-stop button165
Byte173	Ethernet175
	Ethernet POWERLINK176
C	Extended desktop111
C	·
Cable drag chain151	F
Cache174	Г
CAN	FDD176
	FIFO
CD-ROM	Firmware
CE mark	
Certifications149	Floppy
CMOS174	FPC
CompactFlash174	FPD176
Connection cycles87, 89	FTP176
CPU174	
CRT174	G
CTS175	
	GB177
D	
U	11
Dimension standards16	Н
DIMM175	LIDD
1/5	HDD177

Index

	PP21	179
	PROFIBUS	179
Illuminated ring keys178		
Installation107	R	
Interface177	K	
	RAM	170
K	Real time	
N.	ROM	
Key switch167		
Keypad modules	RTS	
Reypad modules177	RXD	180
	0	
L	S	
LAD177	Safety notices	13
LCD177	Installation	
LED178	Intended use	
Locking time	Operation	_
Looking time		
	Organization	
M	Policy and procedures	
	Programs	
Manual history11	Protection against electrostatic	discharges
MB178	13	
Membrane171	Touching electrical parts	15
Microprocessor178	Transport and storage	14
Model numbers17	Viruses	
Modem178	SDL cable - test description	
Motherboard	SDL cables	
Multitasking	Cable specifications	88 03
Mulliasking176	SDRAM	
	See	
N		
	SFC	
Network-related emissions140	Special keypad modules	
	SRAM	
0	Standards	139
0	SXGA	180
Overview153	System units	180
	_	
P	Т	
	Task	180
Panel179	TCP/IP	
Panelware179		
POH179	TFT display	
POST179	Torsion	
Power Panel179	Touch screen	169, 180
Powerlink		
1 OWOTHIN179		

Index

JART	181
JSB	181
JSB flash drive	154
General information	154
Order data	154
Technical data	155

W

WSXGA	
X	
XGA	181

Index