

8BAC0132.000-1

1 General information

The Analog In plug-in module 8BAC0132.000-1 can be used in an ACOPOSmulti slot. Four analog inputs are available (± 10 V differential inputs).

The analog inputs have a resolution of 14 bits and are scanned synchronously using the 50 μ s clock for the ACOPOSmulti inverter or power supply module. The analog inputs have an analog input filter with 30 kHz cutoff frequency (third-order low-pass filter).

2 Order data

Model number	Short description	Figure
	Plug-in modules	
8BAC0132.000-1	ACOPOSmulti plug-in module, 4 analog inputs ± 10 V	
	Required accessories	
	Terminal blocks	
8TB1110.20B-00	Screw clamp terminal block 10-pin, single-row, pitch: 3.5 mm, numbered consecutively, coding B: 0011111100	
8TB1110.21B-00	Cage clamp terminal block 10-pin, single-row, pitch: 3.5 mm, coding B: 0011111100	

Table 1: 8BAC0132.000-1 - Order data

3 Technical data

Model number	8BAC0132.000-1
General information	
Module type	ACOPOSmulti plug-in module
B&R ID code	0xA5CB
Slot	Slots 1 and 2
Max. power consumption	1.2 W
Certifications	
CE	Yes
KC	Yes
UL	cULus E225616
	Power conversion equipment
Module connection	
Module-side connection	10-pin multipoint connector
Status indicators	UP LED (module OK) and DN LED (module NOT OK)
Analog inputs	
Quantity	4
Digital converter resolution	14-bit
Conversion time	<10 μ s
Design	Differential input
Electrical isolation	
Input - ACOPOSmulti	Yes
Input - Input	No
Input signal	
Nominal	-10 to +10 V
Maximum	-15 to +15 V
Operating modes	Cyclic measurement synchronous to 50 μ s clock
Conversion procedure	Successive approximation
Input filter	Analog third-order low-pass filter / cutoff frequency: 30 kHz

Table 2: 8BAC0132.000-1 - Technical data

Model number	8BAC0132.000-1
Common-mode rejection	
DC	80 dB
50 Hz	80 dB
Nonlinearity	±1 LSB
Differential input impedance	>10 MΩ
Environmental conditions	
Temperature	
Operation	
Nominal	5 to 40°C
Maximum	55°C
Storage	-25 to 55°C
Transport	-25 to 70°C
Relative humidity	
Operation	5 to 85%
Storage	5 to 95%
Transport	Max. 95% at 40°C

Table 2: 8BAC0132.000-1 - Technical data

4 Wiring

4.1 Pinout

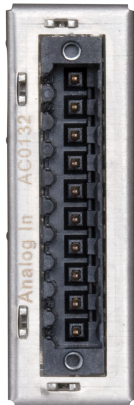

Figure	X11	Pin	Description	Function
		1	Analog I 1 +	Analog input 1 plus
		2	Analog I 1 -	Analog input 1 minus
		3	Shield (1, 2, 4, 5)	Shield connection
		4	Analog I 2 +	Analog input 2 plus
		5	Analog I 2 -	Analog input 2 minus
		6	Analog I 3 +	Analog input 3 plus
		7	Analog I 3 -	Analog input 3 minus
		8	Shield (6, 7, 9, 10)	Shield connection
		9	Analog I 4 +	Analog input 4 plus
		10	Analog I 4 -	Analog input 4 minus
Terminal cross section		[mm²]	[AWG]	
Solid core / Multiple-conductor lines		0.2 - 1.5	28 - 14	
Flexible, multiple wire line				
Without wire end sleeves		0.2 - 1.5	28 - 14	
With wire end sleeves		0.2 - 1.5	28 - 14	
Approbation data				
UL/C-UL-US		---	28 - 14	
CSA		---	28 - 14	
Tightening torque for the terminal screws [Nm]		0.2 to 0.25		

Table 3: Analog interface 8BAC0132.000-1 - Pinout

4.2 Input/Output circuit diagram

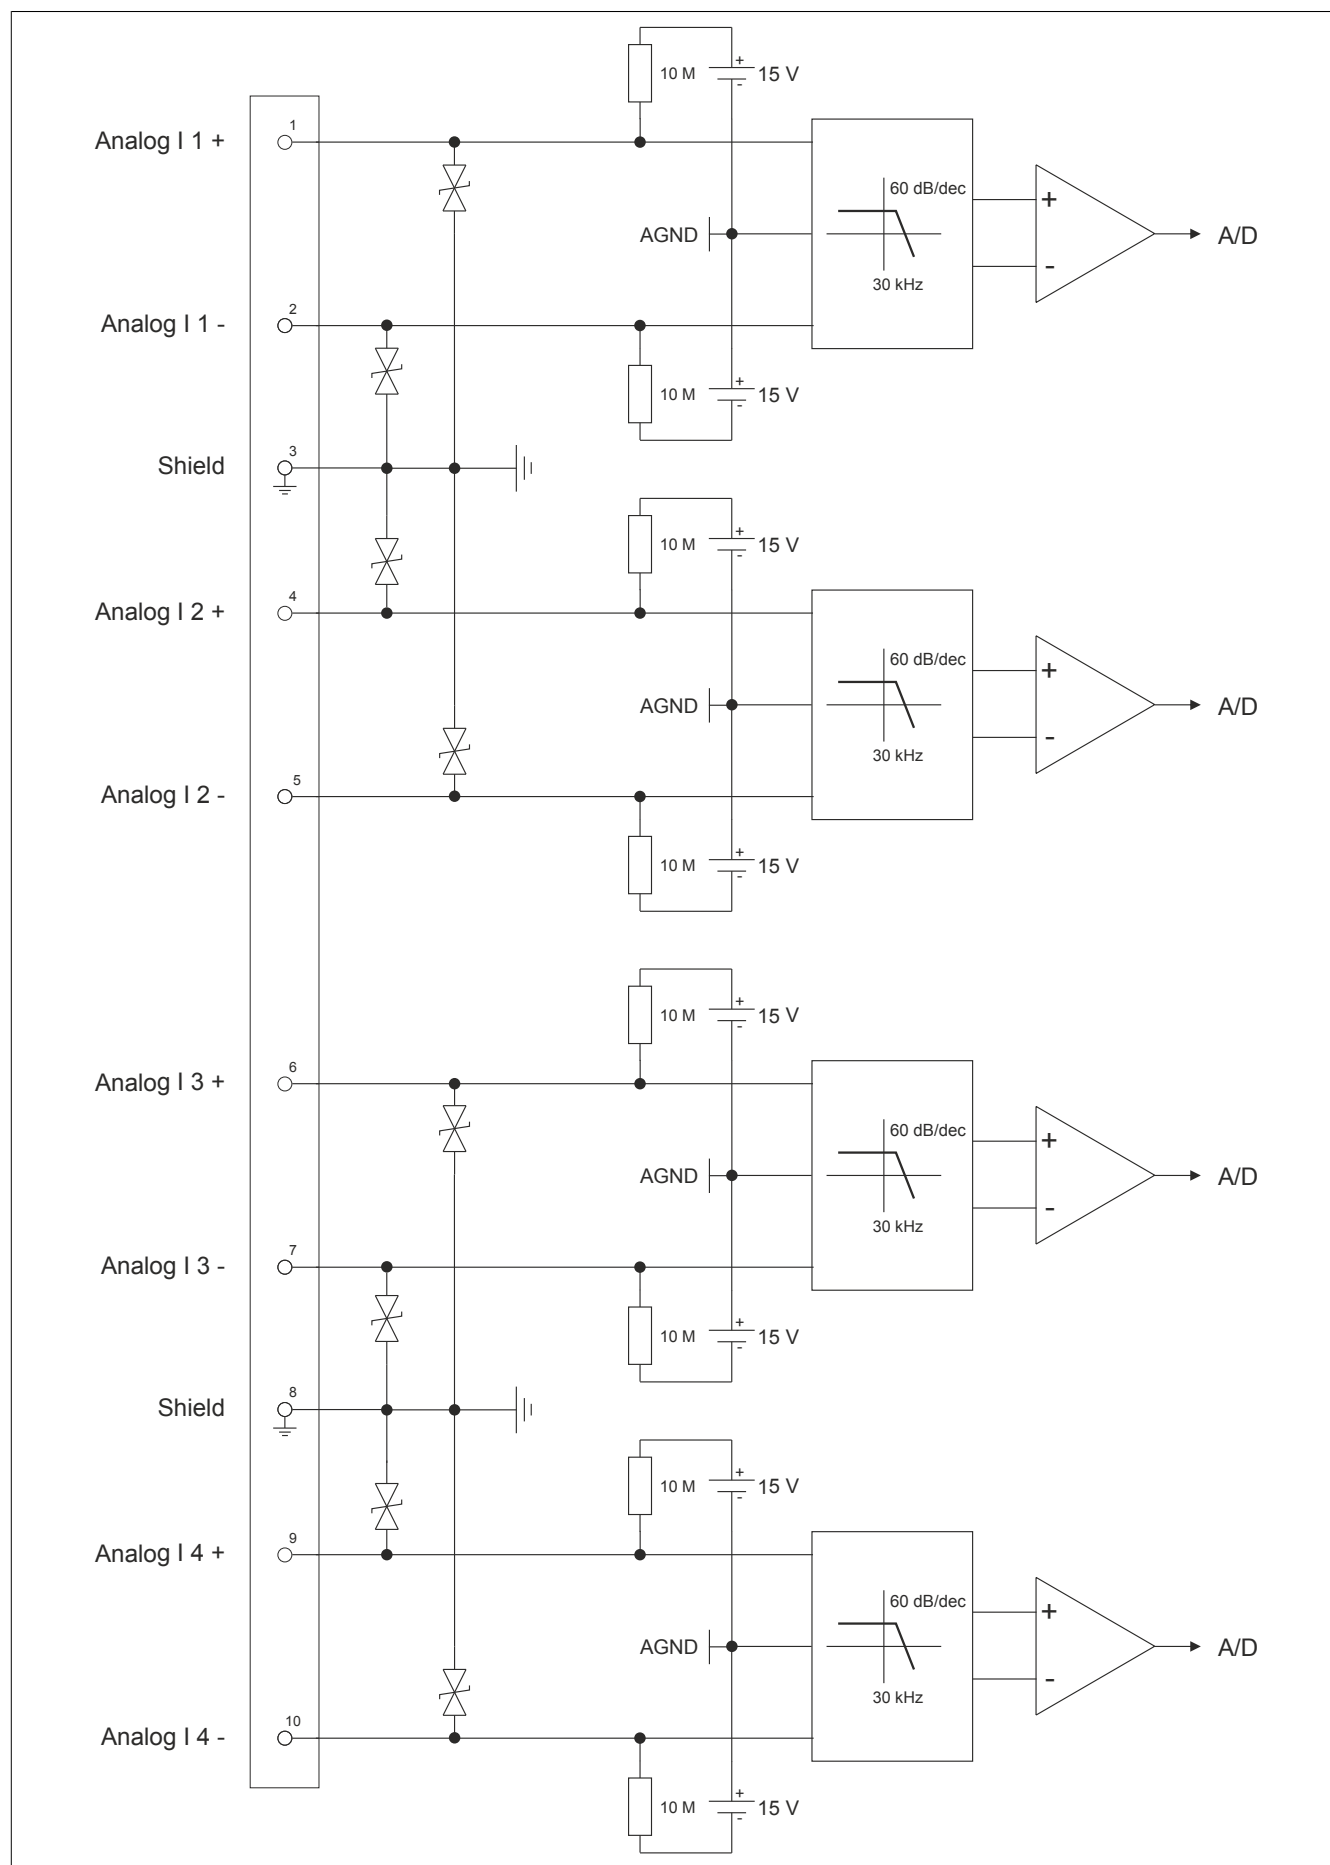


Figure 1: Input/output circuit diagram - Analog interface 8BAC0132.000-1

5 Status indicators

The indicators (LEDs UP/DN) are located on the front of the ACOPOSMulti drive or power supply module where the plug-in module is installed.

The UP/DN LEDs light up according to the module state.

UP-LED ... lit, if the module is functioning properly (green).

DN-LED ... lit, if the module is not (yet) functioning properly (red).

6 Firmware

The firmware is part of the operating system for the ACOPOSMulti drive system. Firmware is updated by updating the ACOPOSMulti operating system.