## X20BB47

### 1 General information

The bus module is a base for all X20 Fieldbus CPUs. It is equipped with 2 slots for interface modules.

The left and right end plates are included in the delivery.

- · Base for all X20 Fieldbus CPUs
- · 2 slots for interface modules
- RS232 connection
- · CAN bus connection
- · Integrated terminating resistor for CAN bus

#### Information:

The bus controller must be placed in the rightmost slot.

#### 2 Order data

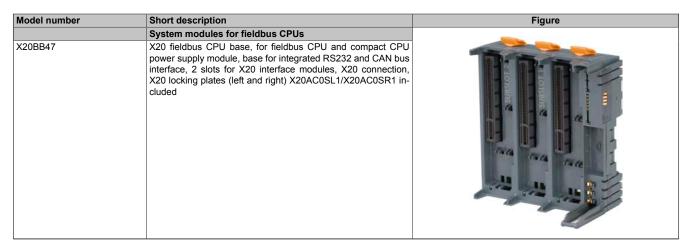


Table 1: X20BB47 - Order data

Data sheet V2.23


## 3 Technical data

Model number	X20BB47
Short description	
Bus module	X20 Fieldbus CPU base, backplane for Fieldbus CPU, Fieldbus CPU power supply module and 2 interface modules
Interfaces	1x RS232 connection, 1x CAN bus connection
General information	·
Power consumption	
Bus	0.56 W
Internal I/O	-
Additional power dissipation caused by actuators	<u> </u>
(resistive) [W]	
Certifications	
CE	Yes
KC	Yes
EAC	Yes
UL	cULus E115267
OL	Industrial control equipment
HazLoc	cCSAus 244665
TIGE CO	Process control equipment
	for hazardous locations
	Class I, Division 2, Groups ABCD, T5
ATEX	Zone 2, II 3G Ex nA nC IIA T5 Gc
	IP20, Ta (see X20 user's manual)
	FTZÚ 09 ATEX 0083X
DNV GL	Temperature: <b>B</b> (0 - 55°C)
	Humidity: B (up to 100%)
	Vibration: B (4 g)
1.0	EMC: <b>B</b> (bridge and open deck)
LR LG	ENV1
KR	Yes
I/O power supply	
Nominal voltage	24 VDC
Permissible contact load	10 A
Electrical properties	
Electrical isolation	Bus, CAN bus and RS232 not isolated from each other
Operating conditions	
Mounting orientation	
Horizontal	Yes
Vertical	Yes
Installation elevation above sea level	
0 to 2000 m	No limitations
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m
Degree of protection per EN 60529	IP20
Ambient conditions	
Temperature	
Operation	
Horizontal mounting orientation	-25 to 60°C
Vertical mounting orientation	-25 to 50°C
Derating Derating	-
Storage	-40 to 85°C
Transport	-40 to 85 °C
	-40 to 00 C
Relative humidity	E to OEO/ non condension
Operation	5 to 95%, non-condensing
Storage	5 to 95%, non-condensing
Transport	5 to 95%, non-condensing
Mechanical properties	
Note	Left and right X20 locking plates included in delivery
Spacing	87.5 <sup>+0.2</sup> mm


Table 2: X20BB47 - Technical data

2 Data sheet V2.23

# 4 Voltage routing

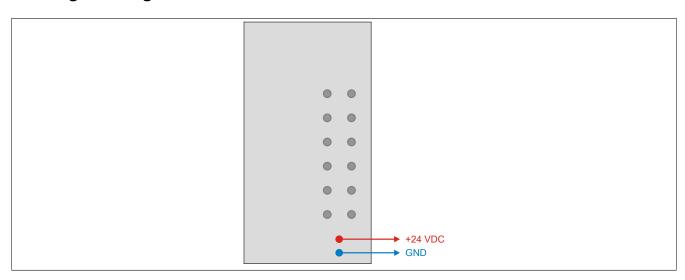

# 5 Terminating resistor for CAN bus

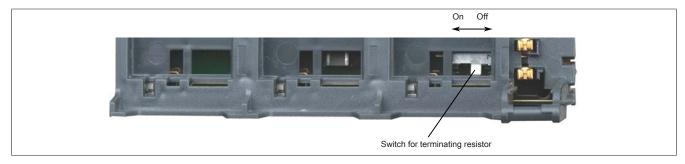

The bus module has an integrated CAN bus terminating resistor. The terminating resistor is switched on or off using a switch. An enabled terminating resistor is indicated on the power supply module by LED "T".

Data sheet V2.23