

# X20BB37

## 1 General information

The bus module is the base for all X20 Fieldbus CPUs.

The left and right end plates are included in the delivery.

- Base for all X20 Fieldbus CPUs
- RS232 connection
- CAN bus connection
- Integrated terminating resistor for CAN bus

### Information:

The bus controller must be placed in the rightmost slot.

## 2 Order data


Model number	Short description	Figure
	<b>System modules for fieldbus CPUs</b>	
X20BB37	X20 Fieldbus CPU base, for Fieldbus CPU and Compact CPU power supply module, base for integrated RS232 and CAN bus interface, slot for X20 interface module, X20 connection, X20 end cover plates (left and right) X20AC0SL1/X20AC0SR1 included	


Table 1: X20BB37 - Order data

### 3 Technical data


<b>Model number</b>	<b>X20BB37</b>
<b>Short description</b>	
Bus module	X20 Fieldbus CPU base, backplane for Fieldbus CPU, Fieldbus CPU power supply module and interface module
Interfaces	1x RS232 connection, 1x CAN bus connection
<b>General information</b>	
Power consumption	
Bus	0.56 W
Internal I/O	-
Additional power dissipation caused by actuators (resistive) [W]	-
Certifications	
CE	Yes
KC	Yes
EAC	Yes
UL	cULus E115267 Industrial control equipment
HazLoc	cCSAus 244665 Process control equipment for hazardous locations Class I, Division 2, Groups ABCD, T5
ATEX	Zone 2, II 3G Ex nA nC IIA T5 Gc IP20, Ta (see X20 user's manual) FTZÜ 09 ATEX 0083X
<b>I/O power supply</b>	
Nominal voltage	24 VDC
Permissible contact load	10 A
<b>Electrical properties</b>	
Electrical isolation	Bus, CAN bus and RS232 not isolated from each other
<b>Operating conditions</b>	
Mounting orientation	
Horizontal	Yes
Vertical	Yes
Installation elevation above sea level	
0 to 2000 m	No limitation
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m
Degree of protection per EN 60529	IP20
<b>Ambient conditions</b>	
Temperature	
Operation	
Horizontal mounting orientation	-25 to 60°C
Vertical mounting orientation	-25 to 50°C
Derating	-
Storage	-40 to 85°C
Transport	-40 to 85°C
Relative humidity	
Operation	5 to 95%, non-condensing
Storage	5 to 95%, non-condensing
Transport	5 to 95%, non-condensing
<b>Mechanical properties</b>	
Note	Left and right X20 end cover plates included in delivery
Spacing	62.5 <sup>+0.2</sup> mm

Table 2: X20BB37 - Technical data

## 4 Voltage routing

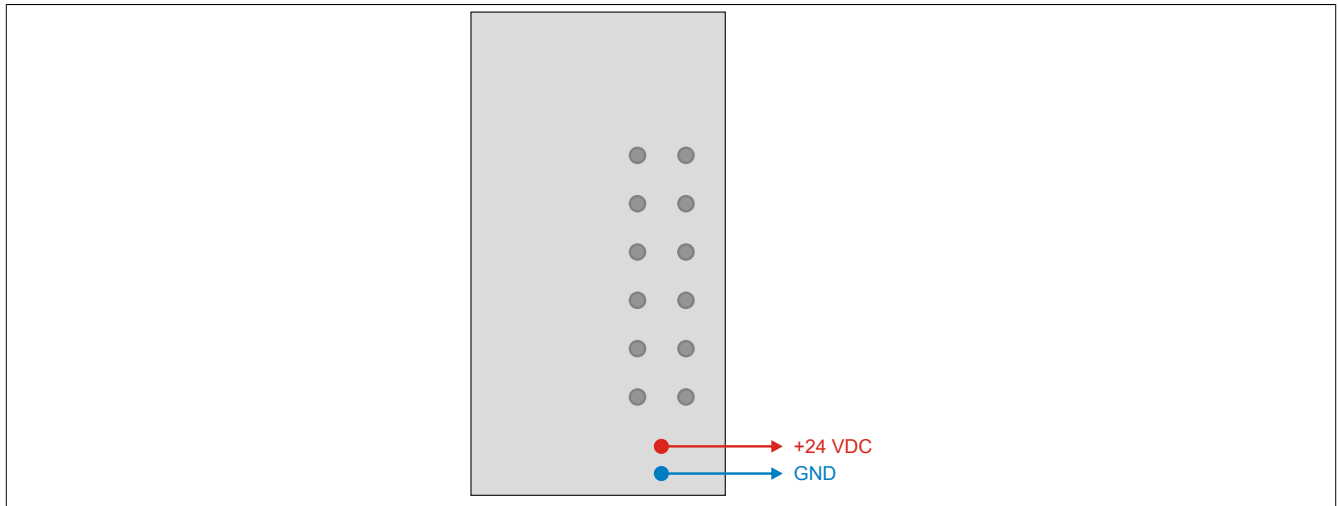

## 5 Terminating resistor for CAN bus

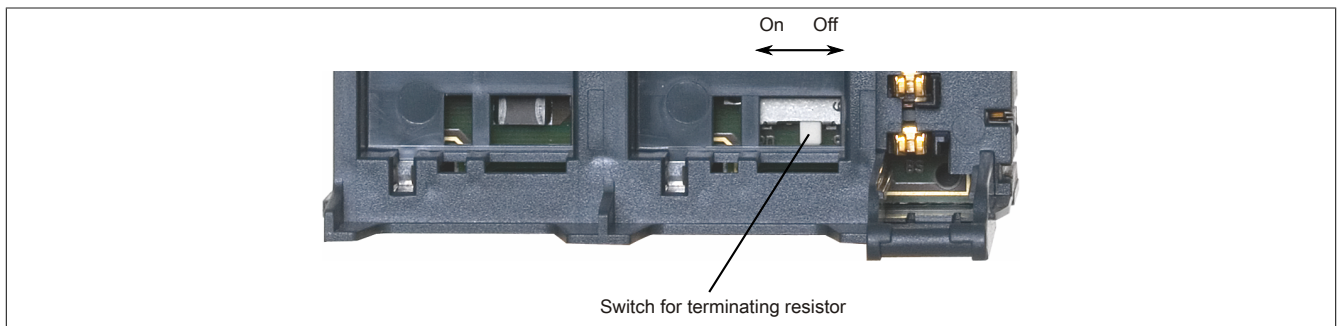

The bus module has an integrated CAN bus terminating resistor. The terminating resistor is switched on or off using a switch. An enabled terminating resistor is indicated on the power supply module by LED "T".